

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 923 430 B1

(12)

EUROPEAN PATENT SPECIFICATION = 456 22 343 P

(45) Date of publication and mention
of the grant of the patent:
03.01.2001 Bulletin 2001/01

(51) Int Cl.7: B26B 19/26

(21) Application number: 97934445.4

(86) International application number:
PCT/EP97/03529

(22) Date of filing: 04.07.1997

(87) International publication number:
WO 98/01264 (15.01.1998 Gazette 1998/02)

(54) DRY SHAVING APPARATUS
TROCKENRASIERER
APPAREIL DE BASAGE A SEC

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 05.07.1996 GB 9314159

(43) Date of publication of application:
23.03.1999 Bulletin 1839/26

(73) Proprietor: Braun GmbH
61476 Kronberg (DE)

(72) Inventors:
• PARSONAGE, Ray
Maidenhead, Berkshire SL6 5AE (GB)

- ROYLE, Terry
Fleet, Hampshire GU13 9AX (GB)
- SOUL, Peter
Reading, Berkshire RG6 7PG (GB)
- NAUBER, Andre
D-60439 Frankfurt (DE)
- HARMS, Michael
D-61440 Oberursel (DE)
- ODEMER, Michael
D-60437 Frankfurt (DE)

(56) References cited:
DE-U- 9 204 144 US-A- 2 309 431

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 923 430 B1

Description

[0001] The present invention relates to dry shaving apparatus comprising: a drive source provided in a housing; a first shaving unit having a first outer cutter and a first undercutter mounted for relative movement therebetween; and a second shaving unit having a second outer cutter and a second undercutter mounted for movement beneath said second outer cutter.

[0002] Although this specification is primarily concerned with shavers having shaving units extending in a longitudinal direction provided with linearly oscillating inner cutters as described in by US Patent 5 185 926 or German Patent DE 43 33 789 C2, it will be understood that the principles described may also readily be applied in dry shavers provided with rotating inner cutters as known by Japanese patent publication JP-A-5 317 535 or WO 96/02368.

[0003] In addition this application is also concerned with dry shaving apparatus provided with at least two shaving units being fixedly mounted on a shaver housing - US-A-5 185 926 - or mounted floatably in a shear head frame - DE 42 13 317 C2 - or mounted in a shear head being pivotally mounted on a shaver housing - WO/93/12916.

[0004] One example of linear dry shaving apparatus is known from WO 93/12916. This known apparatus includes in one embodiment three individual floating shaving units mounted in a pivotable head. The units are arranged in parallel with one unit constructed as a long hair cutter positioned centrally between two units constructed as short hair cutters. The spring biasing in the individual units is such that during use the cutter units can move up and down to follow the contours of the face and thus to improve contact with the skin during use.

[0005] It is also known from DE-B-1 003 629 to provide beneath a single perforate foil an array of four separate undercutters. The two outboard undercutters are driven together and separately from the two inboard undercutters. This allows the inboard undercutters to be driven in anti-phase from the outboard undercutters to produce a degree of dynamic balancing and reduce vibration of the housing.

[0006] Japanese Application JP-B2-8-17859 discloses a reciprocatory electric shaver comprising a central main shaving unit, having an outer foil cutter and an inner cutter, and two trimmers on respective sides of the main cutter. According to this proposal, the undercutter of the main shaving unit is caused to reciprocate in anti-phase with the undercutters of the trimmers to improve dynamic balancing.

[0007] Moreover, it is also known from German patent No. 1 004 513 and from DE-A-23 09 342 to provide a shaver with a single foil-type cutter assembly and two comb-like trimmer assemblies on respective sides of the foil type cutter assembly, where each trimmer assembly has a movable blade in contact with the skin, which blade is directly connected to the undercutter of the foil-

type cutter assembly. This allows limited catching by the trimmers of long hairs missed by the foil-type cutter.

[0008] Although foil type dry shaving apparatus operates very effectively to remove stubble, problems sometimes arise with hairs of a length representing two or three days beard growth. Such hairs no longer readily penetrate through the apertures of the foil and therefore are not cut by the interaction between the undercutter and the foil. Various attempts have been made over the years to combat this problem. For example, US Patent No. 2 309 431 discloses a dry shaver having a pair of shaving units in which not only the undercutters but also the outer skin-engaging cutters are caused to oscillate in anti-phase. By thus moving the cutting heads on the skin, the hair receiving openings were intended to move over the skin surface with a "scanning" action, so that all parts of the skin beneath the cutting head would be successively brought into register with the hair receiving openings. However, to avoid excessive discomfort it was considered inadvisable to reciprocate the outer cutting heads at more than 3 000 revolutions per minute although the undercutters were caused to reciprocate at from 3 to 5 times that frequency. Moreover, making use of a somewhat complex cam operated drive assembly, the outer cutters were reciprocated in opposite directions which produces a stationary skin zone mid-way between the cutters.

[0009] US Patent No. 4 174 569 discloses another proposal in which an outer shearing cutter is caused to oscillate in contact with the skin, whilst a further cutter oscillates beneath the outer cutter. As in US Patent No. 2 309 431, the frequency of oscillation of the inner cutter was considerably higher than that of the outer cutter.

[0010] These attempts to improve the penetration of long beard hairs through a perforated outer cutter have not been particularly successful. Moreover, the prior art seems to contain no appreciation of any possible interaction between adjacent shaving units.

[0011] An object of the invention is to provide a dry shaving apparatus in which the penetration of hairs through a perforated outer cutter is improved.

[0012] Another object of the invention is to provide dry shaving apparatus in which the hairs are positioned optimally for cutting following penetration of the outer cutter.

[0013] Another object of the invention is to provide dry shaving apparatus in which individual cutters may be driven with a desired stroke and phasing in a simple manner.

[0014] According to one aspect of the invention, there is provided a dry shaving apparatus comprising: a first individual shaving unit having at least two first cutters cooperating together; including a first outer cutter and a first undercutter; at least a second individual shaving unit having at least two second cutters cooperating together including a second outer cutter and a second undercutter; biasing means for the cooperation of said cutters; and at least one drive source coupled with at least

one cutter of each individual shaving unit, characterized in that: all cutters of at least the first of said individual shaving units are coupled to said drive source to be driven for cutting and skin agitating purposes; and the outer cutter of at least a further one of said individual shaving units is inactive.

[0015] According to another aspect of the invention, there is provided a dry shaving apparatus comprising: a first shaving unit having a first outer cutter and a first undercutter cooperating together; a second shaving unit having a second outer cutter and a second undercutter cooperating together; and a drive source mounted in a housing and coupled to at least one cutter of each shaving unit; characterised in that: the first outer cutter is coupled to the drive source and is mounted for oscillatory motion in response thereto to promote hair penetration through the first and second outer cutters; and the second outer cutter is inactive.

[0016] Preferably, a third shaving unit for short hairs is provided and comprises a third outer cutter and a third undercutter mounted for movement beneath the third outer cutter, the first unit being provided between the second and third shaving units.

[0017] In one embodiment, the first outer cutter lags the third undercutter by substantially 90°.

[0018] It will be understood that by activating the skin using the active unit, the skin surface is caused to move to and fro across the skin-engaging surface of the or each inactive unit. This aids penetration of hairs into the or each inactive unit and enhances the chance that the hairs will be cut with minimal discomfort. Further enhancement may be achieved by phase or frequency adjustment as will be described.

[0019] In one embodiment of the invention, two inactive shaving units are provided on respective sides of an active shaving unit. The outer cutter of the active unit may then be driven at the same frequency as the undercutters of the inactive units (synchronous operation) or at a different frequency (asynchronous operation). Where the frequency is the same, the phasing of the undercutters in the inactive units may be optimised with respect to the outer cutter of the active unit. It is presently believed that the best arrangement is for the undercutter of one inactive unit to lag by a small angle close to zero (for short hairs) and the undercutter of the other inactive unit to lead by 90° (for long hairs). However, the exact phasing may be set by experiment to optimise the shaving performance. It may be preferred to drive the undercutter of one inactive unit in phase with the outer cutter of the active unit and to adjust the phase of the undercutter of the other inactive unit to be optimum for long hairs (leading by about 90°) or, for practical reasons of construction, to drive the undercutters of both inactive units in phase with the outer cutter of the active unit.

[0020] Where the outer cutter of the active unit is driven at a different frequency (higher or lower) than the undercutters of the inactive units, no phase adjustment is

of course either necessary or possible, since a cyclically varying phase condition will be present.

[0021] In a simplified embodiment, only two shaving units are provided, one active and the other inactive. Here again two possibilities exist: either the outer cutter of the active unit is driven at the same frequency as the undercutter of the inactive unit, or at a different higher or lower frequency. Where the frequencies are the same, phase adjustment is possible. For reasons of simplicity, one construction provides for the outer cutter of the active unit to be driven in phase with the undercutter of the inactive unit. In such a construction, the undercutter of the active unit may be static or may be driven in anti-phase with the outer cutter.

[0022] In any of the embodiments, it may be advantageous to adapt the skin-engaging surface of the outer cutter in the active unit for enhanced grip on the skin, e.g. by roughening or by applying a high-friction coating. Moreover, to maximise the amount of skin movement over the inactive units, it may be advantageous to provide the skin-engaging surface of the (or each) inactive unit with a low-friction coating. In some circumstances, it may prove advantageous to provide the skin-engaging surface of the active unit with a low-friction coating.

[0023] For a better understanding of the invention, and to show how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings, in which:

Figure 1 is a schematic diagram showing various possibilities for oscillating the outer cutter of a long hair cutter disposed between two short hair cutters;

Figure 2 shows a series of options for driving the undercutters of two short hair cutters and the outer cutter and undercutter of a central long hair cutter;

Figure 3 shows a first embodiment of an active central long hair cutter cartridge for implementing option 2 of Figure 2;

Figure 4 shows another active long hair cutter cartridge for implementing option 2, 4 or 7 of Figure 2;

Figure 5 shows an exploded isometric view of the active long hair cutter cartridge of Figure 4;

Figure 6 shows a schematic explanatory diagram;

Figure 7 comprising Figures 7a and 7b shows a third embodiment of active long hair cutter cartridge for implementing option 2, 4 or 7 of Figure 2;

Figure 8 shows an exploded isometric view of the long hair cutter cartridge of Figure 7;

Figure 8A shows an exploded isometric view of a modification of the long hair cutter cartridge of Fig-

ures 7 and 8;

Figure 9 shows a modification of the active long hair cutter cartridge of Figs. 7 and 8;

Figure 10 shows a schematic explanatory diagram relating to the theory of operation of an active skin agitator;

Figure 11 shows an isometric view, partially cut away, of a shaver head for implementing option 7 of Figure 2;

Figure 12 shows a longitudinal sectional view of the assembly of Figure 11;

Figure 13 shows a cross-section through the centre line of the embodiment of Figure 11;

Figure 14 shows an exploded isometric view of the assembly of Figure 11 as applied to a swivel-head shaver;

Figure 14A shows an exploded isometric view of the assembly of Figure 11 as applied to a fixed-head shaver;

Figure 15 shows an isometric view of the cartridge of Figures 7 and 8 which is used in the assembly of Figure 14;

Figure 16 shows a drive member for use in the assembly of Figure 14;

Figure 17 shows the undercutter assembly for each of the short hair cutters of the assembly of Figure 11;

Figure 18 shows an exploded isometric view of the undercutter assembly of Figure 17;

Figure 19 shows a chassis member with guide rails, with an end plate cut away, for use in the assembly of Figures 11 and 20;

Figure 20 shows an isometric assembled view, partially cut away, of dry shaving apparatus for implementing option 6 of Figure 2;

Figure 21 is a longitudinal sectional view of the assembly of Figure 20;

Figure 22 is an isometric exploded view of the assembly of Figure 20;

Figure 23 is an isometric view of the drive system for the central long hair cutter cartridge of Figure 20;

Figure 24 is an isometric view of the drive assembly

for the undercutter of one short hair unit and also for the undercutter of the central long hair unit;

Figure 25 is an isometric exploded view of the drive assembly of Figure 24;

Figure 26 is an isometric view of a gear box assembly for transferring the drive from an electric motor to the individual cutter units;

Figure 27 shows a cross-section through the gear box assembly of Figure 26;

Figure 28 shows schematically various possible gear and cam pins arrangements;

Figure 29 shows various possible designs for the long hair unit outer cutter;

Figure 30 shows an isometric view of a twin drive arrangement including an oscillating long hair cutter unit, which arrangement may be used to implement option 4 of Fig. 2;

Figure 31 shows an isometric exploded view of a shaver having two shaving units for long hair and short hair respectively;

Figure 32 shows an isometric view of a fourth embodiment of active long hair cutter cartridge for implementing option 2, 4 or 7 of Figure 2;

Figure 33 shows an isometric view of the undercutter assembly of the cartridge of Figure 32;

Figure 34 shows an isometric view corresponding to Figure 33 with the undercutter removed;

Figure 35 is a side elevational view, partially in section, of the assembly of Figure 34;

Figure 36 shows two isometric views of a fifth embodiment of active long hair cutter cartridge for implementing a simplified modification of option 6 of Figure 2;

Figure 37 shows an isometric exploded view of the cartridge of Figure 36;

Figure 38 shows an isometric view of a sixth embodiment of active long hair cutter cartridge for implementing a simplified modification of option 6 of Figure 2; and

Figure 39 shows an isometric exploded view of the cartridge of Figure 38.

[0024] Figure 1 shows a diagrammatic representation

of a triple headed dry shaver having three shaving units: two outer short hair cutter units 1, 2 and a central long hair cutter unit 3, sometimes referred to as a trimmer. It has now been proposed that penetration of stubble hairs into the apertures of the long hair cutter outer cutter and the short hair cutter outer cutters may be improved by imparting an oscillatory motion to the outer cutter of the long hair cutter to cause agitation of the skin. Fig. 1 shows various possibilities (a) to (g) which have been investigated for imparting such agitation. As shown, at (a), the outer cutter may oscillate perpendicularly to the skin surface to pummel the face, or (b) parallel to the skin surface and parallel to the direction of oscillation of the undercutters of the short hair units. Alternatively, the outer cutter of the central unit may be caused to perform partial rotation about an axis perpendicular to the skin surface (c) or rocking motion about an axis parallel to the skin surface (d). Moreover, the various possible components of motion may be combined in various ways, for example as shown in the second line of Figure 1, where options (a) and (c), options (a) and (b), and options (b) and (d) are respectively combined. In the following, a shaving unit in which the outer cutter is moved to agitate the skin will be referred to as an "active unit".

[0025] In the following, methods of implementing options (b) and (f) will be discussed in more detail.

[0026] Referring now to Figure 2, various ways are possible for driving the individual cutters of a triple headed shaving system. Option 1 shows the arrangement known from WO 93/12916 discussed in the above.

[0027] Option 2 can be regarded as a modification of option 1 in which the central long hair unit is modified to impart motion also to the outer cutter. This is achieved by a link member linking the undercutter to the outer cutter, so that the outer cutter moves in anti-phase with the undercutter. This option will be described in more detail hereinafter.

[0028] Option 3 has static outer cutters in all three shaving units, but drives the undercutter of the long hair unit in phase with the undercutter of one short hair unit, whilst the other undercutter is driven in anti-phase.

[0029] Option 4 may be regarded as a modification of option 3, in which motion is also imparted to the outer cutter of the long hair cutter in a similar manner to that used in option 2.

[0030] In option 5, all outer cutters are static. The undercutters of the short hair cutters are driven in anti-phase, whereas the long hair undercutter is driven 90° out of phase with the undercutters.

[0031] Option 6 may be regarded as a modification of option 4, where the long hair cutter is active, with its outer cutter driven 90° out of phase with its undercutter rather than 180° as shown in option 4. Option 6 will be described in more detail hereinafter.

[0032] Finally, option 7 introduces a phase shift of 90° between the long hair undercutter and the two short hair undercutters which are driven in anti-phase. The long hair unit outer cutter is driven in anti-phase with its un-

dercutter.

[0033] Consideration has been given as to how the triple-headed designs disclosed in WO 92/12916 could be modified to cause the outer cutter of the central long hair cutter to move in any of the ways illustrated, by way of example, in Fig. 1. As a first approach, it is considered that a triple-headed shaver such as shown in WO 92/12916 (represented schematically as option 1 in Fig. 2) could be provided with an active long hair cutter cartridge (a cartridge in which the outer cutter moves) as shown in option 2 of Fig. 2 by making a small modification to the long hair cutter unit. Such a modified long hair cutter is shown in Fig. 3.

[0034] Within a housing 31 is provided an inner chassis member 32 and an upper chassis member 33 which are snapped together on assembly to trap a drive bridge 4 in position with tongues 19, 19a. The drive bridge 4 has flexible parts enabling the bridge 4 to perform oscillatory linear motion. Such motion is imparted to the bridge 4 by a drive pin which is receivable in an aperture 5 at the base of the drive bridge 4. At the upper part of the shaving unit, are provided an undercutter 6 and an outer cutter 7. The undercutter 6 is provided with a coupling element 8 and a bias leaf spring 9 for biasing the undercutter against the outer cutter 7. A link pin 10 engages in the coupling element 8 at one end and is received within the drive bridge 4 at the other end. Pivotally mounted to the chassis member 33 at respective ends of the shaving unit, are link arms 11 and 12. Link arm 11 is pivoted to the chassis 33 by pivot 13 whilst link arm 12 is pivoted to the chassis 33 by pivot 14. Each link arm 11, 12 has a slot 15, 16 at its lower end in which is received a drive pin 17, 18 secured to the drive bridge 4. At the upper end, each link arm 11, 12 is pivotally mounted on the outer cutter 7 by a pin 21, 22 welded to the outer cutter 7. Thus, as the drive bridge 4 is oscillated to and fro, the link arms 11 and 12 cause the outer cutter 7 to move in antiphase with the undercutter 6. During this motion, the link pin 10 remains vertical at all times. The length of the stroke of the outer cutter may be adjusted by adjusting the positioning of the pivot points 13, 14 on the arms 11 and 12.

[0035] Fig. 4 comprising Figs. 4a and 4b shows an alternative construction of long hair cartridge. The cartridge comprises a chassis assembly 56 consisting of two parallel plates 57, 58 secured together by end blocks 49, 50 including integral end latches 409 and 500. Each end block 49, 50 is welded to the side plates 56, 57 by means of pins 491, 492 or 501, 502. This construction allows shorter link arms to be used, as compared with the construction of Fig. 3. Here, the outer cutter 7 is driven directly from the coupling element 8 by means of a crank member 41 and a short arm 42 which is pivoted by a pin 43 welded to the chassis plates 57 and 58. A second pivoted arm 44 is provided at the other end of the shaving unit to retain and ensure parallel movement of the outer cutter. Arms 42 and 44 are pivotally mounted within the chassis assembly 56 by pins

49, 49 which are in turn welded to the chassis assembly. The crank member 41 is pivotally connected between one limb of coupling element 8 and arm 42 by pins 47 and 46 respectively. The coupling element 8 is welded to the undercutter 6. The upper end of arms 42, 44 are pivotable on respective pins 45, 451 which are in turn welded to the outer cutter 7. The drive pin (not shown) will engage the coupling element 8 at three points 8a, 8b and 8c. Upward loading is applied through point 8a thus imparting both float force and undercutter bias. Fig. 4a shows the inner and outer cutters 6 and 7 in a neutral, central position, whereas Fig. 4b shows the position adopted when the inner cutter 6 has moved to the left by 1.5 mm and correspondingly the outer cutter 7 has moved to the right by a shorter distance according to the spacing of the pivot points on the link member 42.

[0036] Fig. 5 shows the construction of the shaving unit of Fig. 4 in an exploded isometric view. The outer cutter 7 is of generally U-shaped cross-section and provides a plurality of comb-like teeth 51. On the base of the sidewalls of the outer cutter 7, open-ended slots 52 and 53 are provided for receiving the upper pivot pins 45, 451 of the link members 42 and 44. The undercutter 6 also has a generally U-shaped cross-section. The side walls of the cutter are secured to the coupling element 8 by welding. The coupling member 8 provides two arms, each of which is slotted to receive the crank member 41, although only one crank member is provided as already mentioned. Each arm of the coupling element 8 is provided with an aperture 54, 55 to receive a coupling pin 47 holding the crank member 41 in the slot of the coupling member 8.

[0037] The other end of the crank member 41 is received in a similar slot in the lower end of the link arm 42. All the moving parts are carried by the chassis 56 having two side walls 57 and 58, in the upper edges of which semi-circular cut-outs 59, 60, 61 and 62 are provided for receiving the pivot shafts 43, 48 of the respective link arms 42, 44.

[0038] It will be appreciated that when the outer cutter 7 is driven in the manner shown in Figs. 4 and 5, or to a lesser extent when driven in the manner shown in Fig. 3, its point of attachment to the vertical pivot arms 42, 44 or 11, 12 moves on an arcuate path. Accordingly, not only does the outer cutter move horizontally to and fro, but also it moves up and down in a vertical direction, as illustrated schematically in Fig. 6. As shown, with the geometry of the cartridge illustrated in Figs. 4 and 5, the amount of vertical travel is 0.17 mm where the horizontal travel of the undercutter is 2.60 mm, rises to 0.24 mm of vertical travel where the horizontal travel of the undercutter is 3.00 mm and rises to 0.36 mm of vertical travel where the horizontal travel of the undercutter is 3.60 mm. This degree of vertical travel enables a so-called "pulsing effect" to be produced on the user's skin, as shown in option (f) of Fig. 1. With the arrangement of Fig. 3 the pulsing effect is quite small, but may be excessive for comfort with the arrangement of Fig. 4.

[0039] If it is desired to avoid this pulsing effect, the construction shown in Fig. 7 and 8 may be employed. The construction of Fig. 7, including Figs. 7a and 7b, is similar to that shown in Fig. 4, with the exception that the upper pivot of the link arms 42 and 44 is achieved differently to allow a degree of vertical displacement between the vertical link arms and the outer cutter. In the embodiment of Fig. 4, the pivot pin 45 is pivotable within the upper aperture of the link arm 42 and is secured, e.g. by welding, in the U-shaped cut-outs 52 of the outer cutter 7. But in the embodiment of Fig. 7, as best shown in Fig. 8, the vertical link member 42a has integral bosses 45a, 45b at its upper end which are received slidably in a U-shaped slot 52a on outer cutter 7. Integral slides 81, 82 in the outer cutter 7 run in slots 83, 84 in the end blocks 49, 50 of the chassis assembly 56 to guide and retain the outer cutter 7. Otherwise, the construction of Figs. 7 and 8 is substantially identical to that shown in Figs. 4 and 5.

[0040] Fig. 8A shows a modification of the cartridge of Figs. 7 and 8 in which the outer cutter 7A has comb-like teeth along one edge only. The undercutter 8a is designed in a similar way.

[0041] Fig. 9 is a further modification of the embodiment of Figs. 7 and 8 in which the pivot links between the central coupling member 8, the crank member 41 and the vertical link arm 42a are achieved by film hinges 91 and 92. This has the advantage of simplifying fabrication, since the arms, coupling element and crank member can be manufactured as a single moulded unit.

[0042] If any of the embodiments of active long hair cutter cartridge described with reference to Figs. 3 to 9 are employed as the central long hair cutter in a triple headed shaver such as known from WO 92/12916, thus producing option 2 according to Fig. 2, a situation is achieved in which all the undercutters continue to oscillate in phase and in synchronism, whereas the outer cutter of the central long hair unit oscillates in antiphase. Although this achieves some beneficial effect in promoting hair penetration through the apertures of the outer cutters, it can be shown on the basis of theoretical considerations, and is also confirmed by practical tests, that a phase relationship of 180° is not optimal. This may be explained on the basis of Fig. 10. Fig. 10(a) shows schematically a plan view of a triple-headed shaver where the undercutters of the two short hair units are moving to the left, whereas the outer cutter of the controlling long hair cutter moves to the right. Fig. 10(b) shows the effect which this has on hairs being cut by the short hair units on either side of the long hair unit. As a consequence of the motion of the outer cutter section of the long hair cutter, a hair 101 is pressed against the right hand side of an aperture in the outer cutter of one of the short hair units. As this occurs, the undercutters will be moving to the left and accordingly will push the hair away from the side of the aperture, so that the shearing effect is not very efficient, and the cut hairs are relatively long.

[0043] Consider now the situation as shown in Fig. 10

(c), where the outer cutter of the central long hair unit moves the phase with the undercutters of the two short hair units. Here, when the hair 101 is pressed against the left-hand side of an aperture in the outer cutter of one of the short hair units, the corresponding undercutter is moving to the left and accordingly an effective shearing action takes place, and the cut hair is relatively short. This corresponds effectively to option 4 of Fig. 2 (except that in option 4 one of the short hair unit undercutters is driven in antiphase with the outer cutter of the long hair cutter).

[0044] Although good results may be expected when the long hair unit outer cutter is driven in synchronism and phase with the short hair undercutters, even better results may be achieved where the long hair outer cutter leads the trailing short hair undercutter by a phase angle of 90° . In fact, it may be stated that any phase angle in the range 0° to 120° will be effective, although substantially 90° is preferred.

[0045] Ways in which a phase angle of 90° may be achieved, as shown in options 8 and 7 of Fig. 2, will be discussed in detail hereinafter, with reference to Figs. 11 to 26. In these embodiments, the application of the invention to a triple-headed shaver is described. Here it is possible to adjust the phasing of both short hair units to lag the outer cutter of the central long hair cutter by 90° . However, it is also possible to arrange for only the trailing short hair unit to lag the central unit outer cutter by 90° . The other short hair unit may either lead the outer cutter of the central unit by 90° (option 7) or be in antiphase therewith (option 6) or have any other selectable phase if appropriate linkages are provided.

[0046] Alternatively, it is also within the scope of the invention to drive the outer cutter of the long hair unit at a lower or higher frequency than that of the short hair units, so that the phase relationship between the outer cutter of the long hair unit and the undercutters of the short hair unit varies cyclically. Such an arrangement is particularly of value if it is desired to avoid a preferential direction in use, since either short hair unit can then be regarded as the trailing unit.

[0047] Referring first of all to Fig. 11, this shows a construction which corresponds to option 7 of Fig. 2, with one end plate being cut away for improved clarity. In Fig. 11, a swivel head frame for a triple-headed shaver arrangement is illustrated in which a central long hair unit 111 is in the form of a cartridge corresponding to that shown in Figs. 7 and 8. The short hair units 112 and 113 are shown with the outer pericortical cutter (sometimes called the foil) removed. Fig. 11 thus shows the central long hair unit 111 positioned between two adjacent short hair units 112 and 113. In this embodiment, all three undercutters are independently driven and the drive for the long hair outer cutter is taken from the long hair undercutter by means of a link or drive arm as already described with reference to Figs. 7 and 8. This means that the active unit 111 can be driven at a different speed from units 112 and 113 and that the phase angle b -

tween the active outer cutter and the short hair undercutters can be set for optimum performance.

[0048] Fig. 12 is a longitudinal sectional view of the assembly of Fig. 11 with both end plates 121 and 122 in place. Also visible is a coil spring 132 for providing upward bias to the long hair undercutter. At the base of the assembly may be seen three drive slots 124, 125 and 126 for receiving respective drive pins (not illustrated) for driving the respective cutter units, as will be better understood from Fig. 14. Each end plate 121, 122 provides a bearing aperture 1211, 1221 for receiving an axle stub to permit the head to swivel.

[0049] Fig. 13 shows a cross-section taken along a vertical central plane through the assembly of Fig. 11. It shows clearly the bias springs 123, 131 and 132 for the respective shaving units. The figure also shows two guide rods 133 and 134 for modules 142, 143 and 144 as will be explained further with reference to Fig. 14. The rods 133 and 134 are received in U-shaped channels 114 and 115 in the short hair modules, and similar channels in the long hair module.

[0050] Referring now to Fig. 14, the assembly of the shaving system of Fig. 11 will be understood more clearly. As shown, the assembly is built up from six separate modules: an active long hair cartridge module 141, an active cartridge drive module 142, a first short hair undercutter module 143, a second short hair undercutter module 144 (identical to the first 143), a chassis module 145, shown with one end plate cut away, and a foil frame assembly 146, which comprises two short hair unit outer cutters 1462, 1463 mounted in a frame 1461 such that the outer cutters can move vertically but not axially. Chassis module 145 is arranged to pivot about two axle stubs (not shown) which engage in the bearing apertures in the respective end plates 121, 122. One such bearing aperture 1221 is shown in end plate 122.

[0051] The long hair module 141 is identical with that already described with reference to Figs. 7 and 8, and so will not be described further. An enlarged isometric view of the same cartridge is shown in Fig. 15.

[0052] The drive module 142, best shown in Fig. 16, consists of a generally rectangular slider frame 146 having a central cross member 147 which serves both to support a spring assembly 148 (including coil spring 132) and drive post 149 on its upper side and to provide an arcuate drive slot 125, for receiving a drive pin, on its lower side. Apertures 1421, 1423 and 1422, 1424 receive the drive rods 133, 134 for linear axial guidance of the module 142.

[0053] Drive post 149 slides vertically over a drive pin and is retained on it by a retainer 1425. The spring 132 supplies the vertical force between the slider 142 and the drive post 149 to ensure both the correct contact between the undercutter and outer cutter of the active unit, and the correct float force for the active unit.

[0054] Each of the undercutter modules 143 and 144 is identical. One of the modules is shown at an enlarged scale in Fig. 17 and in an exploded isometric view in Fig.

18, to which reference will now be directed. The module includes a generally tubular cutter 181 provided with a plurality of transverse slots 1811 to provide a plurality of arcuate blades 1812 which co-operate in a shearing action with the corresponding outer cutter (or foil) during shaving. The cutter 181 is mounted on a support 182 and held in place by two posts 1821 and 1822. At one edge of the lower side of the support 182 is provided a pair of lugs 1823 and 1824. A corresponding pair of lugs are provided on the other edge of the lower side. Apertures in the lugs 1823, 1824 snap over, and are loosely retained on, respective latch members 1836, 1837. Between each pair of lugs is defined a bearing surface, e.g. 1825, for receiving a bearing pin 1831, 1832 of a bearing block 183. Drive is transmitted to the undercutter from the bearing block 183 by means of the pins 1831, 1832, on which the support 182 can rotate and move laterally to ensure good cutter contact with the foil outer cutter.

[0055] A guide hole 1863 passes vertically through the block 183, for slidably receiving a link pin 185. A coil spring 184 surrounds the pin 184 and applies an upward biasing force against the lower surface of the bearing block 183. The lower end of the link pin 185 is rigidly secured in an aperture 1861 in a base support 186, which also provides a pair of upstanding gripping arms 1862 and 1863 for receiving respective lateral retaining lugs 1834 and 1835 of the bearing block 183. On its lower surface, the base member 186 provides the arcuate slot 124 for receiving a drive pin which imparts the necessary oscillatory motion to the undercutter. A hole 1865, and a corresponding hole 1867 at the other end of the base member 186 receive the guide rod 134 for guiding the member 186 in the axial direction.

[0056] A peg 1866 rests against the bottom of the other rod 133 and prevents rotation of the member 186 about the rod 134 in one direction.

[0057] The chassis module 145 is shown in Fig. 19, with one end plate cut away. The module, which is capable of swivelling about a longitudinal axis, consists of an arcuate base plate 191 in which three substantially rectangular apertures 192, 193 and 194 are provided for allowing access to the three drive slots 124, 125 and 126 of the respective cutter units 111, 112, 113. Extending longitudinally of the module and supported by the base plate 191 are provided two guide rods 133 and 134 for linear guidance of the three modules 142, 143 and 144. As already described, each undercutter module 142, 143, 144 comprises guide apertures 1865, 1867, 1421, 1422, 1423 and 1424 which engage with a respective one of the guide rods 133, 134 to ensure accurate linear guidance of the respective undercutter. The rods 133, 134 are retained by clips (not shown).

[0058] Figure 14A shows an alternative assembly for use in a fixed head shaver. The modules 141-144 and 145 are identical to those in Fig. 14. Module 145A differs from module 145 by being mounted fixedly to the upper end of the shaver housing so that it cannot swivel.

[0059] Reference will now be made to Figs. 20 to 25 which show how option 6 of Fig. 2 may be implemented. In this embodiment, there is a phase shift of 90° (rather than 180°) between the long hair outer cutter and its undercutter, so that the technique of driving the outer cutter from the undercutter using a drive linkage as shown in the embodiments of Figs. 3 to 9 cannot be used. Instead, the outer cutter is driven by a separate linkage, so that, if desired, the drive to the outer cutter could be disabled (e.g. by a switch) without affecting drive to the undercutter. Moreover, any desired phase relationship between the outer cutter and undercutter may be selected. Furthermore, the undercutter may even be static. Referring now to Fig. 20 in more detail, the illustrated triple-headed dry shaver 200 comprises three shaving units 201, 202 and 203. Two of the units 201 and 203 are constructed as short hair cutters. For these units, only the undercutters 2011, 2031 are shown. Outer perforate cutters, e.g. foils, of substantially conventional construction may be used to complete the short hair units. The third unit 202 is constructed as a long hair cutter in the form of an active cartridge. Fig. 21 is a longitudinal sectional view of the assembly of Fig. 20, with both side plates 204 and 205 present. Bias spring 206 for the active cartridge is visible. At the base of the assembly, three slots 207, 208 and 209, for receiving respective drive pins, are accessible through three apertures in the base plate 210.

[0060] Fig. 21 shows the slider assembly for the oscillating long hair unit 202 comprising the long hair cutter slider frame 2223, outer cutter 214, undercutter 215 and coupling latches 211 and 212. The outer cutter 214 is welded to the latches 211, 212 which in turn are fitted into the slider frame 2223 in such manner that they can move vertically but not axially. The coupling element is welded to the undercutter 215 and is retained beneath the outer cutter. A leaf spring 213 provides a force to bias the undercutter 215 against the outer cutter 214. The coil spring 206 provides float force for the unit 202.

[0061] Fig. 22 shows how the assembly 200 of Fig. 20 is made up from five modules 221, 222, 223, 224 and 225. Undercutter module 221 differs from the other undercutter module 223 in that it includes an extra drive member 2211 for transmitting drive to the undercutter of the long hair unit 202. The drive member 2211 is floatingly mounted on a coil spring 2211 to provide float pressure for the long hair cartridge 202. Otherwise, the undercutter module 221 is the same as the undercutter module illustrated in Fig. 17, so that further description may be omitted.

[0062] Module 222 includes a drive system for the outer cutter of the long hair cutter unit, and also carries the long hair unit cartridge, which engages by snap fit in two receiving latches 2221 and 2222 at respective ends of the module. The module comprises a generally rectangular frame 2223 having a cross-member 2224 at its centre. The slot 209 is provided on the lower side of the cross-member 2224 for receiving a drive pin to cause the outer cutter to oscillate.

[0063] Undercutter module 229 is identical with module 144 of Fig. 17, so that further description of this module may be omitted.

[0064] The assembly is carried on the chassis module 224, which is identical with module 145 of Fig. 19, so that further description of this module may be omitted.

[0065] The foil frame assembly 225 comprises two outer cutters 2251, 2252 for the short hair units mounted in a frame 2253, to permit vertical, but not axial, outer cutter movement.

[0066] An enlarged view of the drive system and long hair cutter module is shown in Fig. 23, and an enlarged view of the first undercutter module 221 is shown in Fig. 24.

[0067] Fig. 25 represents an exploded isometric view of the first undercutter module 221. The module comprises a tubular cutter 251, a cutter support 252, a bearing block 253, a link pin 254 and a coil spring 255 which are identical to the corresponding items of Fig. 18, so that further detailed description may be omitted. The base support 258 differs from that of Fig. 18 by the presence of a carrying lug 2213 having a circular bore therein for receiving a further link pin 2214. Pin 2214 carries the coil spring 2212 which applies bias force to the drive member 2211 for the long hair undercutter. This provides good contact between the undercutter and outer cutter and also provides the desired float force.

[0068] Fig. 26 shows a gear box which is able to be configured in various ways to provide adjustable phase relationships and frequency ratios to the individual drive units of the shaving system. The gear box comprises three parallel vertical shafts arranged in line, one of which, normally the central shaft, is directly coupled to the armature shaft of a rotary electric motor 260 as drive source. In the particular illustrated configuration, the gear box comprises three gears 261, 262 and 263 on respective shafts. Each gear also carries an offset cam pin 265, 266, 267 for engagement in a respective one of the drive slots at the base of the respective shaving units described in detail in the above, e.g. slots 124, 125 and 126 of Fig. 12 or slots 207, 208 and 209 of Fig. 21. Thus the moving components of the respective shaving units are caused to reciprocate in the manner of a Scotch yoke.

[0069] In the illustrated embodiment, all gears 261, 262 and 263 are the same size, so that cam pin 267 and pins 265 and 266 will rotate at the same speed. Gear 262 could be replaced with a smaller gear so that both the outboard shafts would rotate at the same rate, but slower than the central shaft.

[0070] Alternatively, a large gear could be used on the central shaft in mesh with two smaller gears on the outboard shafts to cause the two outboard shafts to rotate faster than the central shaft.

[0071] Phasing relationships between respective shafts can be adjusted simply by adjusting the circumferential position of the respective drive pins 265, 266 or 267, or removing the associated gear and replacing

it a new circumferential position rotated from its previous position.

[0072] Fig. 27 shows the motor 260 secured to a frame 268. Gears 261 and 263 have bearings 2611 and 2631 respectively pressed into them. Gear 262 is secured to the motor shaft 269 so that it can rotate therewith. Pin 266 is pressed into gear 262.

[0073] Referring now to Fig. 28, this contains six possible arrangements (a) to (f) for the gearing and phasing arrangements of the cam pins. Fig. 28a shows all gears with the same ratios such that the cam pins stay in the same phasing. As shown, the two outer cam pins drive the short hair undercutters in antiphase. The drive offset for each is the same.

[0074] Fig. 28b shows all gears with the same ratio, such that the cam pins stay in the same phasing. As shown, the two outer cam pins drive the short hair undercutters in antiphase. The drive offset for each of the short hair undercutters is the same. However, the middle drive provides a shorter throw.

[0075] Fig. 28c shows all gears with the same ratios such that the cam pins stay in the same phasing. As shown, the three cam pins are all 120° out of phase to each other. The drive offset for each is the same.

[0076] Fig. 28d shows the two outer gears (whose cam pins drive the short hair undercutters) with the same ratio such that the cam pins stay in the same phasing. As shown, the two outer cam pins drive in antiphase to each other. The central gear is smaller than the other two and hence its drive pin will rotate faster than the other two to give a constantly changing phase angle. As shown, the drive offset for each is the same. However, the offset of the centre drive could be made either greater or smaller than the others.

[0077] Fig. 28e shows the outer two gears whose cam pins drive the short hair undercutters with the same ratio, such that the cam pins stay in the same phase. As shown, the two outer cam pins drive in antiphase. The central gear is larger than the other two and hence its drive pin will rotate more slowly than the other two to give a constantly changing phase angle. As shown, the drive offset for each is the same. However, the offset of the centre drive could be made greater or smaller than the others.

[0078] Fig. 28f shows an alternative gear box arrangement, in which two separate gears, of differing size, are provided on the motor shaft. Each of the outboard gears is in mesh with the respective one of the gears on the motor shaft. This of course has the consequence that the two outboard shafts rotate at differing speed.

[0079] Referring now to Fig. 29, various possible designs for the long hair unit outer cutter are shown.

[0080] Fig. 29a shows the outer cutter provided with outwardly projecting teeth and a solid centre bar.

[0081] Fig. 29b shows a outer cutter having rounded projecting edges but no solid centre bar.

[0082] Fig. 29c represents a long hair unit outer cutter

corresponding to that shown in Fig. 29a but modified to have its surface textured (e.g. by sand blasting) to improve grip and change its appearance.

[0083] Fig. 29d shows a long hair unit outer cutter with outwardly projecting teeth and a solid centre bar which has been partially relieved to enhance the gripping effect.

[0084] Fig. 29e shows a long hair unit outer cutter with outwardly projecting teeth which are staggered along the length of the outer cutter and also shows the provision of a central solid bar.

[0085] It is also preferred to provide the short hair units with a low friction coating (e.g. Teflon) on the outer skin-engaging surfaces of the outer cutters to maximize movement between the skin and the outer cutters caused by the agitating element of the long hair unit.

[0086] Referring now to Fig. 30, this shows a isometric exploded view of a triple-headed shaver, having two short hair units 301, 302 and a long hair unit 303 centrally disposed between the short hair units. It differs from that shown for example in Fig. 14 or Fig. 22 primarily in the fact that it requires only two drive pins to cause oscillation of the undercutters of the short hair units. The long hair unit 303 in the form of a cartridge is driven in this embodiment by a drive member 3021 formed integrally with one of the short hair cutter units. Although this will not allow the variable phasing between the long hair unit and the short hair units possible with designs described earlier, it can be produced at lower cost.

[0087] Figure 31 shows a simplified version of shaving apparatus according to an embodiment of the invention in which only two shaving units 311 and 312 are mounted on a housing 313, having a back half 3131 and a front half 3132 which carries a switch 314. Unit 311 is for shaving short hairs, while unit 312 is for shaving long hairs and may be constructed as shown in Fig. 8A. It is mounted on an intermediate frame member 315 sandwiched between the front and back housing halves 3131 and 3132 and is adjustable in position relative to the short hair unit 311 by movement of switch 314. The frame member 315 carries a pivotally mounted driver lever 316 in engagement with the coupling element 8 of the cartridge of Fig. 8A. The unit 311 is a substantially conventional short hair unit comprising an undercutter 3111 and a foil-type outer cutter 3112 which is inactive. As will be understood, the undercutter 3111 is driven in phase with the undercutter 6a of the unit 312 and thus in anti phase with the outer cutter 7a of unit 312.

[0088] Figure 32 shows an isometric view of a further embodiment of active long hair cutter cartridge for implementing option 2, option 4 or option 7 of Figure 2. The cartridge 320 comprises an outer cutter 321 mounted on two moveable carriers 322 and 331 by means of respective securing pins 323 and 324. The outer cutter assembly 321, 322 and 331 is movably mounted on a chassis assembly comprising a first end block 325, a second end block 326 and a pair of side plates 327 and 328, only one of which is visible in Figure 32. First and

second latches 329 and 330 are formed integrally with respective end blocks 325 and 326 for securing the cartridge into the shaver head.

[0089] Figure 33 shows an isometric view of the cartridge of Figure 32 with the outer cutter 321 and one side plate 327 of the chassis removed to expose the undercutter 332 mounted on a moveable carrier 333 from which extends a pair of coupling members 334 and 335. The moveable carriers 322 and 331 for the outer cutter are each connected to a respective linkage pivotably mounted on the chassis. Carrier 322 is mounted on an arm 336 pivotably connected to the side plates of the chassis at 337. Carrier 331 is coupled by means of a flexible linkage 338 to the carrier 333 for the undercutter 332. The linkage 338 is pivotably connected at 339 to the side plates of the chassis. The flexible linkage 338 will be described in more detail with reference to Figure 35.

[0090] Figure 34 shows the undercutter assembly with the undercutter itself removed to show more clearly the construction of the undercutter carrier 333.

[0091] Referring now to Figure 35, the construction of the flexible linkage 338 will be described. The moveable carrier 331 is integrally connected via a first film hinge 351 to a double arm lever 352 which is integrally connected via a second film hinge 353 to a stabiliser 354 which in turn is integrally connected via a third film hinge 355 to a double arm lever or bell crank 356, which is pivotably connected at 339 to the side walls of the chassis. The double arm lever or bell crank 356 is integrally connected via a fourth film hinge 357 to a second stabiliser 358 which in turn is coupled by a fifth film hinge 359 to the carrier 333 for the undercutter.

[0092] It will be appreciated that when a drive source is coupled to the carrier 333 by means of a drive pin engaging between the coupling members 334 and 335, the carrier 333 is caused to reciprocate together with its undercutter 332. This movement is transmitted to the bell crank 356 which is caused to oscillate about the pivot 339. This oscillatory motion is then transmitted to the lever 352 and hence to the carrier 331 for the outer cutter 321. In this way, the outer cutter 321 is caused to reciprocate in anti-phase with the undercutter 332.

[0093] Figure 36 shows an isometric view of a further embodiment of active long hair cutter cartridge, particularly suitable for implementing option 5 of Figure 2. The cartridge 360 comprises an outer cutter 361 slidably mounted on an undercutter 362 which is mounted in the shaving head by means of respective latches 363 and 364. Being mounted in this way, the undercutter is static and only the outer cutter 361 moves. The left hand view (a) of Figure 36 shows the outer cutter 361 in the central position on the undercutter 362. The righthand view (b) of Figure 36 shows the outer cutter 361 displaced fully to the left on the undercutter 362. In this embodiment, the outer cutter is pressed into contact with the undercutter 362 by means of a leaf spring 365. Extending downwardly from the centre of the outer cutter 361 are

two coupling members 366 and 367 for receiving the drive pin of the motor therebetween to cause oscillatory motion of the outer cutter 361.

[0094] Figure 37 shows the undercutter assembly 362 removed from engagement between the upper part of the outer cutter 361 and the leaf spring 365. As shown, the undercutter assembly comprises an undercutter member 360 secured to respective end blocks 371 and 372, from which the respective latches 383 and 384 extend.

[0095] Figure 38 shows a further embodiment of active long hair cutter cartridge which is in effect a modification of the embodiment of Figures 36 and 37. The cartridge 380 again comprises a movable outer cutter assembly 381 and a static undercutter assembly 382. Again, a pair of coupling members 383 and 384 extend downwardly from the sidewalls of the outer cutter assembly 381. Here however the coupling members 383 and 384 are extended to respective ends of the outer cutter assembly 381 and engage between a pair of side members 395 at one end and 396 at the other end. Each coupling member extension provides a support pip for retaining a respective barrel spring 387 and 388 as emerges more clearly from Figure 39.

[0096] In Figure 39, the respective support pips 391 and 392 for the barrel springs 387 and 388 may be more clearly seen.

[0097] It will be appreciated that both in the embodiment of Figures 36 and 37 and in the embodiment of Figures 38 and 39 only the outer cutter assembly is caused to move by engagement with the drive pin from the motor. Since only the outer cutter moves, the drive linkage for the cartridge is considerably simpler than that required for the other active cartridges in which both the outer cutter and undercutter move. These embodiments may be used where simplicity and economy are primary considerations. In a very simple embodiment, only two shaving units are provided, one active and the other inactive. The active unit may be constructed according to Figs. 36 and 37 or Figs. 38 and 39. The undercutter of the inactive unit may then be directly coupled to the outer cutter of the active unit and driven in phase therewith in a very simple manner.

[0098] The invention has been described in connection with numerous embodiments, but further embodiments are possible and will occur to those skilled in the art. In the claims, the expressions "first", "second" and "third" are used to qualify various components. These expressions are simply convenient labels for identification purposes and have no further significance.

Claims

1. Dry shaving apparatus comprising:

a first individual shaving unit (141; 222) having at least two first cutters (7, 6) cooperating to-

gether, including a first outer cutter (7) and a first undercutter (6);

at least a second individual shaving unit (112, 113; 261, 203) having at least two second cutters cooperating together including a second outer cutter (1462, 1463; 2251, 2252) and a second undercutter (181, 251);

biasing means for the cooperation of said cutters; and

at least one drive source (260) coupled with at least one cutter of each individual shaving unit,

characterized in that:

all cutters of at least the first of said individual shaving units are coupled to said drive source to be driven for cutting and skin agitating purposes; and

the outer cutter of at least a further one of said individual shaving units is inactive.

2. Dry shaving apparatus comprising:

a first shaving unit (141; 222) comprising a first outer cutter (7) and a first undercutter (6) cooperating together;

a second shaving unit (112, 113; 261, 203) having a second outer cutter (1462, 1463; 2251, 2252) and a second undercutter (181; 251) cooperating together; and

a drive source (260) mounted in a housing and coupled with at least one cutter of each shaving unit;

characterised in that:

the first outer cutter (7) is coupled to the drive source (260) and is mounted for oscillatory movement in response thereto to serve as a skin agitation member; and the second outer cutter is inactive.

3. Apparatus according to claim 1 or 2 wherein more than half of the cutters are coupled to the drive source.

4. Apparatus according to any one of claims 1 to 3 wherein the second undercutter is arranged to be driven with oscillatory motion.

5. Apparatus according to claim 4 wherein the first undercutter is coupled to be oscillated in phase with the second undercutter.

6. Apparatus according to claim 4 or 5 wherein the first outer cutter is coupled to the drive source in a manner to be driven at a frequency which differs from that of said second undercutter.

7. Apparatus according to claim 6 wherein the fre-

quency ratio between that of the second undercutter and of the first outer cutter is in the range 0.5 to 2.

8. Apparatus according to claim 7 wherein the first outer cutter is arranged to be driven at a lower frequency than said second undercutter. 5
9. Apparatus according to claim 4 or 5 wherein the first outer cutter is coupled to the drive source in a manner such that it leads or lags the second undercutter by a phase angle in the range 0° to 135° . 10
10. Apparatus according to claim 9 wherein the phase angle is in the range 0° to 90° . 15
11. Apparatus according to claim 10 wherein the phase angle is substantially 0° for short hairs. 20
12. Apparatus according to claim 10 wherein the phase angle is substantially 90° lagging for long hairs. 25
13. Apparatus according to any one of claims 4 to 12 wherein the first outer cutter (7) is decoupled from the first undercutter. 30
14. Apparatus according to any one of claims 1 to 13 wherein the first outer cutter is mounted for linear reciprocation. 35
15. Apparatus according to any one of claims 1 to 13 wherein the first outer cutter is mounted for rotary reciprocation. 40
16. Apparatus according to any preceding claim further comprising a third shaving unit (113; 209), having a third outer cutter (1483; 2252) and a third undercutter (181; 251) coupled to the drive source (260) and mounted for movement relative to the third outer cutter. 45
17. Apparatus according to claim 16 when dependent on claim 4 wherein the third undercutter is coupled to the drive source in a manner such that it is oscillated in phase or antiphase with the second undercutter. 50
18. Apparatus according to claim 16 or 17 wherein said first shaving unit is provided between said second and third shaving units, and each of the second and third outer cutters is inactive. 55
19. Apparatus according to any preceding claim wherein all shaving units are positioned in such a manner that the skin-engaging surfaces of said shaving units are coplanar.
20. Apparatus according to any preceding claim wherein the first outer cutter (7) is coupled to the first un-

dercutter (8).

21. Apparatus according to claim 20 wherein the first outer cutter is coupled with its cooperating undercutter by means of a linkage (11, 12; 42, 44, 41). 5
22. Apparatus according to claim 21 wherein said linkage comprises a crank member and an arm for movement of the outer cutter. 10
23. Apparatus according to claim 22 wherein the first outer cutter is mounted on first and second movable carriers (331, 322) each of which is pivotably connected to a chassis of the first shaving unit. 15
24. Apparatus according to claim 23 wherein said arm member is a double arm lever (352), and wherein said first movable carrier (331) is connected to the double arm lever (352) via a first film hinge device (351), said double arm lever (352) is connected to the bell crank (358) via a second film hinge device (353, 354) and said bell crank is connected to a carrier (339) for the undercutter via a third film hinge device (357, 359). 20
25. Apparatus according to claim 24 wherein said second and third film hinge devices include at least one stabilizer (354, 358). 25
26. Apparatus according to any preceding claim wherein the first shaving unit is constructed as a long hair cutter or a trimmer. 30
27. Apparatus according to any preceding claim wherein the first outer cutter has an outer surface adapted for enhanced grip on the skin. 35
28. Apparatus according to any preceding claim wherein the second outer cutter has a low friction outer surface. 40
29. Apparatus according to any preceding claim wherein at least one undercutter is mounted on an undercutter module coupled to said drive source. 45
30. Apparatus according to claim 29 wherein said undercutter module is guided by at least one guide rod. 50
31. Apparatus according to claim 30 wherein said guide rod is mounted on a chassis module (145). 55
32. Apparatus according to claim 31 wherein at least one shaving unit is secured to a frame (146) movably mounted in said chassis module.
33. Apparatus according to claim 32 wherein said at least one shaving unit is floatably mounted for up-

and down movement in said chassis module.

34. Apparatus according to claim 33 wherein the floating shaving unit comprises an inactive outer cutter.

35. Apparatus according to claim 33 wherein the floating shaving unit comprises a driven outer cutter.

36. Apparatus according to any one of claims 31 to 35 wherein said chassis module (145) is mounted on the housing of the dry shaving apparatus.

37. Apparatus according to claim 36 wherein said chassis module is movably mounted on said housing.

38. Apparatus according to any one of claims 31 to 37 wherein a frame assembly (146) is removably mountable on said chassis module.

39. Apparatus according to claim 38 wherein at least one outer cutter of one shaving unit is statically mounted in said frame.

40. Apparatus according to claim 39 wherein the under-cutter of said one shaving unit is mounted on said chassis module.

41. Apparatus according to any preceding claim wherein a gearbox is provided to couple the drive source to each shaving unit.

42. Apparatus according to claim 41 further comprising: a first drive shaft coupled to the drive source; the first drive shaft carrying a first gear means and a first eccentric camming element; a second drive shaft carrying a second gear means and a second eccentric camming element; the second gear means being in mesh with the first gear means; and the first and second camming elements being arranged to engage first and second follower means coupled to respective shaving units.

43. Apparatus according to claim 42 further comprising a third drive shaft carrying a third gear means and a third eccentric camming element, the third gear means being in mesh with one of the first and second gear means, and the third camming element engaging a third follower means coupled to one of the shaving units.

44. Apparatus according to claim 43 when dependent on claim 10 wherein the third follower means is coupled to the third shaving unit.

45. A method of shaving in which the skin is agitated at one location in an oscillatory manner and is caused to move at an adjacent location where it is shaved by a moving cutter.

45. A method according to claim 45 in which the cutter oscillates at a frequency which differs from that of the skin agitation.

Patentansprüche

1. Trockenrasierapparat, der folgendes umfaßt:

ein erstes einzelnes Schersystem (141; 222) mit mindestens zwei miteinander in Wirkverbindung stehenden ersten Messern (7, 6), die aus einem ersten Obermesser (7) und einem ersten Untermesser (6) bestehen; mindestens ein zweites einzelnes Schersystem (112, 113; 261, 203) mit mindestens zwei miteinander in Wirkverbindung stehenden zweiten Messern, die aus einem zweiten Obermesser (1462, 1463; 2251, 2252) und einem zweiten Untermesser (181, 251) bestehen; Vorgespannmittel für das Zusammenwirken dieser Messer; und mindestens eine mit mindestens einem Messer des jeweiligen einzelnen Schersystems gekoppelte Antriebsquelle (260),

dadurch gekennzeichnet,

daß alle Messer von mindestens dem ersten der einzelnen Schersysteme so mit der Antriebsquelle gekoppelt sind, daß sie schneidend und Hautvibrationen bewirkend angetrieben werden; und daß das Obermesser von mindestens einem weiteren der einzelnen Schersysteme inaktiv ist.

2. Trockenrasierapparat, der folgendes umfaßt:

ein erstes Schersystem (141; 222) mit einem ersten Obermesser (7) und einem damit in Wirkverbindung stehenden ersten Untermesser (6); ein zweites Schersystem (112, 113; 261, 203) mit einem zweiten Obermesser (1462, 1463; 2251, 2252) und einem damit in Wirkverbindung stehenden zweiten Untermesser (181; 251); und eine in einem Gehäuse gelagerte und mit mindestens einem Messer des jeweiligen Schersystems gekoppelte Antriebsquelle (260);

dadurch gekennzeichnet,

daß das erste Obermesser (7) mit der Antriebsquelle (260) gekoppelt und in Abhängigkeit davon oszillierend bewegbar ist, um als Hautvibrationsteil zu dienen; und daß das zweite Obermesser inaktiv ist.

3. Apparat nach Anspruch 1 oder 2, wobei über die Hälfte der Messer mit der Antriebsquelle gekoppelt ist.
4. Apparat nach einem der Ansprüche 1 bis 3, wobei das zweite Untermesser oszillierend bewegbar angetrieben wird.
5. Apparat nach Anspruch 4, wobei das erste Untermesser so gekoppelt ist, daß es phasengleich zum zweiten Untermesser in Oszillation versetzt wird.
6. Apparat nach Anspruch 4 oder 5, wobei das erste Obermesser mit der Antriebsquelle so gekoppelt ist, daß es mit einer anderen Frequenz als der des zweiten Untermessers angetrieben wird.
7. Apparat nach Anspruch 6, wobei das Frequenzverhältnis zwischen der Frequenz des zweiten Untermessers und des ersten Obermessers im Bereich 0,5 zu 2 liegt.
8. Apparat nach Anspruch 7, wobei das erste Obermesser mit einer niedrigeren Frequenz als das zweite Untermesser angetrieben wird.
9. Apparat nach Anspruch 4 oder 5, wobei das erste Obermesser mit der Antriebsquelle so gekoppelt ist, daß es dem zweiten Untermesser um einen Phasenwinkel im Bereich von 0° bis 135° vor- oder nachhinkt.
10. Apparat nach Anspruch 9, wobei der Phasenwinkel im Bereich von 0° bis 90° liegt.
11. Apparat nach Anspruch 10, wobei der Phasenwinkel im wesentlichen 0° für kurze Haare beträgt.
12. Apparat nach Anspruch 10, wobei der Phasenwinkel im wesentlichen um 90° für längere Haare nachhinkt.
13. Apparat nach einem der Ansprüche 4 bis 12, wobei das erste Obermesser (7) vom ersten Untermesser entkoppelt ist.
14. Apparat nach einem der Ansprüche 1 bis 13, wobei das erste Obermesser linear hin- und herbewegbar gelagert ist.
15. Apparat nach einem der Ansprüche 1 bis 13, wobei das erste Obermesser drehend hin- und herbewegbar gelagert ist.
16. Apparat nach einem der vorhergehenden Ansprüche, der weiterhin ein drittes Schersystem (113; 203) umfaßt, mit einem dritten Obermesser (143; 2252) und einem mit der Antriebsquelle (260) gekoppelten und gegenüber dem dritten Obermesser bewegbar gelagerten dritten Untermesser (181; 251).
17. Apparat nach Anspruch 16, unter Rückbeziehung auf Anspruch 4, wobei das dritte Untermesser mit der Antriebsquelle so gekoppelt ist, daß es phasengleich oder gegenphasig zum zweiten Untermesser in Oszillation versetzt wird.
18. Apparat nach Anspruch 16 oder 17, wobei das erste Schersystem zwischen dem zweiten und dritten Schersystem vorgesehen ist und das zweite und dritte Obermesser inaktiv sind.
19. Apparat nach einem der vorhergehenden Ansprüche, wobei alle Schersysteme so positioniert sind, daß ihre Hautanlageflächen in einer gemeinsamen Ebene liegen.
20. Apparat nach einem der vorhergehenden Ansprüche, wobei das erste Obermesser (7) mit dem ersten Untermesser (6) gekoppelt ist.
21. Apparat nach Anspruch 20, wobei das erste Obermesser über ein Gelenk (11, 12; 42, 44, 41) mit seinem mit ihm zusammenwirkenden Untermesser gekoppelt ist.
22. Apparat nach Anspruch 21, wobei das Gelenk einen Winkelhebel und ein Armglied zur Bewegung des Obermessers aufweist.
23. Apparat nach Anspruch 22, wobei das erste Obermesser auf ersten und zweiten bewegbaren Trägern (331, 322) befestigt ist, die mit einem Chassis des ersten Schersystems schwenkbar verbunden sind.
24. Apparat nach Anspruch 23, wobei das Armglied ein doppelarmiger Hebel (352) ist und der erste bewegbare Träger (331) mit dem doppelarmigen Hebel (352) über ein erstes Filmscharnier (351) verbunden ist, der doppelarmige Hebel (352) mit dem Winkelhebel (356) über ein zweites Filmscharnier (353, 354) verbunden ist und der Winkelhebel über ein drittes Filmscharnier (357, 358) mit einem Träger (333) für das Untermesser verbunden ist.
25. Apparat nach Anspruch 24, wobei die zweiten und dritten Filmscharniere mindestens einen Stabilisator (354, 358) aufweisen.
26. Apparat nach einem der vorhergehenden Ansprüche, wobei das erste Schersystem als Langhaarschneider oder Trimmer ausgebildet ist.
27. Apparat nach einem der vorhergehenden Ansprüche

che, wobei das erste Obermesser eine Außenfläche aufweist, die für verbesserten Eingriff mit der Haut ausgestaltet ist.

28. Apparat nach einem der vorhergehenden Ansprüche, wobei das zweite Obermesser eine Außenfläche mit niedrigem Reibwert aufweist. 5
29. Apparat nach einem der vorhergehenden Ansprüche, wobei mindestens ein Untermesser auf einem mit der Antriebsquelle gekoppelten Untermessermodul gelagert ist. 10
30. Apparat nach Anspruch 29, wobei das Untermessermodul von mindestens einer Führungsstange geführt ist. 15
31. Apparat nach Anspruch 30, wobei die Führungsstange auf einem Chassismodul (145) gelagert ist. 20
32. Apparat nach Anspruch 31, wobei mindestens ein Schersystem an einem im Chassismodul bewegbar gelagerten Rahmen (146) befestigt ist.
33. Apparat nach Anspruch 32, wobei das mindestens eine Schersystem im Chassismodul schwimmend auf- und abbewegbar gelagert ist. 25
34. Apparat nach Anspruch 33, wobei das schwimmende Schersystem ein inaktives Obermesser umfaßt. 30
35. Apparat nach Anspruch 32, wobei das schwimmende Schersystem ein angetriebenes Obermesser umfaßt. 35
36. Apparat nach einem der Ansprüche 31 bis 35, wobei das Chassismodul (145) auf dem Gehäuse des Trockenrasierapparats angeordnet ist.
37. Apparat nach Anspruch 36, wobei das Chassismodul auf dem Gehäuse bewegbar gelagert ist. 40
38. Apparat nach einem der Ansprüche 31 bis 37, wobei eine Rahmenbaugruppe (146) auf dem Chassismodul abnehmbar anordenbar ist. 45
39. Apparat nach Anspruch 38, wobei mindestens ein Obermesser eines Schersystems in diesem Rahmen feststehend angeordnet ist. 50
40. Apparat nach Anspruch 39, wobei das Untermesser dieses einen Schersystems auf dem Chassismodul angeordnet ist.
41. Apparat nach einem der vorhergehenden Ansprüche, wobei eine Getriebeanordnung vorgesehen ist, um die Antriebsquelle mit den jeweiligen Schersystemen zu koppeln. 55

42. Apparat nach Anspruch 41, der weiterhin umfaßt:

eine mit der Antriebsquelle gekoppelte erste Antriebswelle, wobei auf der ersten Antriebswelle ein erstes Zahnrad und ein erstes exzentrisches Nockenelement angeordnet sind; eine zweite Antriebswelle, auf der ein zweites Zahnrad und ein zweites exzentrisches Nockenelement angeordnet sind, wobei das zweite Zahnrad mit dem ersten Zahnrad kämmt, und wobei sich die ersten und zweiten Nockenelemente mit ersten und zweiten Mitnehmern in Eingriff befinden, die mit den jeweiligen Schersystemen gekoppelt sind.

43. Apparat nach Anspruch 42, der weiterhin umfaßt: eine dritte Antriebswelle, auf der ein drittes Zahnrad und ein drittes exzentrisches Nockenelement angeordnet sind, wobei das dritte Zahnrad mit einem der ersten und zweiten Zahnräder kämmt und das dritte Nockenelement sich mit einem dritten Mitnehmer in Eingriff befindet, der mit einem der Schersysteme gekoppelt ist.

44. Apparat nach Anspruch 43, unter Rückbeziehung auf Anspruch 10, wobei der dritte Mitnehmer mit dem dritten Schersystem gekoppelt ist.

45. Rasiervorgang, bei dem die Haut an einer Stelle in Vibrationen versetzt und an einer benachbarten Stelle bewegt wird, wo sie dann von einem sich bewegenden Messer rasiert wird.

46. Verfahren nach Anspruch 45, wobei das Messer mit einer Frequenz oszilliert, die sich von der Frequenz, mit der die Haut in Vibrationen versetzt wird, unterscheidet.

Revendications

1. Appareil de rasage à sec comportant :

une première unité de rasage individuelle (141; 222) ayant au moins deux premiers couteaux (7, 6) qui coopèrent, comprenant un premier couteau extérieur (7) et un premier couteau inférieur (6);

au moins une deuxième unité de rasage individuelle (112, 113; 261, 203) ayant au moins deux deuxième couteaux qui coopèrent comprenant un deuxième couteau extérieur (1462, 1463; 2251, 2252) et un deuxième couteau inférieur (181, 251);

des moyens de rappel pour la coopération desdits couteaux; et

au moins une source d'entraînement (280) reliée à au moins un couteau de chaque unité de

rasage individuelle,

caractérisé en ce que :

tous les couteaux d'au moins la première desdites unités de rasage individuelles sont reliés à ladite source d'entraînement de façon à être entraînés à des fins de coupe et d'agitation de peau; et le couteau extérieur d'au moins une autre desdites unités de rasage individuelles est inactif.

2. Appareil de rasage à sec comportant :

une première unité de rasage (141; 222) comportant un premier couteau extérieur (7) et un premier couteau inférieur (6) qui coopèrent; une deuxième unité de rasage (112, 113; 261, 203) ayant un deuxième couteau extérieur (1462, 1463; 2251, 2252) et un deuxième couteau inférieur (181; 251) qui coopèrent; et une source d'entraînement (260) montée dans un boîtier et reliée à au moins un couteau de chaque unité de rasage;

caractérisé en ce que :

le premier couteau extérieur (7) est relié à la source d'entraînement (260) et est monté pour un mouvement oscillant en réponse à cela afin de servir d'élément d'agitation de la peau; et le deuxième couteau extérieur est inactif.

3. Appareil selon la revendication 1 ou 2, dans lequel plus de la moitié des couteaux sont reliés à la source d'entraînement.
4. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel le deuxième couteau inférieur est prévu pour être entraîné avec un mouvement oscillant.
5. Appareil selon la revendication 4, dans lequel le premier couteau inférieur est relié afin d'être amené à osciller en phase avec le deuxième couteau inférieur.
5. Appareil selon la revendication 4 ou 5, dans lequel le premier couteau extérieur est relié à la source d'entraînement de manière à être entraîné à une fréquence qui diffère de celle dudit deuxième couteau inférieur.
7. Appareil selon la revendication 6, dans lequel le rapport de fréquence entre le deuxième couteau inférieur et le premier couteau extérieur est dans la plage de 0,5 à 2.
8. Appareil selon la revendication 7, dans lequel le

premier couteau extérieur est prévu pour être entraîné à une fréquence plus faible que ledit deuxième couteau inférieur.

- 5 9. Appareil selon la revendication 4 ou 5, dans lequel le premier couteau extérieur est relié à la source d'entraînement d'une manière telle qu'il est en avance ou en retard par rapport au deuxième couteau inférieur d'un angle de phase dans la plage de 0° à 135°.
- 10 10. Appareil selon la revendication 9, dans lequel l'angle de phase est dans la plage de 0° à 90°.
- 15 11. Appareil selon la revendication 10, dans lequel l'angle de phase est sensiblement de 0° pour les poils courts.
- 20 12. Appareil selon la revendication 10, dans lequel l'angle de phase est sensiblement de 90° de retard pour les poils longs.
- 25 13. Appareil selon l'une quelconque des revendications 4 à 12, dans lequel le premier couteau extérieur (7) est découplé du premier couteau inférieur.
- 30 14. Appareil selon l'une quelconque des revendications 1 à 13, dans lequel le premier couteau extérieur est monté pour un mouvement alternatif linéaire.
- 35 15. Appareil selon l'une quelconque des revendications 1 à 13, dans lequel le premier couteau extérieur est monté pour un mouvement alternatif rotatif.
- 40 16. Appareil selon l'une quelconque des revendications précédentes, comportant en outre une troisième unité de rasage (113; 203), ayant un troisième couteau extérieur (1463; 2252) et un troisième couteau inférieur (181; 251) relié à la source d'entraînement (260) et monté pour un mouvement par rapport au troisième couteau extérieur.
- 45 17. Appareil selon la revendication 16 lorsqu'elle est rattachée à la revendication 4, dans lequel le troisième couteau inférieur est relié à la source d'entraînement d'une manière telle qu'il est amené à osciller en phase ou en opposition de phase avec le deuxième couteau inférieur.
- 50 18. Appareil selon la revendication 16 ou 17, dans lequel ladite première unité de rasage est prévue entre les deuxième et troisième unités de rasage, et chacun des deuxième et troisième couteaux extérieurs est inactif.
- 55 19. Appareil selon l'une quelconque des revendications précédentes, dans lequel toutes les unités de rasage sont positionnées de manière telle que les

- surfaces d'engagement de peau desdites unités de rasage sont coplanaires.
20. Appareil selon l'une quelconque des revendications précédentes, dans lequel le premier couteau extérieur (7) est relié au premier couteau inférieur (6).
21. Appareil selon la revendication 20, dans lequel le premier couteau extérieur est relié à son couteau inférieur qui coopère au moyen d'un mécanisme (11, 12; 12, 44, 41).
22. Appareil selon la revendication 21, dans lequel ledit mécanisme comporte un élément de manivelle et un bras pour déplacement du couteau extérieur.
23. Appareil selon la revendication 22, dans lequel le premier couteau extérieur est monté sur des premier et deuxième supports mobiles (331, 322) dont chacun d'eux est relié de façon pivotante à un châssis de la première unité de rasage.
24. Appareil selon la revendication 23, dans lequel ledit élément de bras est un levier à double bras (352), et dans lequel ledit premier support mobile (331) est relié au levier à double bras (352) par l'intermédiaire d'un premier dispositif de charnière à film (351), ledit levier à double bras (352) est relié à la manivelle (356) par l'intermédiaire d'un deuxième dispositif de charnière à film (353, 354) et ladite manivelle est reliée à un support (322) pour le couteau inférieur par l'intermédiaire d'un troisième dispositif de charnière à film (357, 359).
25. Appareil selon la revendication 24, dans lequel lesdits deuxième et troisième dispositifs de charnière à film comprennent au moins un stabilisateur (354, 358).
26. Appareil selon l'une quelconque des revendications précédentes, dans lequel la première unité de rasage est construite sous la forme d'un couteau à poil long ou d'une tondeuse.
27. Appareil selon l'une quelconque des revendications précédentes, dans lequel le premier couteau extérieur a une surface extérieure prévue pour un accrochage amélioré sur la peau.
28. Appareil selon l'une quelconque des revendications précédentes, dans lequel le deuxième couteau extérieur a une surface extérieure à faible friction.
29. Appareil selon l'une quelconque des revendications précédentes, dans lequel au moins un couteau inférieur est monté sur un module de couteau inférieur relié à ladite source d'entraînement.
30. Appareil selon la revendication 29, dans lequel ledit module de couteau inférieur est guidé par au moins une tige de guidage.
31. Appareil selon la revendication 30, dans lequel ladite tige de guidage est montée sur un module de châssis (145).
32. Appareil selon la revendication 31, dans lequel au moins une unité de rasage est fixée sur un cadre (146) monté de façon mobile dans ledit module de châssis.
33. Appareil selon la revendication 32, dans lequel ladite au moins une unité de rasage est montée de manière flottante pour un mouvement vers le haut et vers le bas dans ledit module de châssis.
34. Appareil selon la revendication 33, dans lequel l'unité de rasage flottante comporte un couteau extérieur incliné.
35. Appareil selon la revendication 33, dans lequel l'unité de rasage flottante comporte un couteau extérieur entraîné.
36. Appareil selon l'une quelconque des revendications 31 à 35, dans lequel ledit module de châssis (145) est monté sur le boîtier de l'appareil de rasage à soc.
37. Appareil selon la revendication 36, dans lequel ledit module de châssis est monté de façon mobile sur ledit boîtier.
38. Appareil selon l'une quelconque des revendications 31 à 37, dans lequel un ensemble de cadre (146) peut être monté de manière amovible sur ledit module de châssis.
39. Appareil selon la revendication 39, dans lequel au moins un couteau extérieur d'une unité de rasage est monté de manière statique dans ledit cadre.
40. Appareil selon la revendication 39, dans lequel le couteau inférieur de ladite unité de rasage est monté sur ledit module de châssis.
41. Appareil selon l'une quelconque des revendications précédentes, dans lequel une transmission est prévue afin de relier la source d'entraînement à chaque unité de rasage.
42. Appareil selon la revendication 41, comportant en outre :
un premier arbre d'entraînement relié à la source d'entraînement; le premier arbre d'entraînement portant des premiers moyens de pignon et un

premier élément de came excentrique; un deuxième arbre d'entraînement portant des deuxième moyens de pignon et un deuxième élément de came excentrique; les deuxième moyens de pignon étant en prise avec les premiers moyens de pignon; et les premier et deuxième éléments de came étant prévus pour engager des premier et deuxième moyens de suiveur reliés à des unités de rasage respectives.

10

43. Appareil selon la revendication 12, comportant en outre un troisième arbre d'entraînement portant des troisièmes moyens de pignon et un troisième élément de came excentrique, les troisièmes moyens de pignon étant en prise avec l'un des premier et deuxième moyens de pignon, et le troisième élément de came engageant des troisièmes moyens de suiveur reliés à une des unités de rasage.

15

44. Appareil selon la revendication 43, lorsqu'elle est rattachée à la revendication 10, dans lequel les troisièmes moyens de suiveur sont reliés à la troisième unité de rasage.

20

45. Procédé de rasage dans lequel la peau est agitée en un emplacement d'une manière oscillante et est amenée à se déplacer en un emplacement adjacent où elle est rasée par un couteau mobile.

25

46. Procédé selon la revendication 45, dans lequel le couteau oscille à une fréquence qui diffère de celle de l'agitation de peau.

30

35

40

45

50

55

FIG. 1

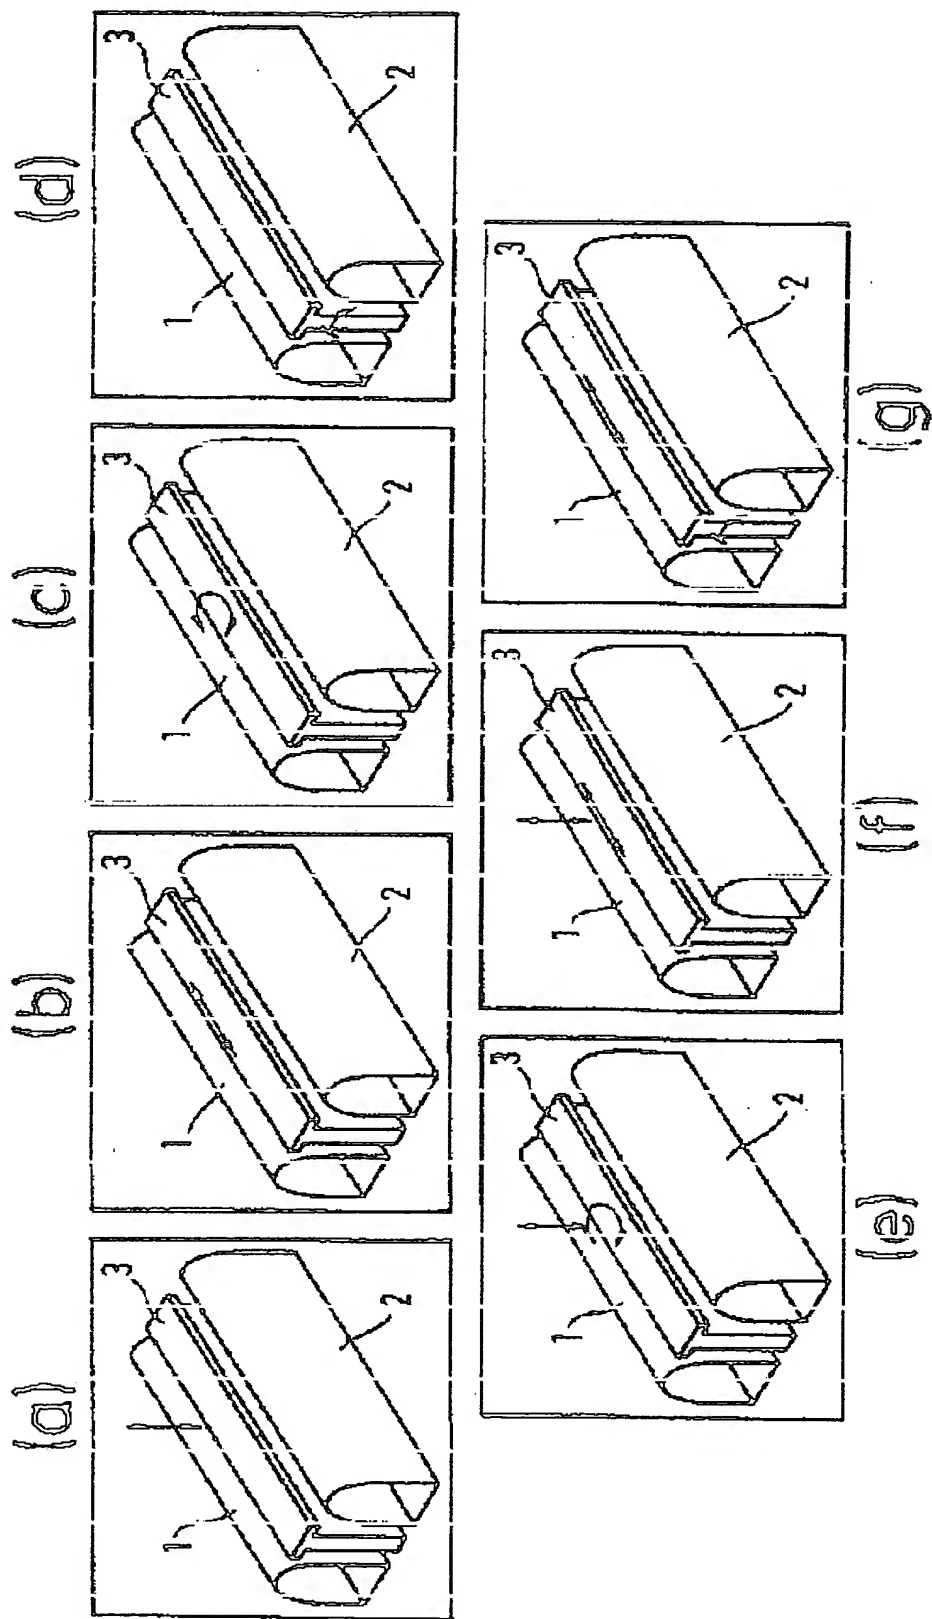
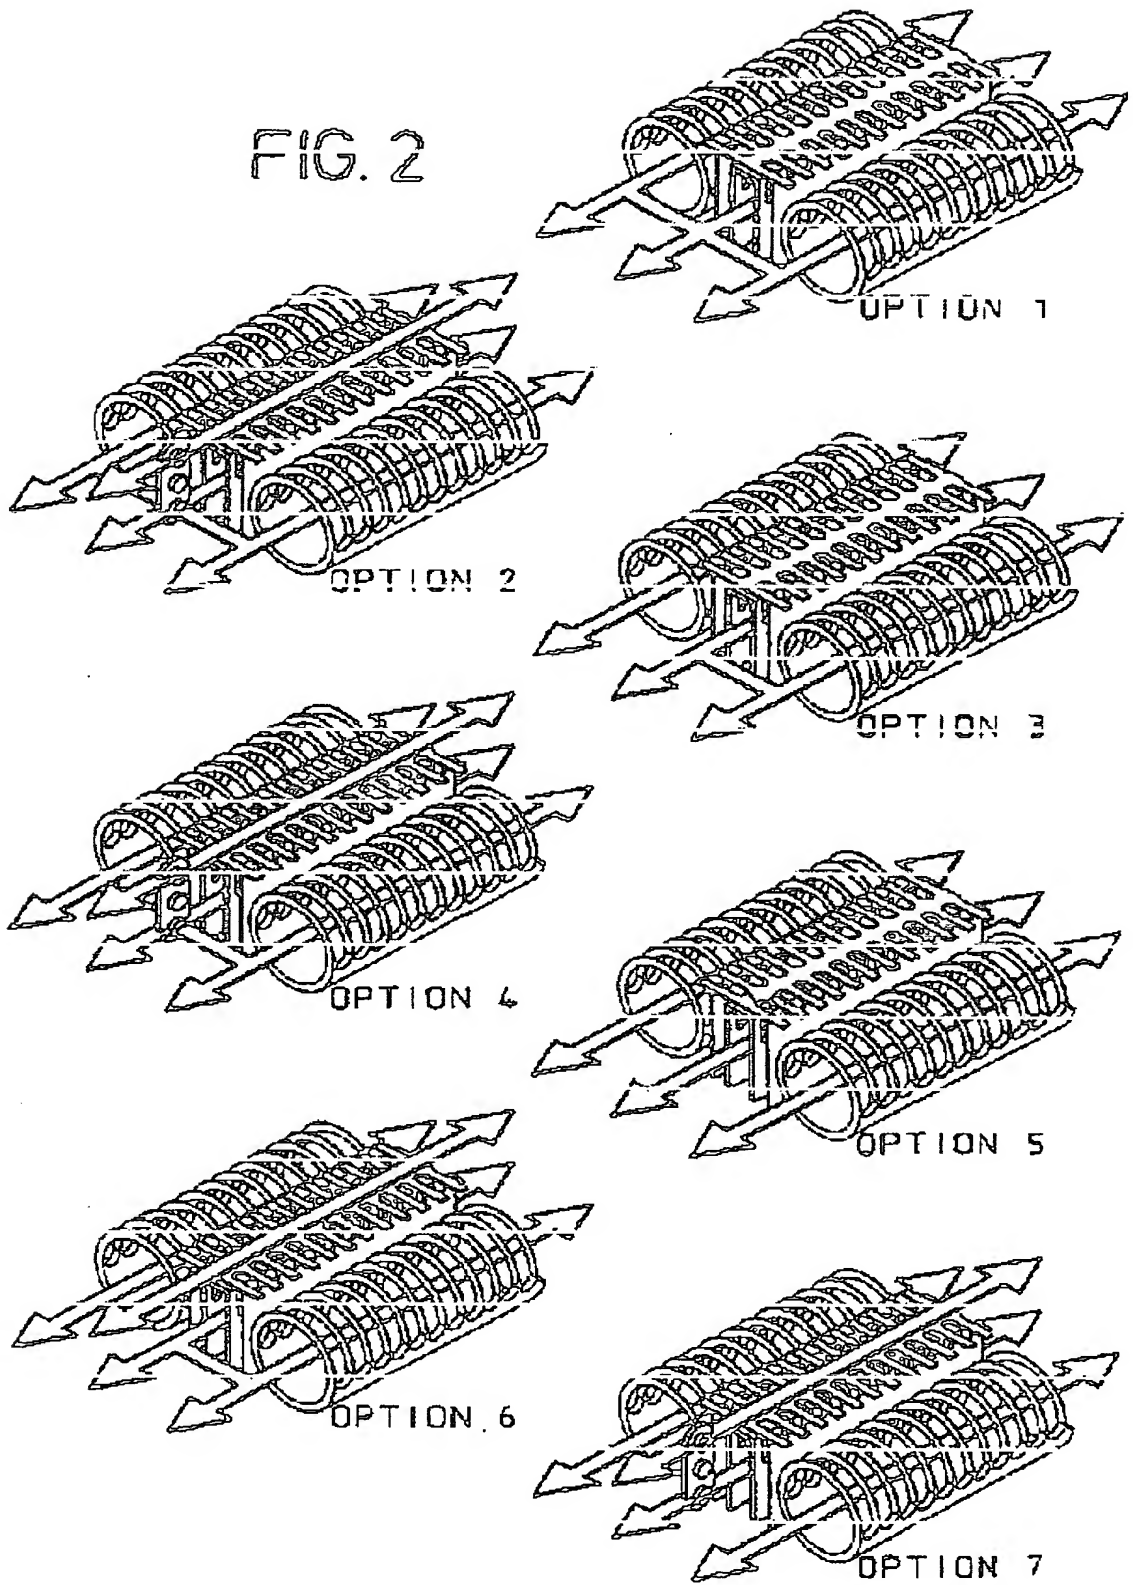


FIG. 2



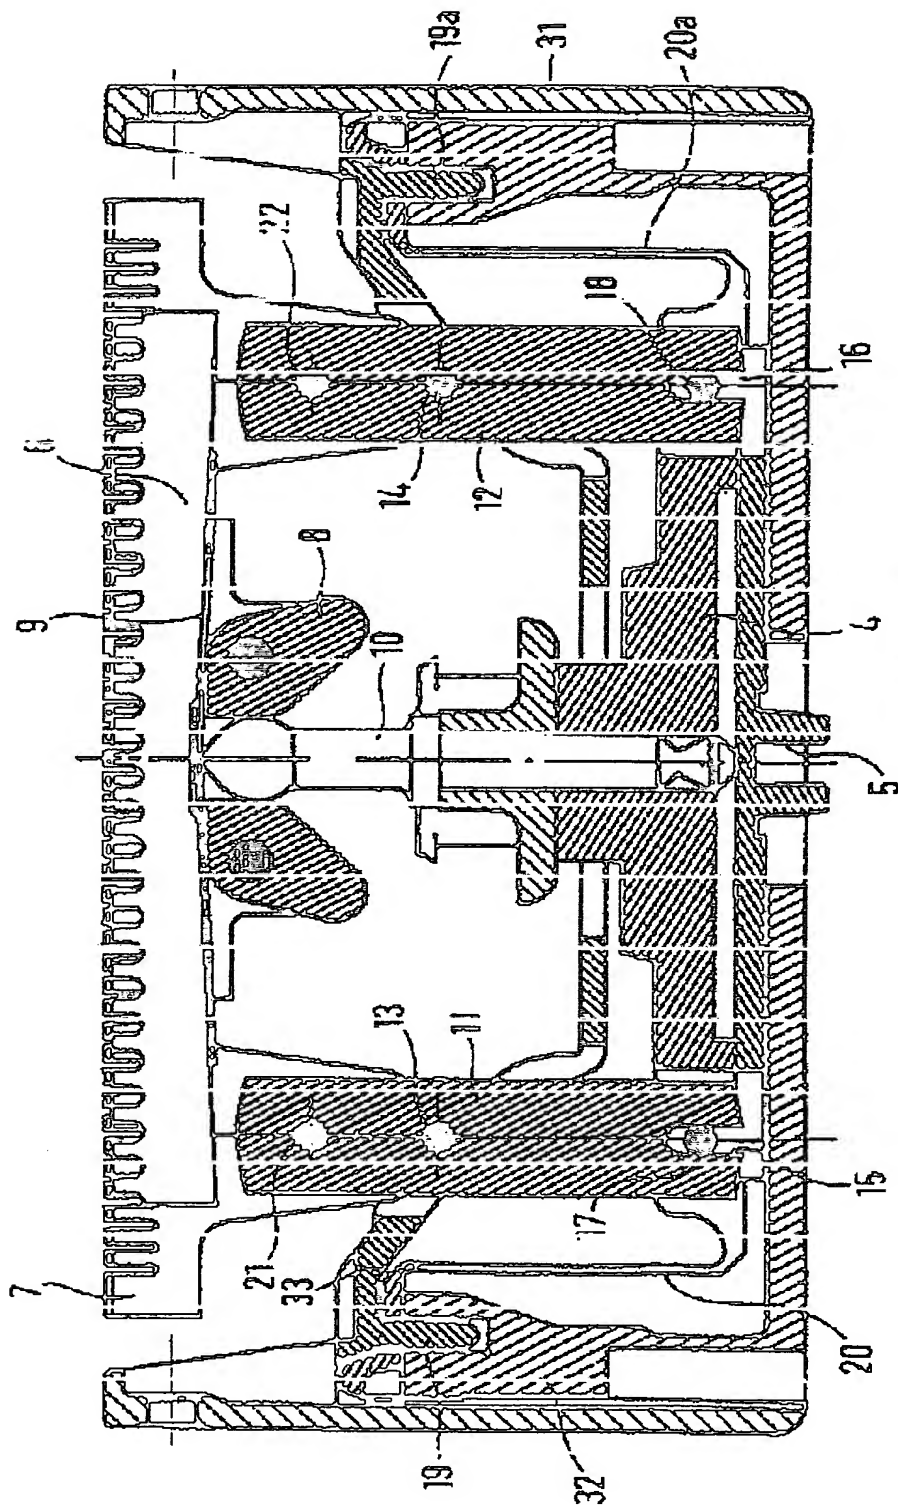
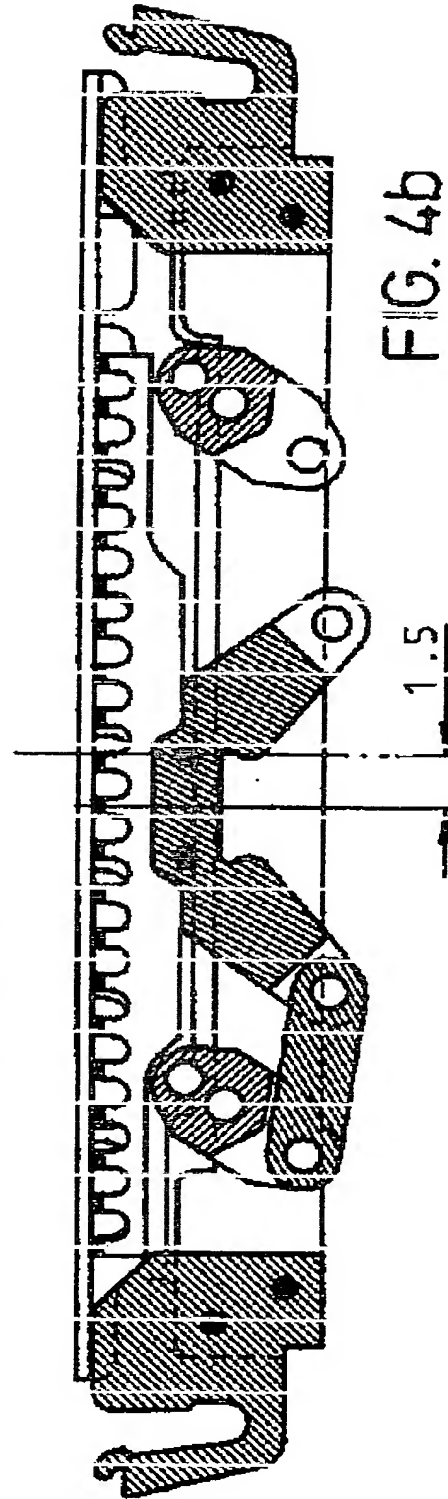
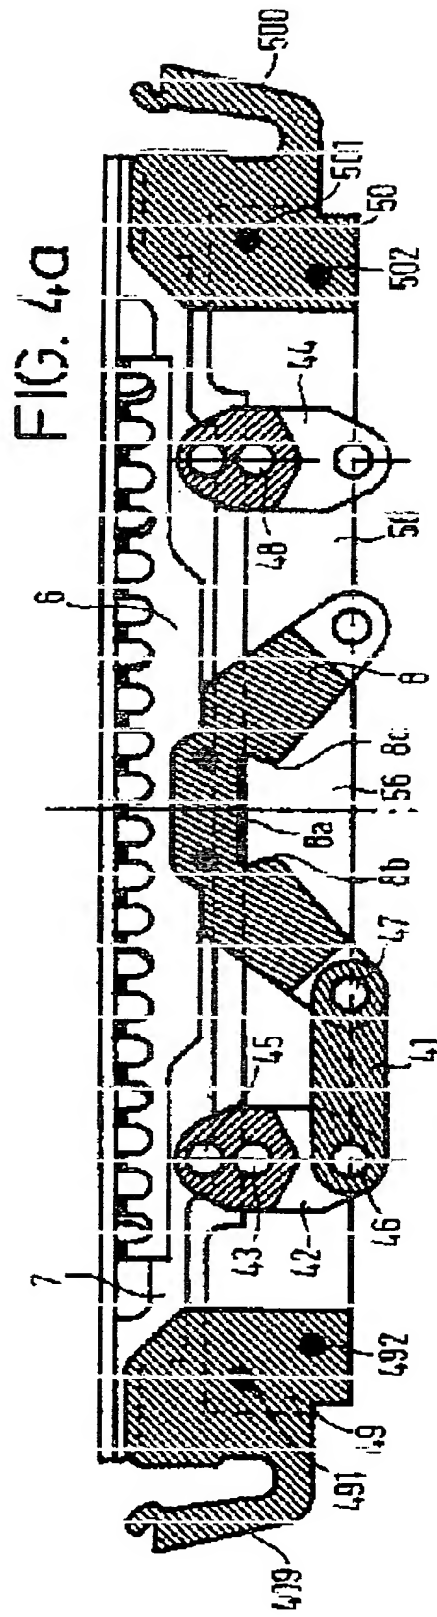


FIG. 3




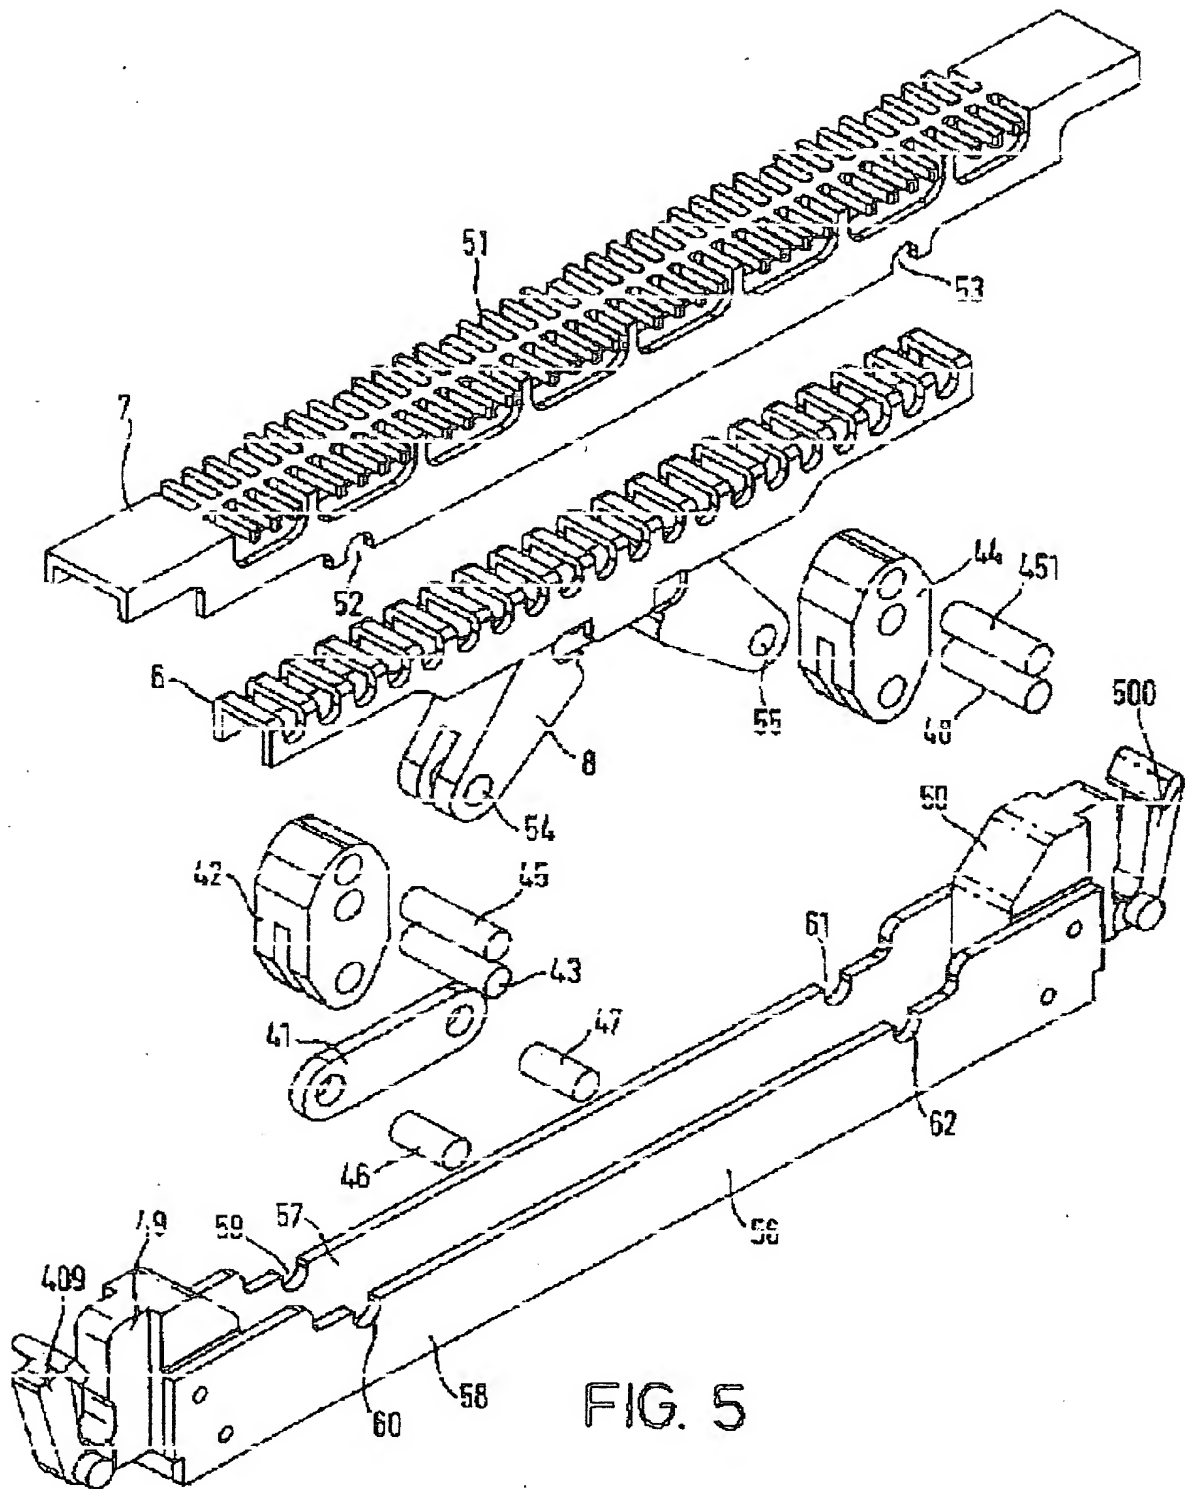


FIG. 5

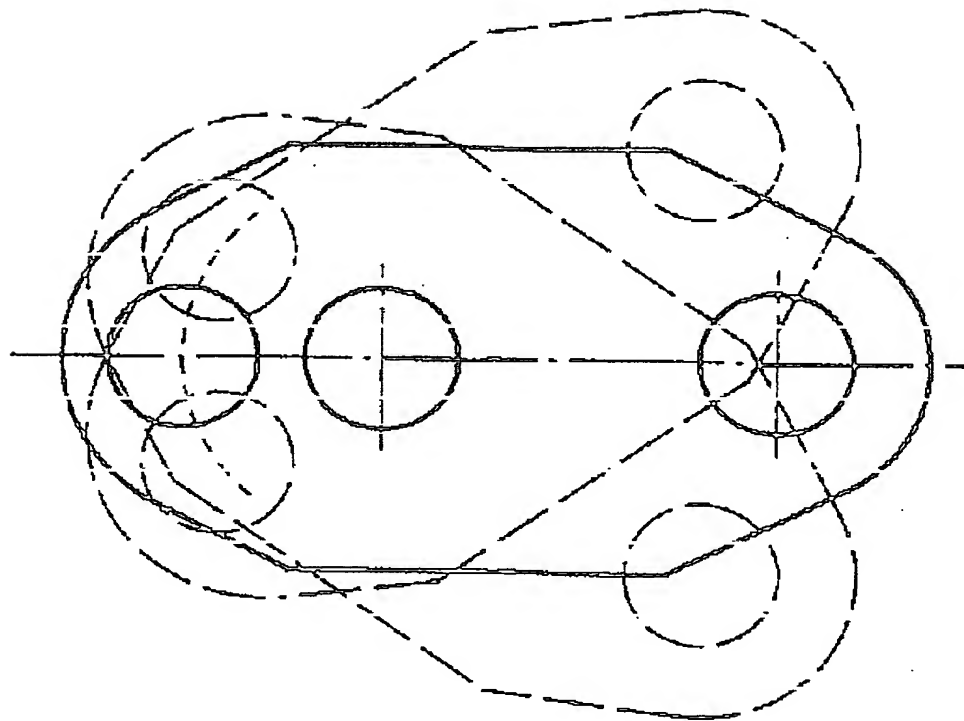

CUTTER TRAVEL (mm)	VERTICAL TRAVEL (mm)
2.60	0.17
3.00	0.24
3.60	0.36

FIG. 6

FIG. 7a

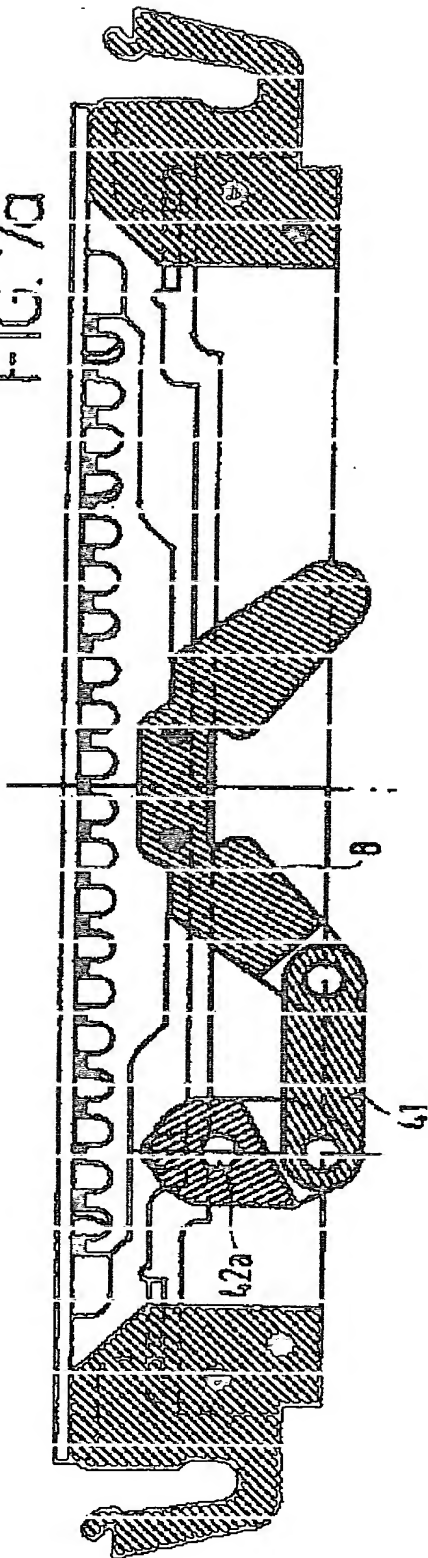
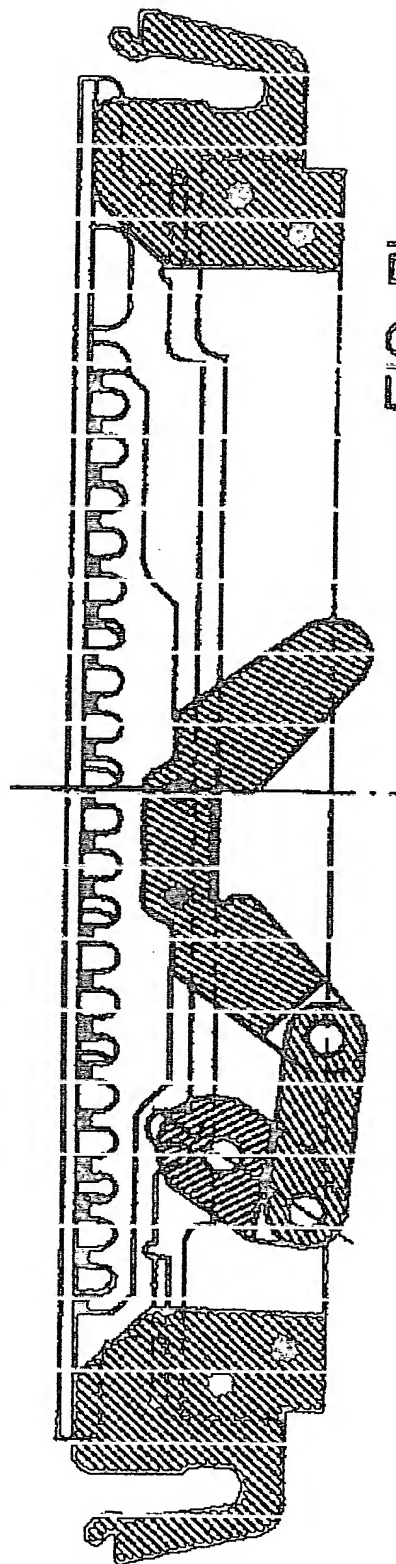


FIG. 7b



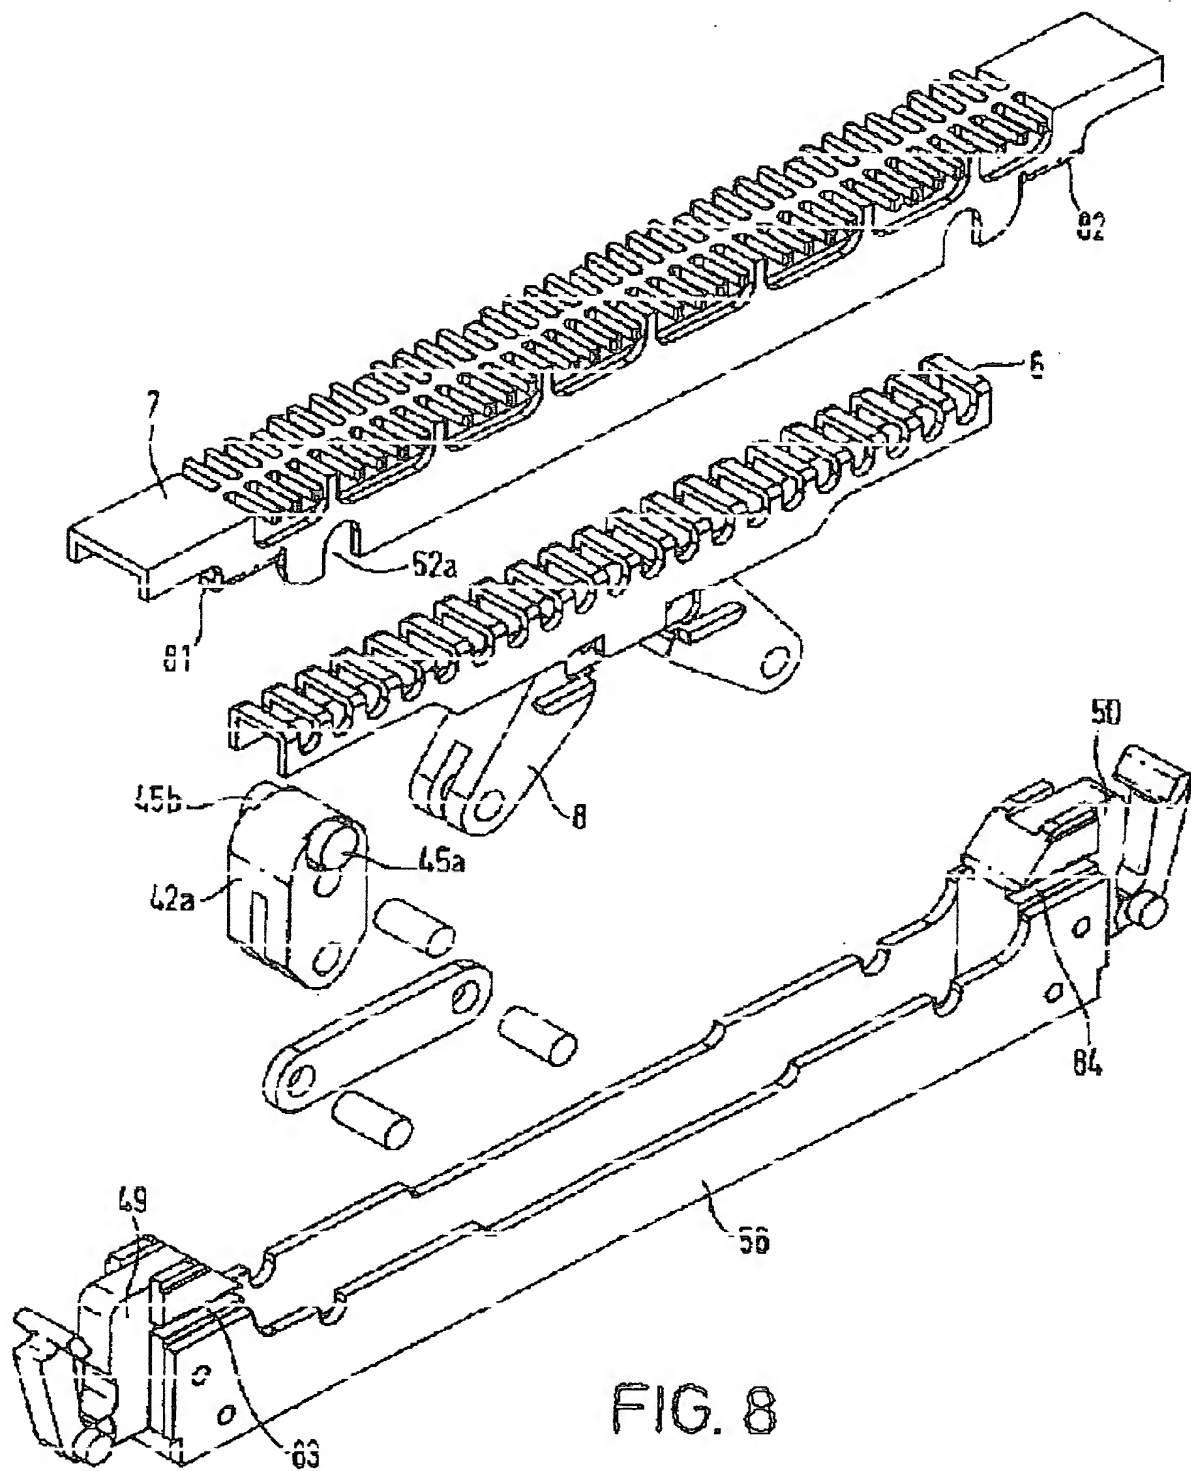


FIG. 8

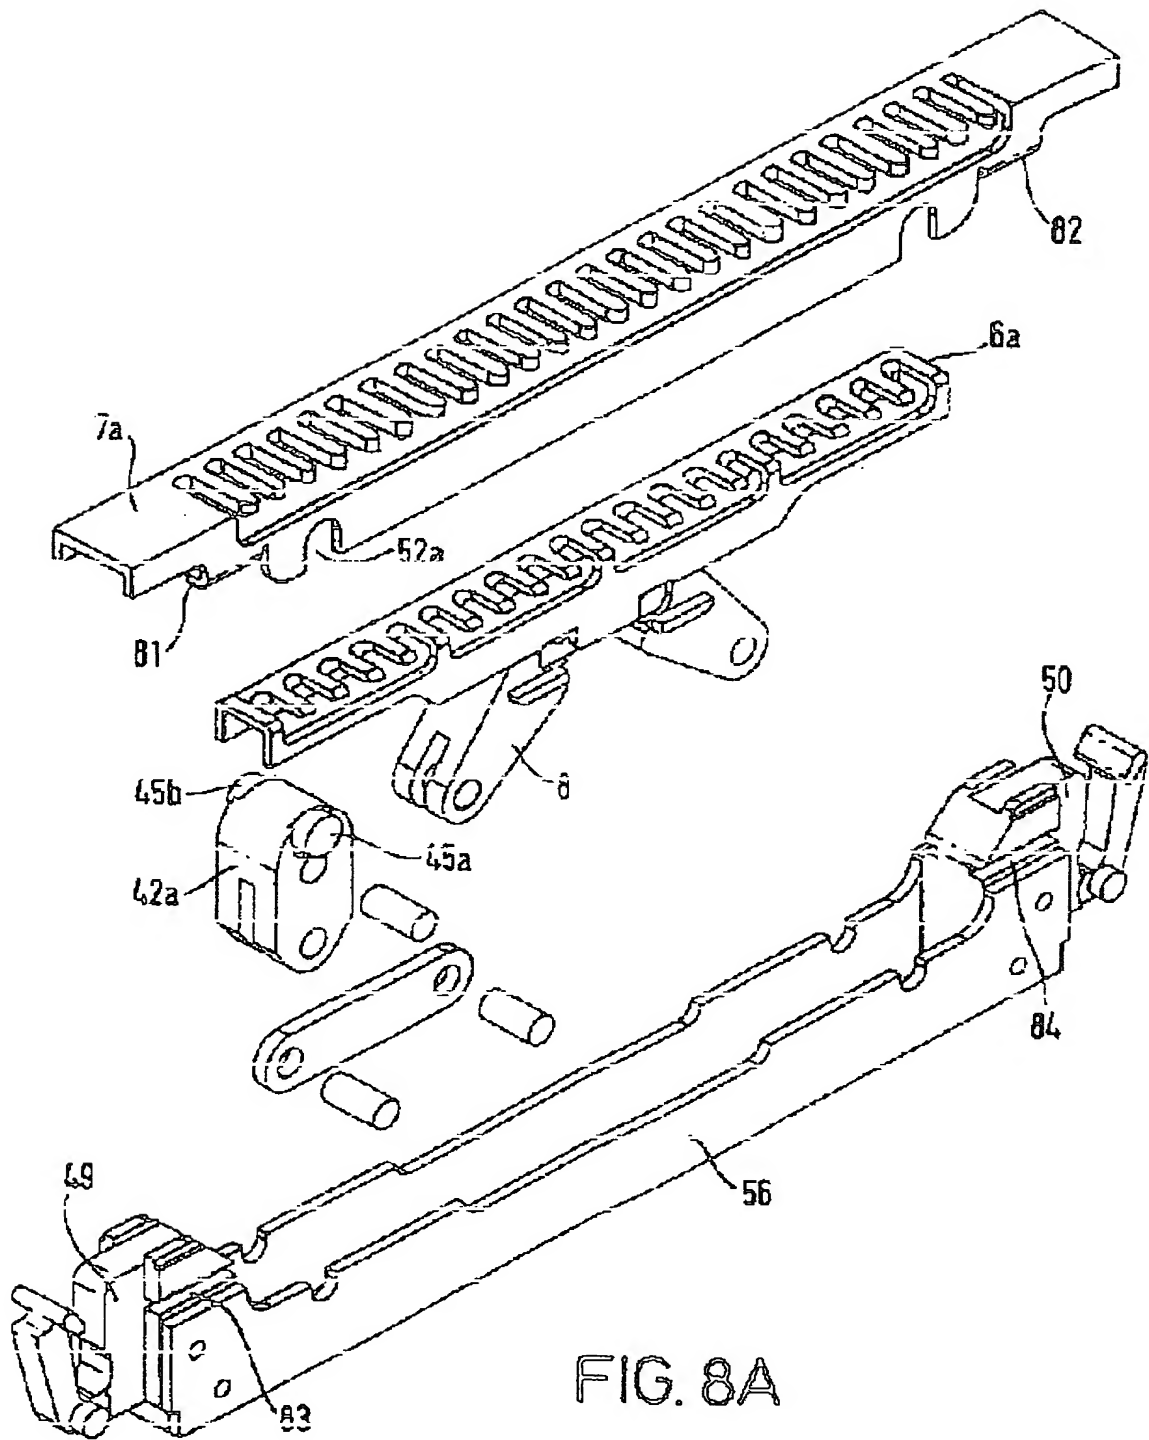


FIG. 8A

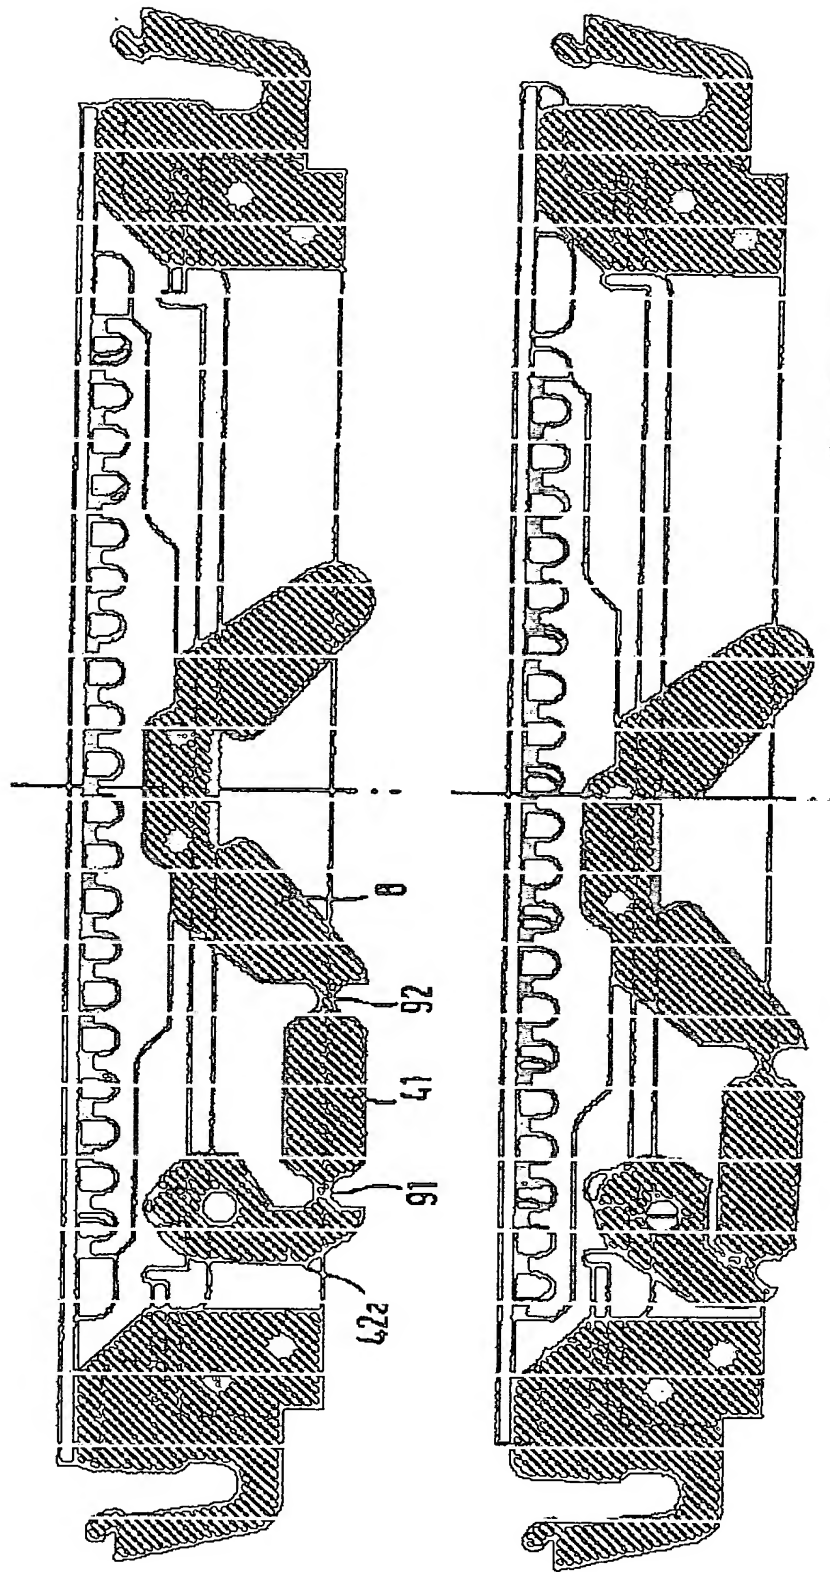


FIG. 9

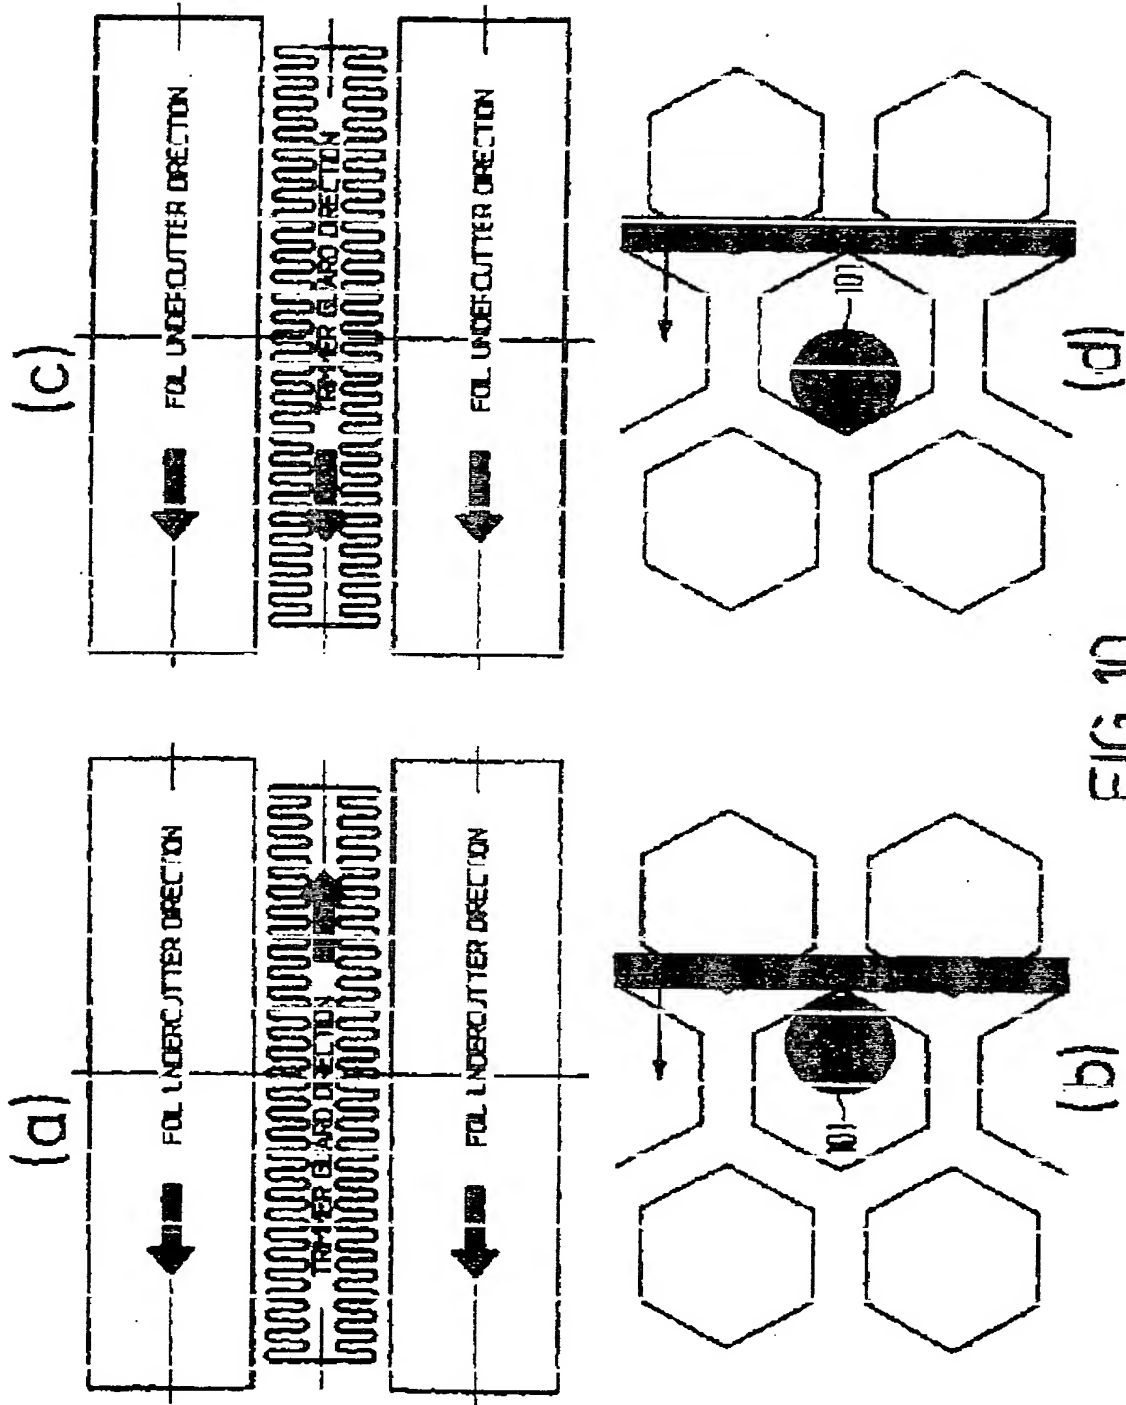
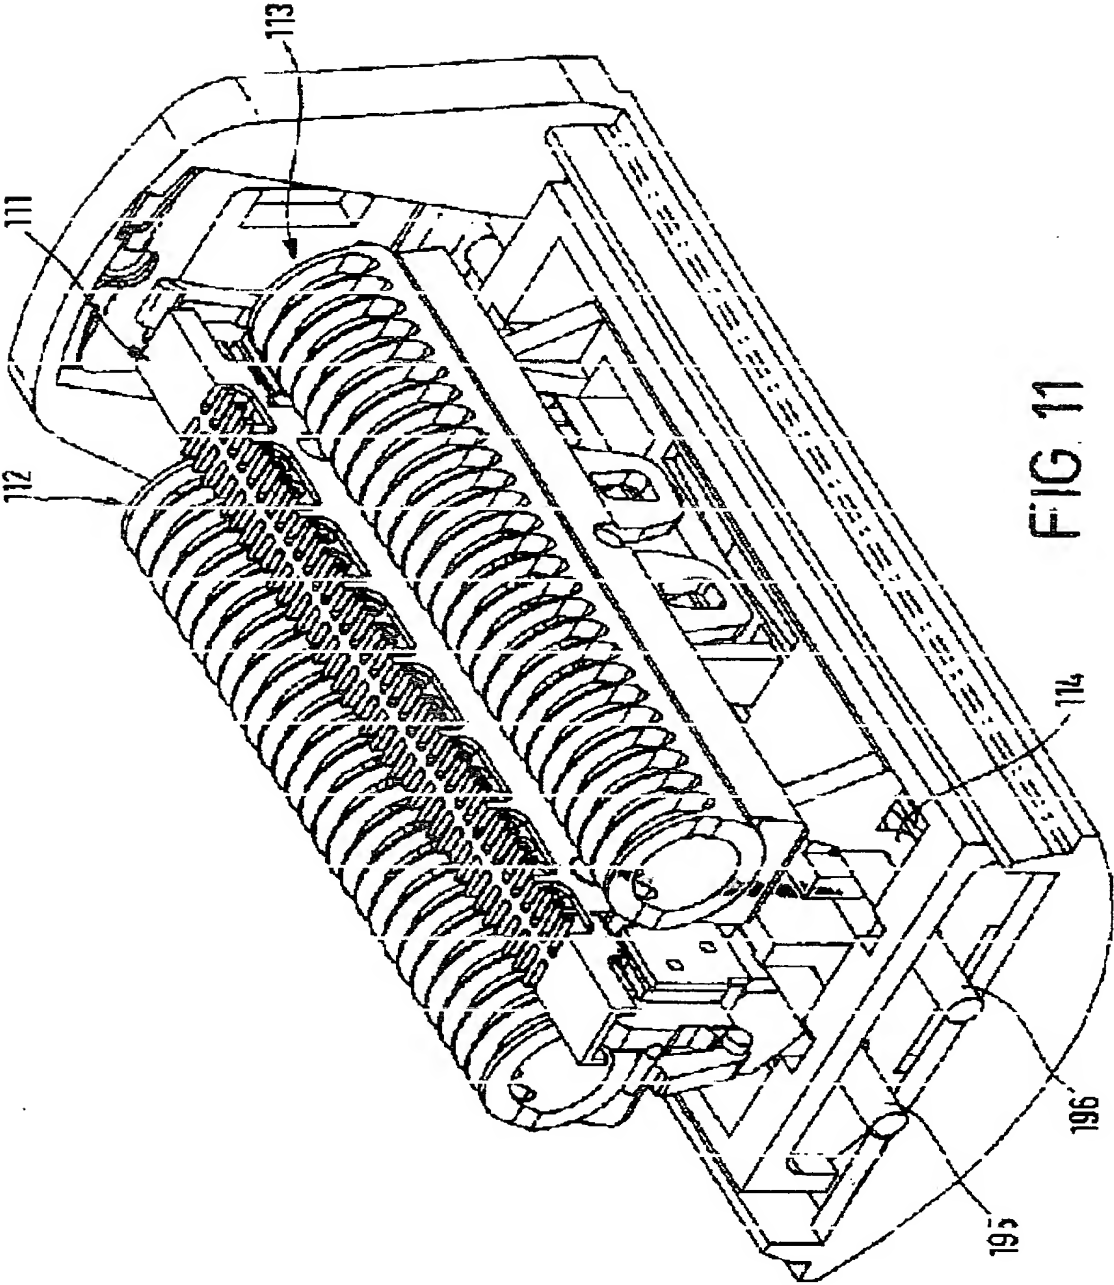


FIG. 10



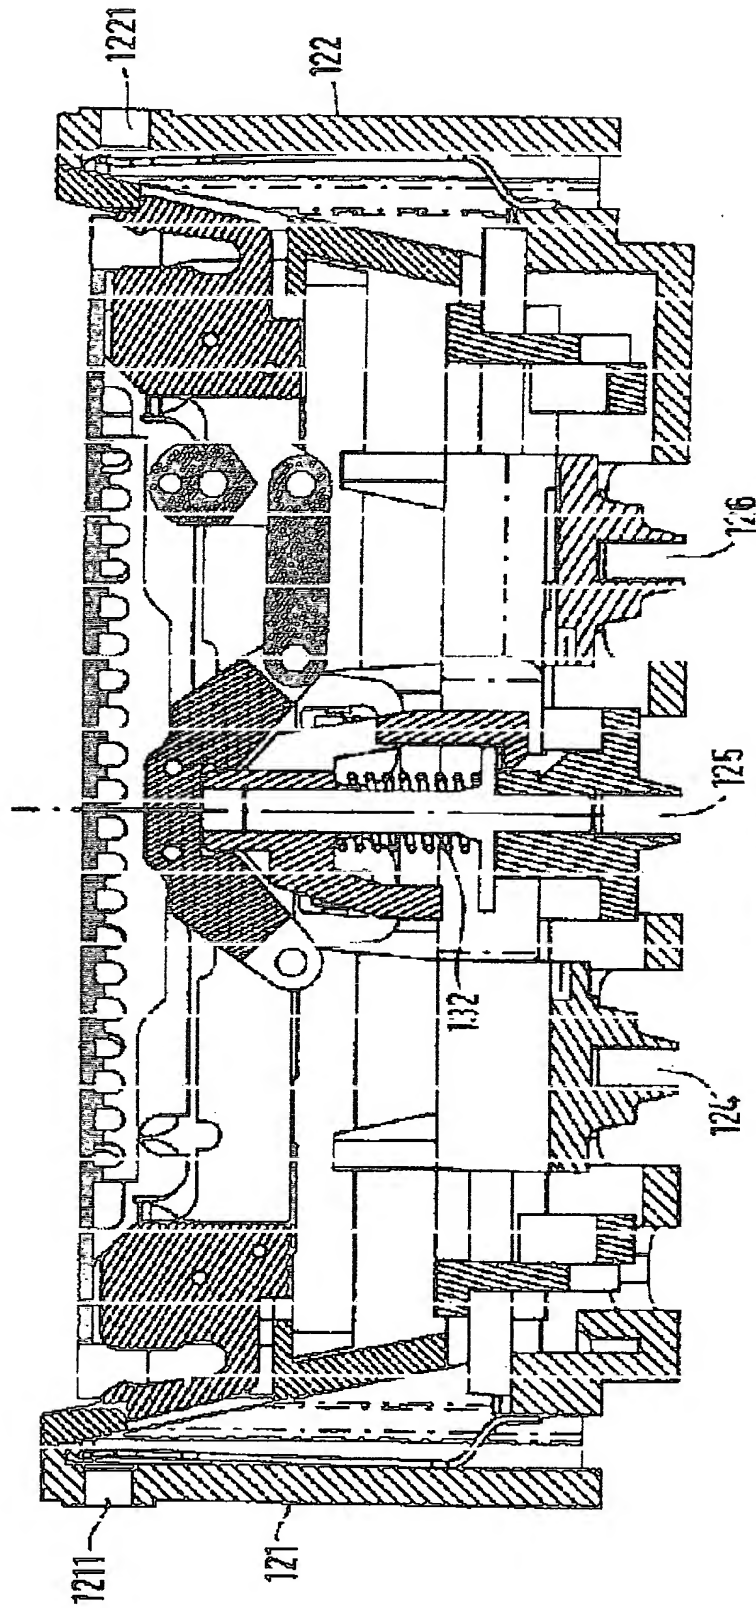


FIG. 12

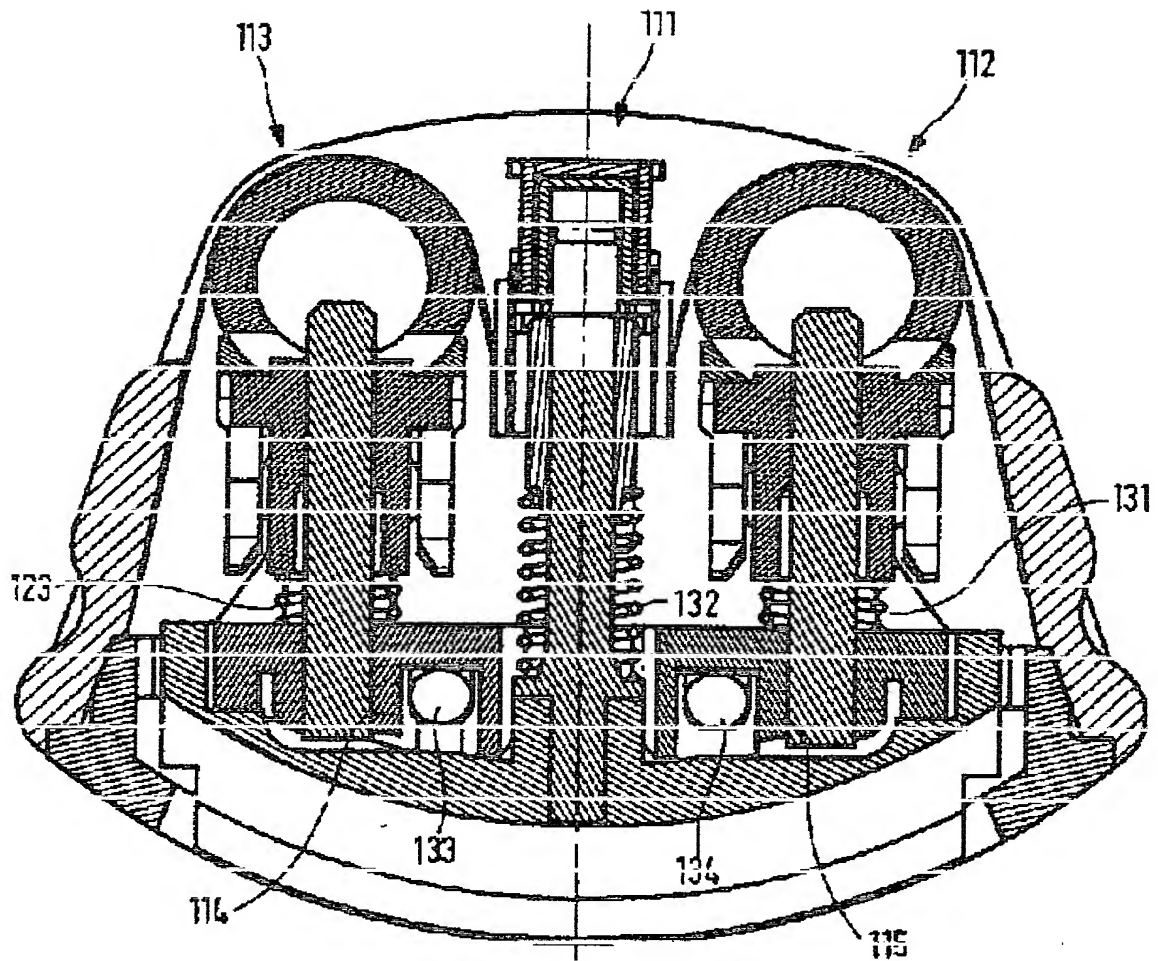


FIG. 13

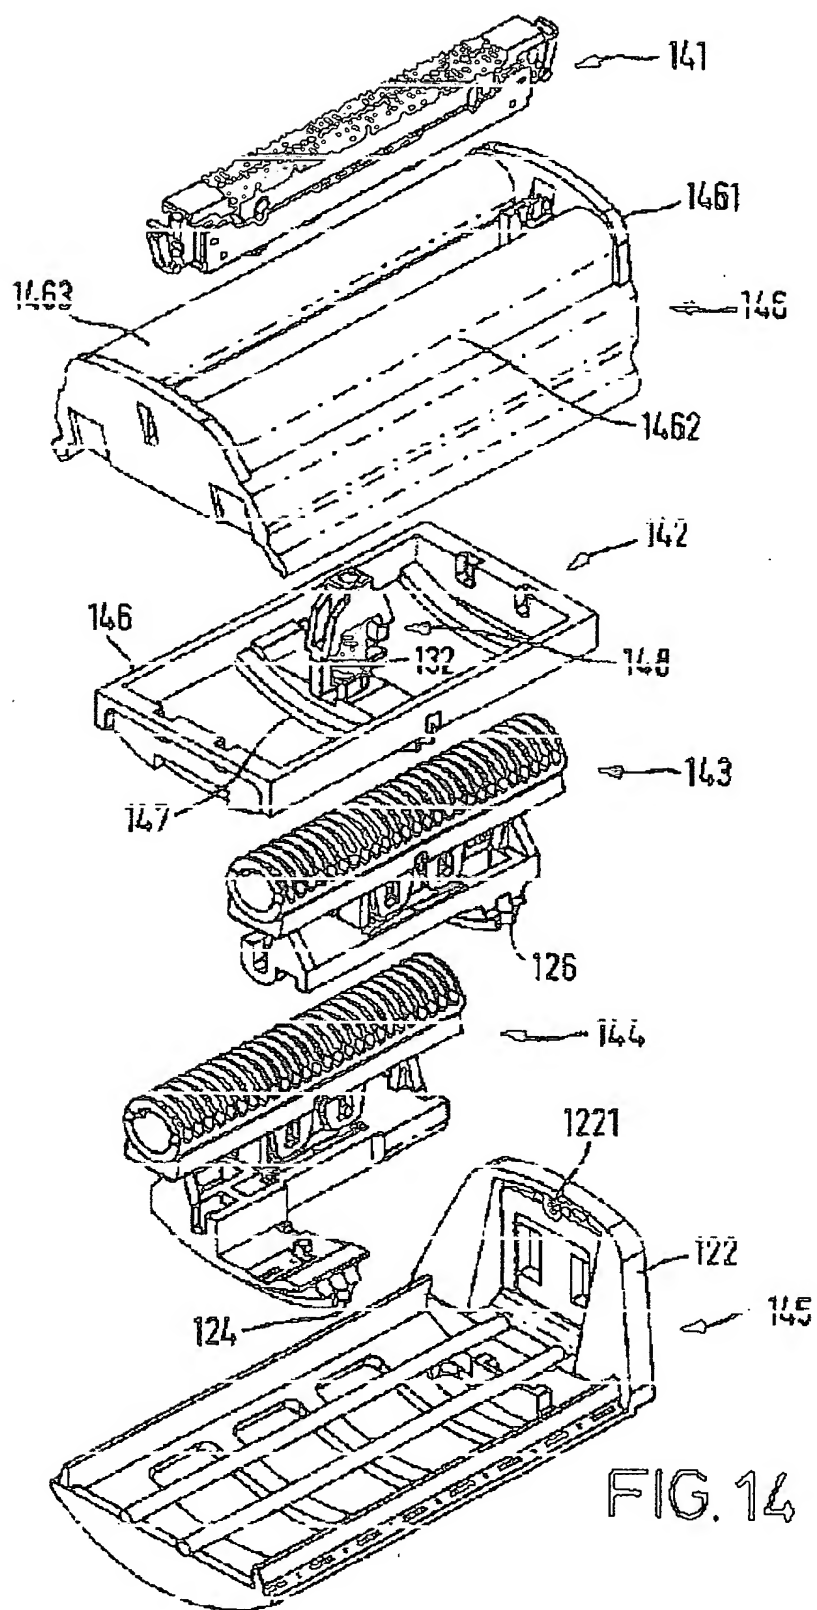


FIG. 14

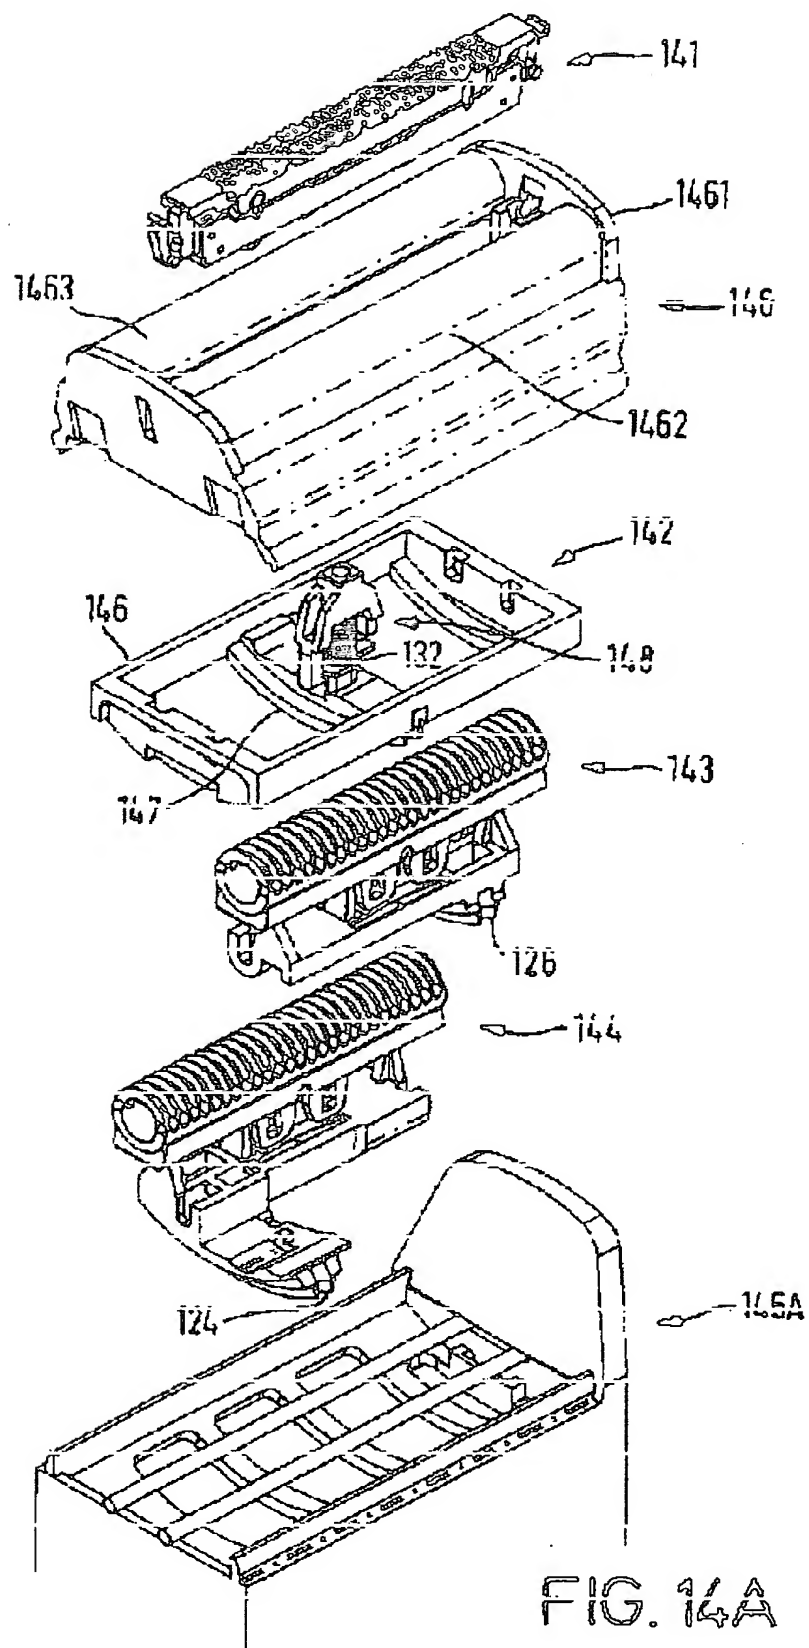


FIG. 14A

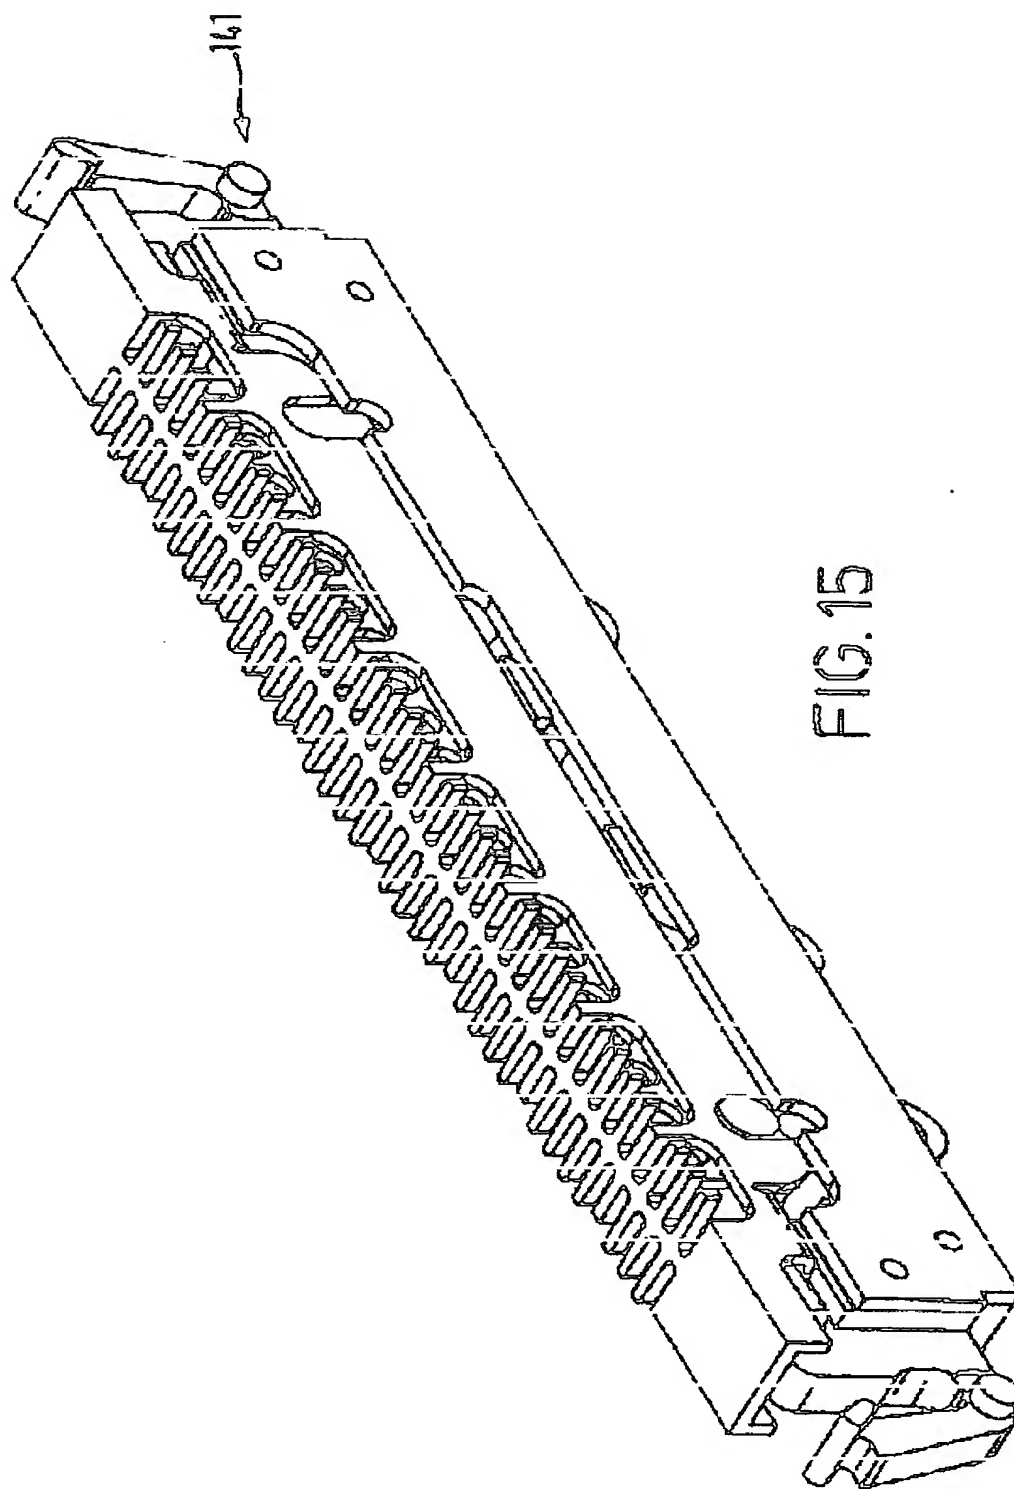
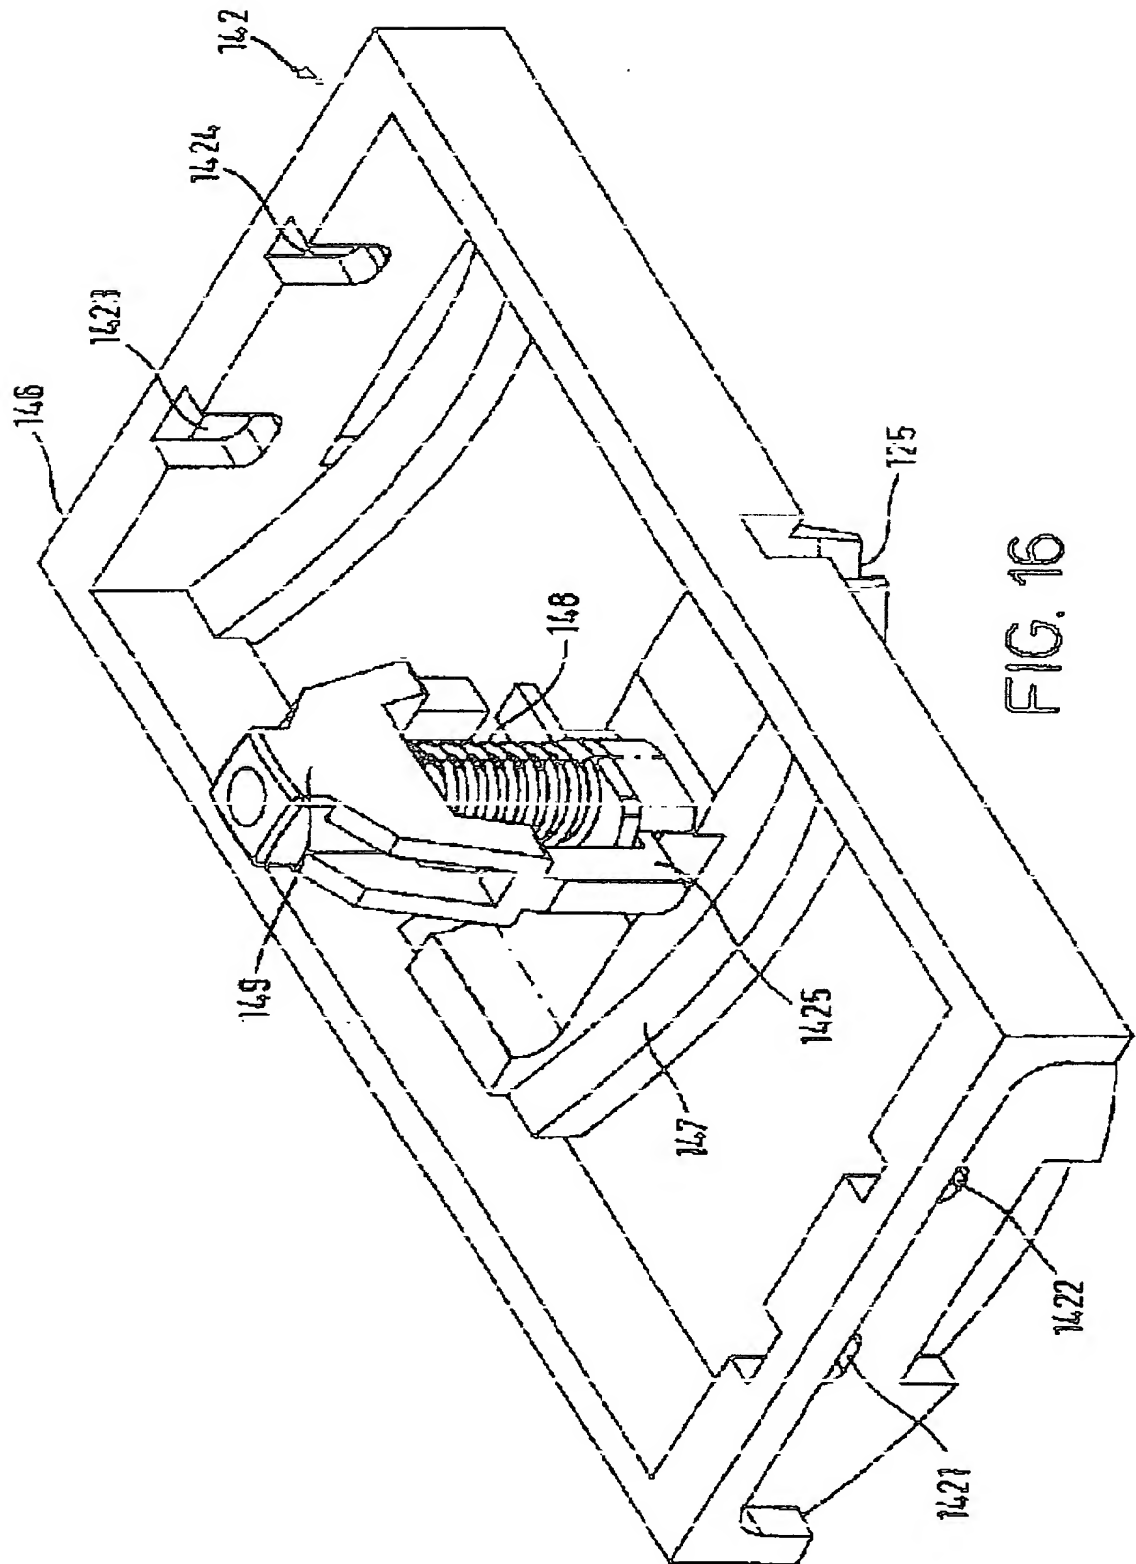


FIG. 15



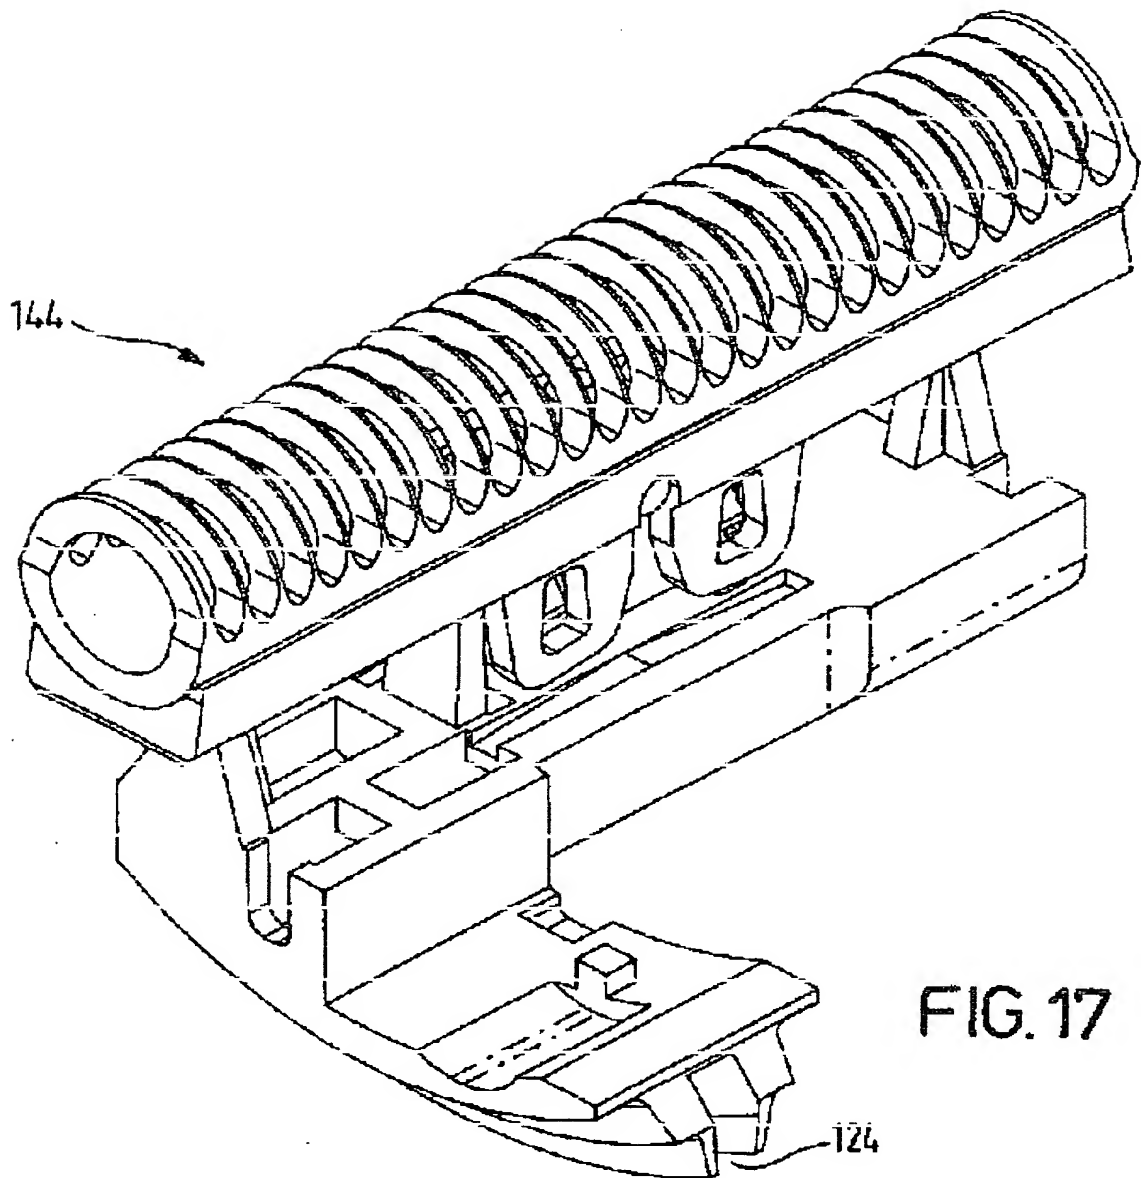
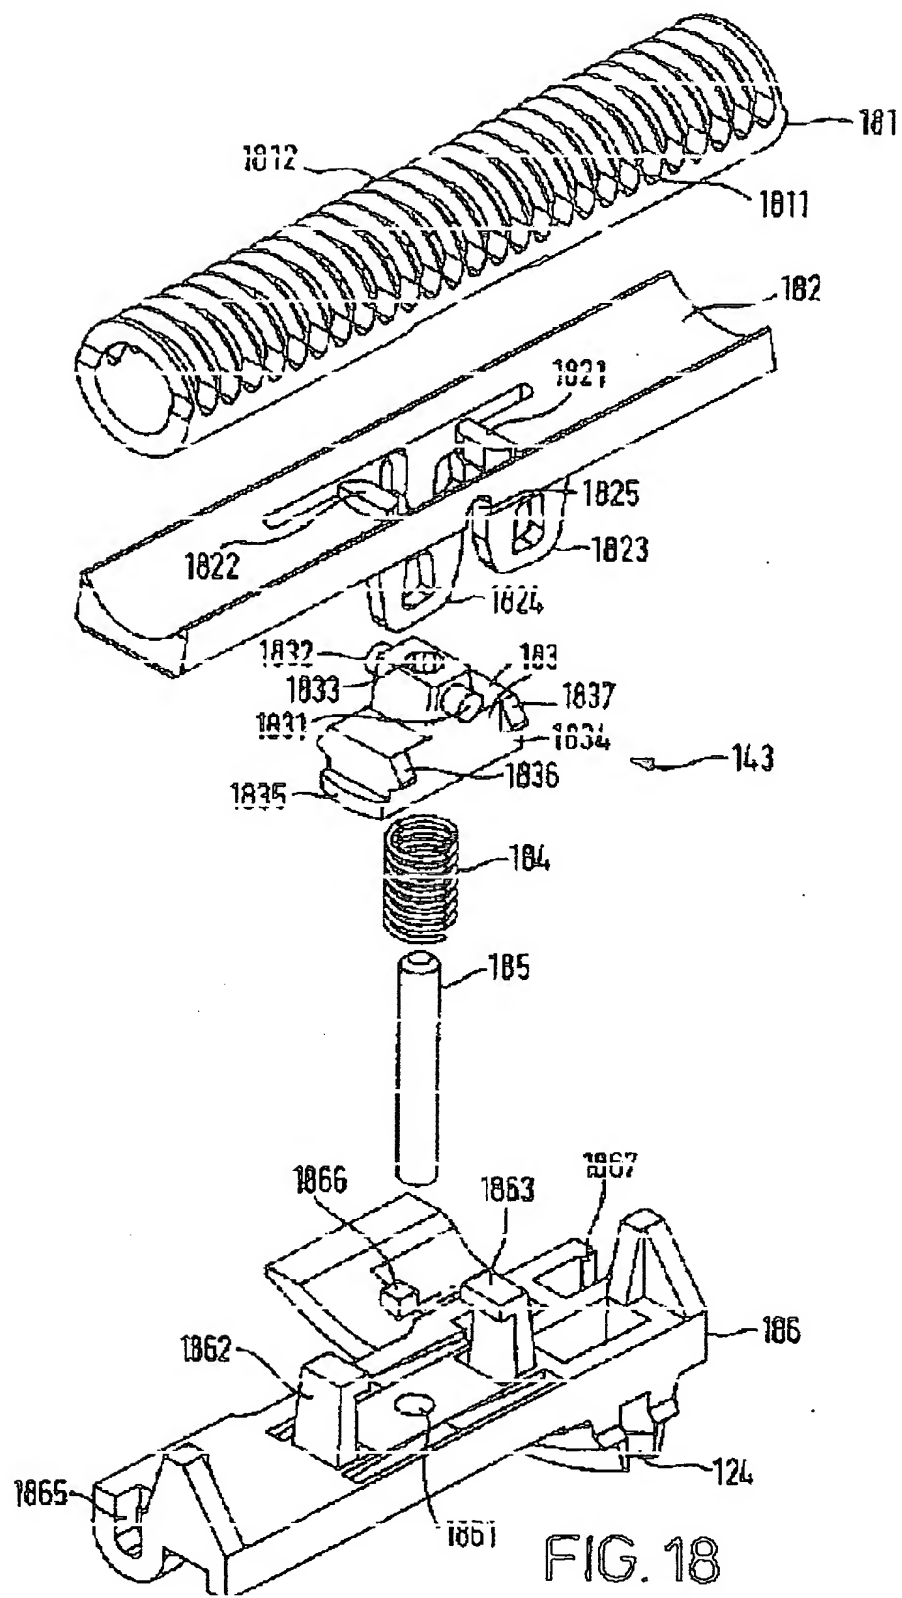
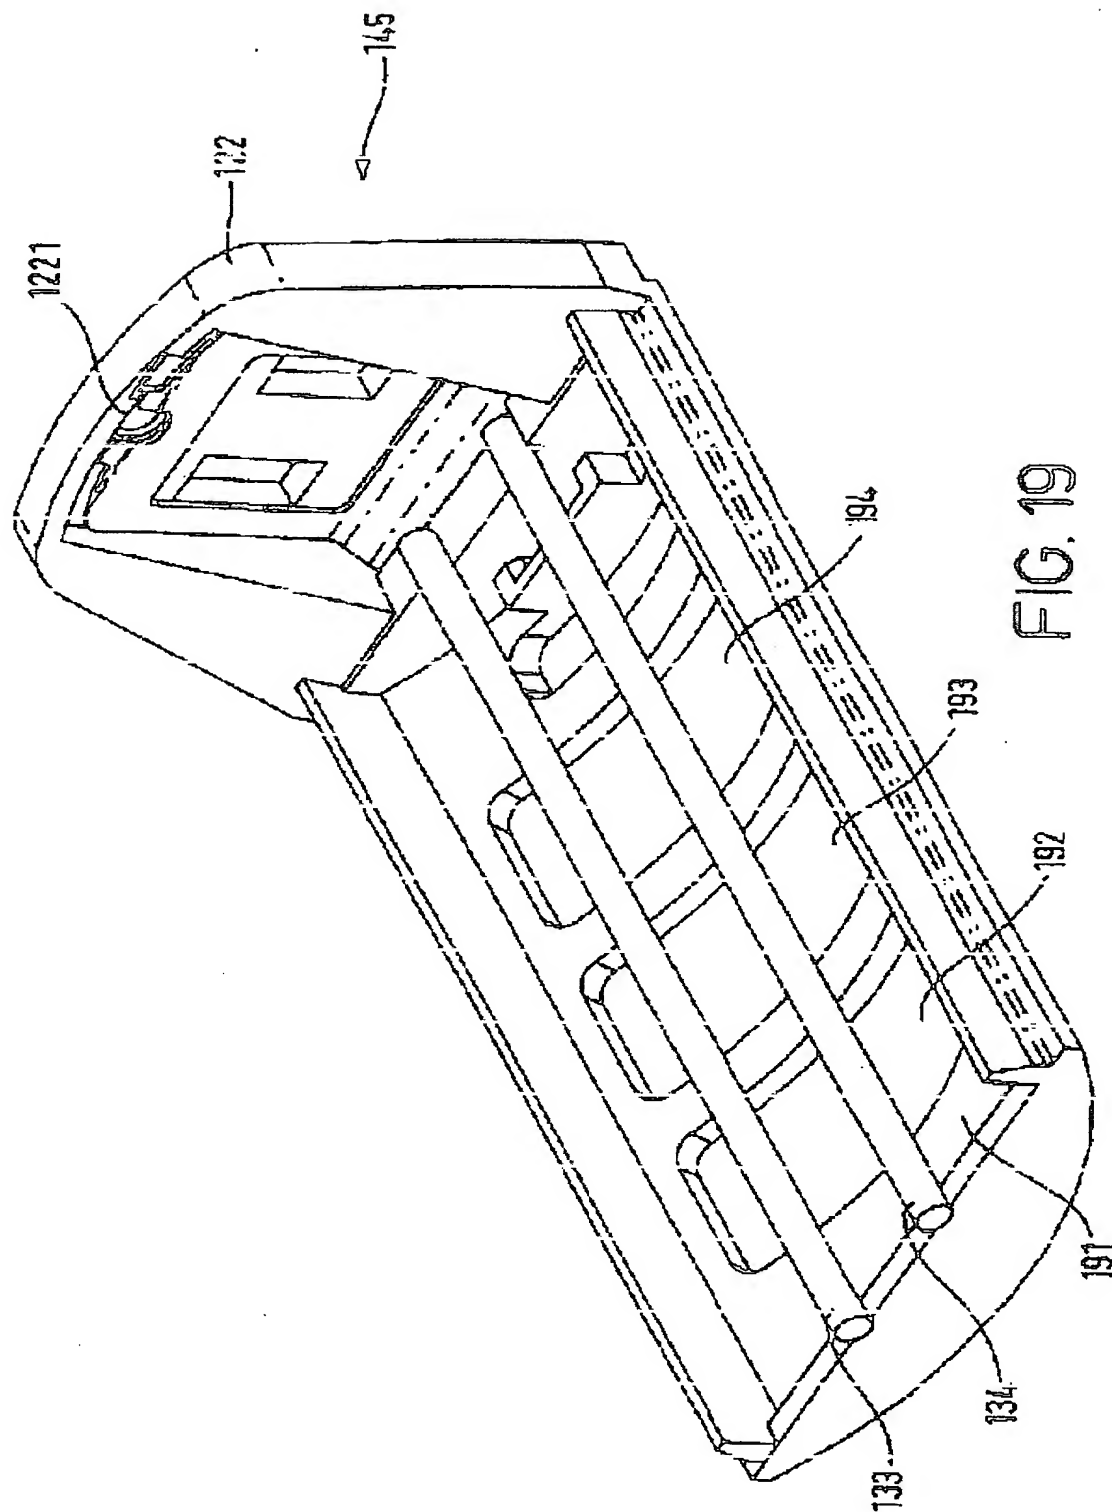


FIG. 17





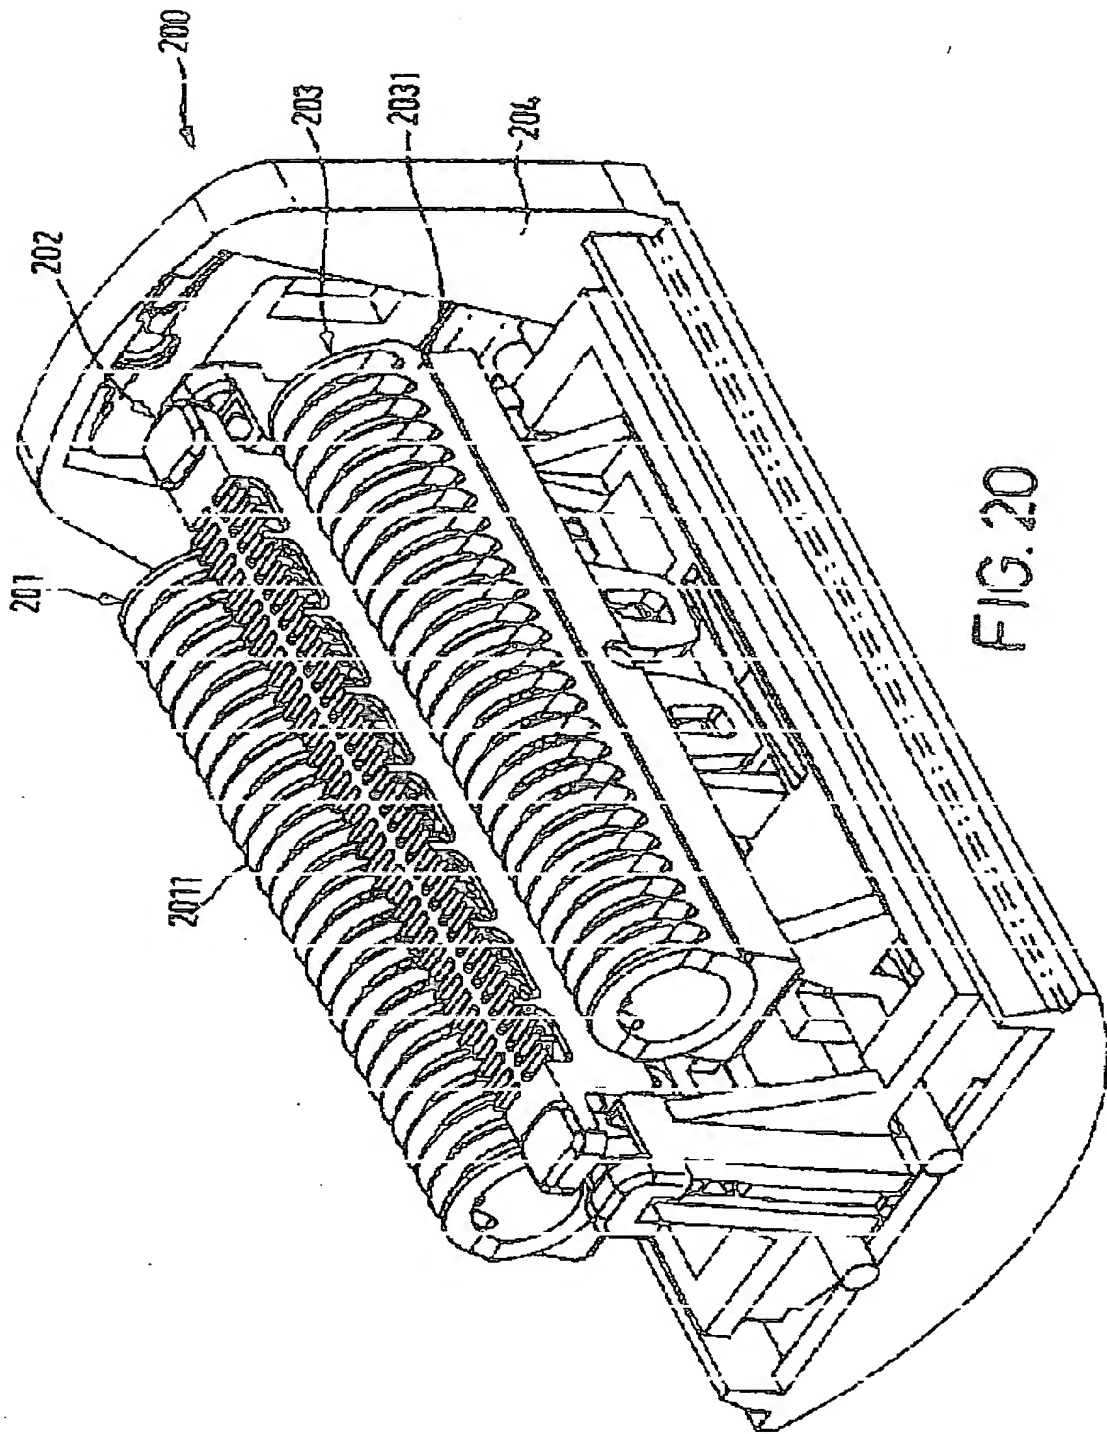


FIG. 20

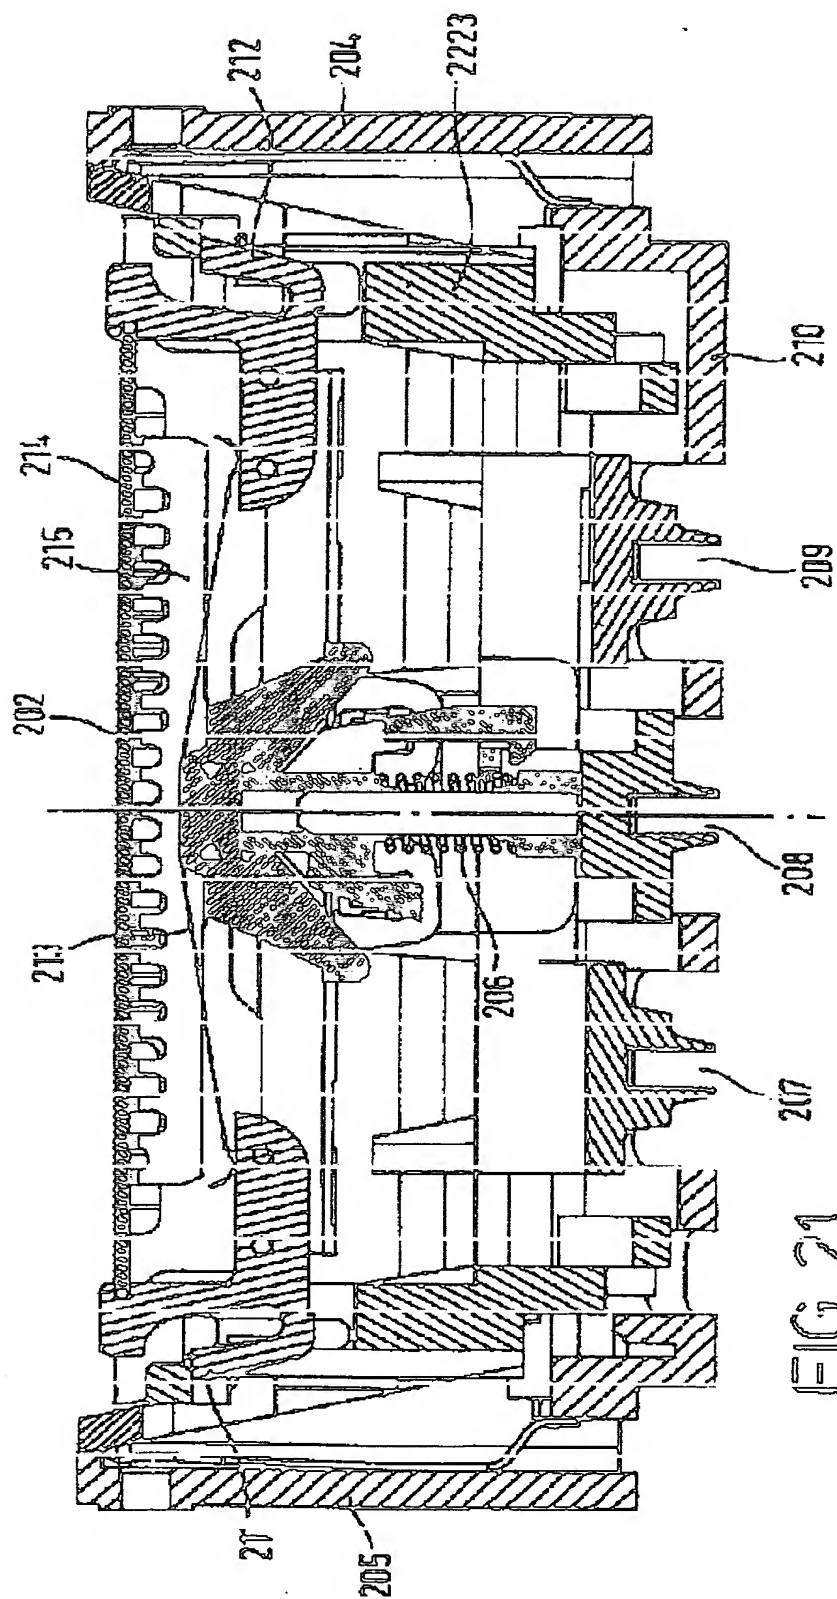


FIG. 21

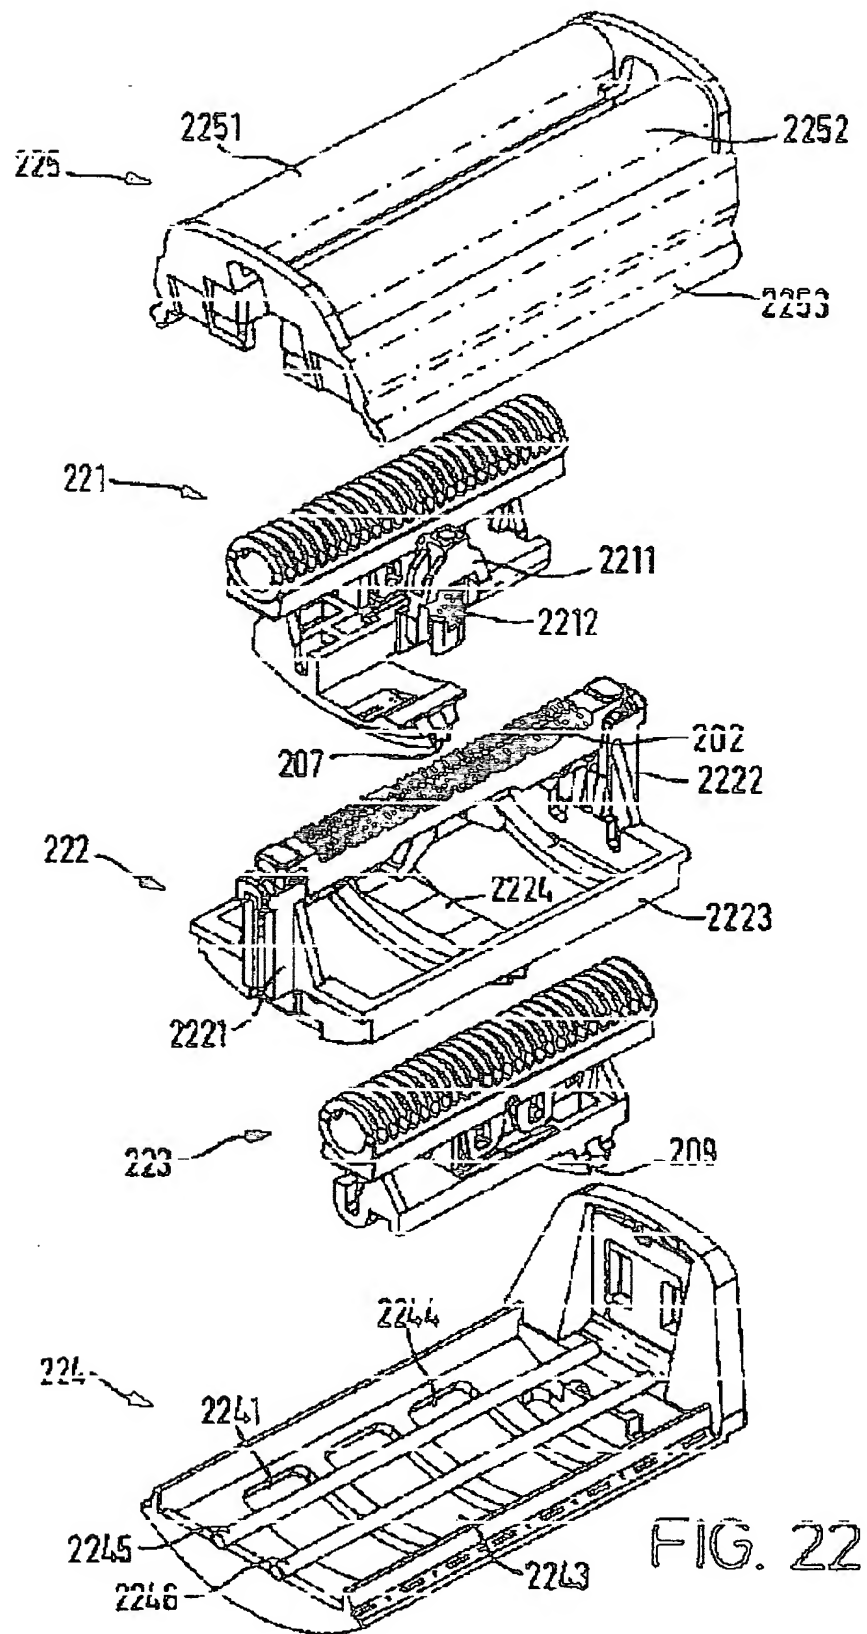


FIG. 22

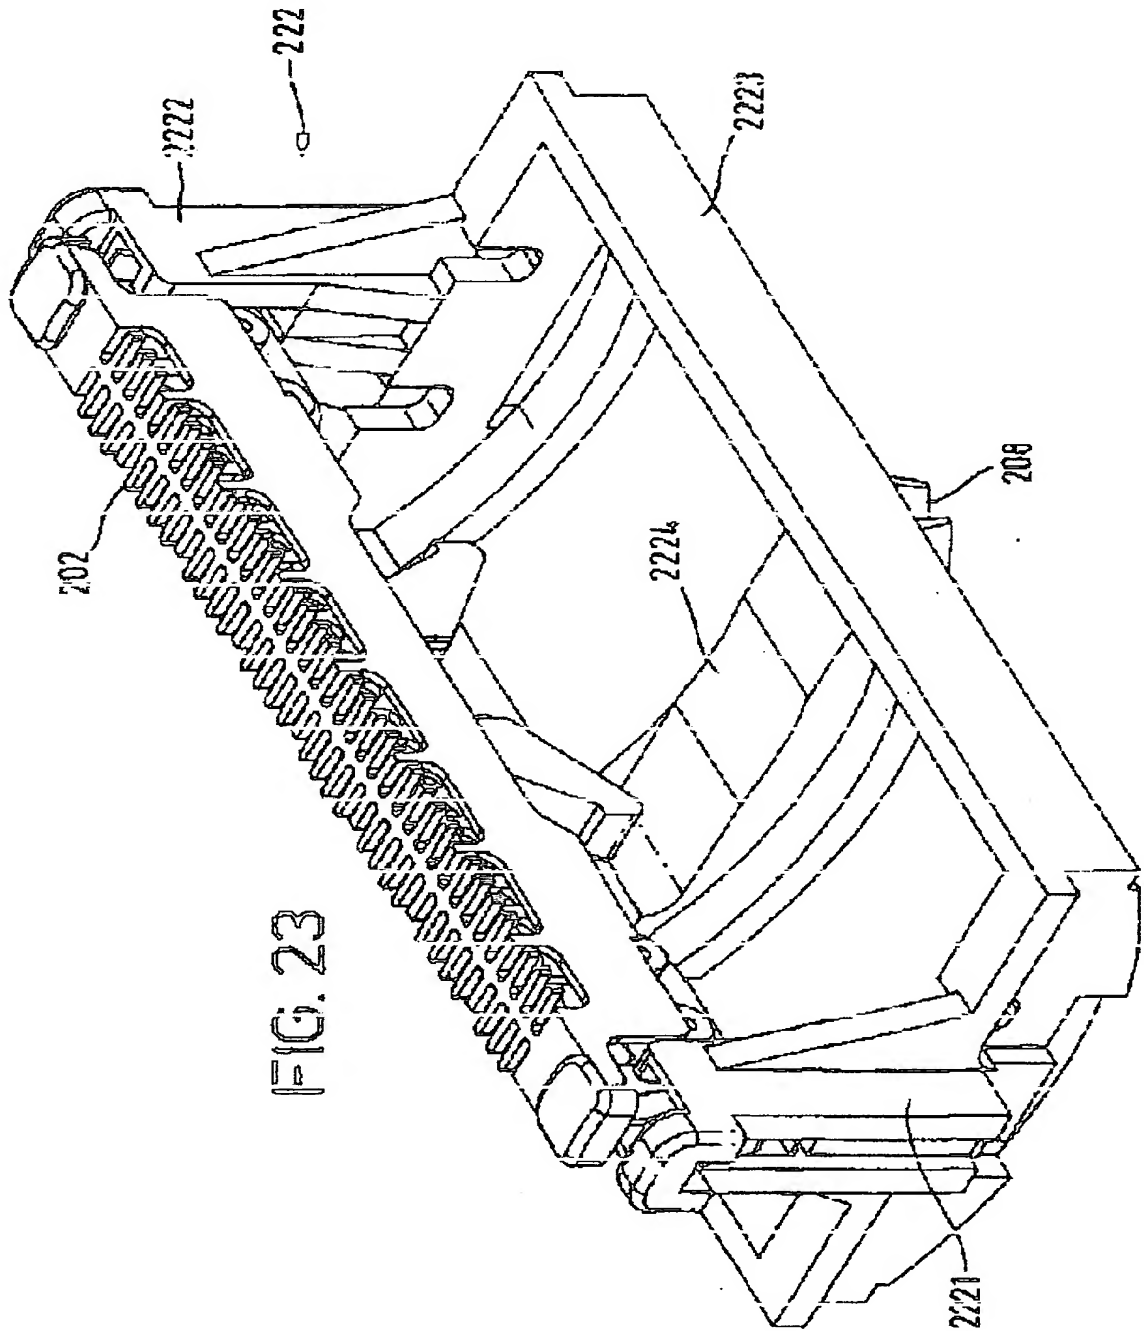
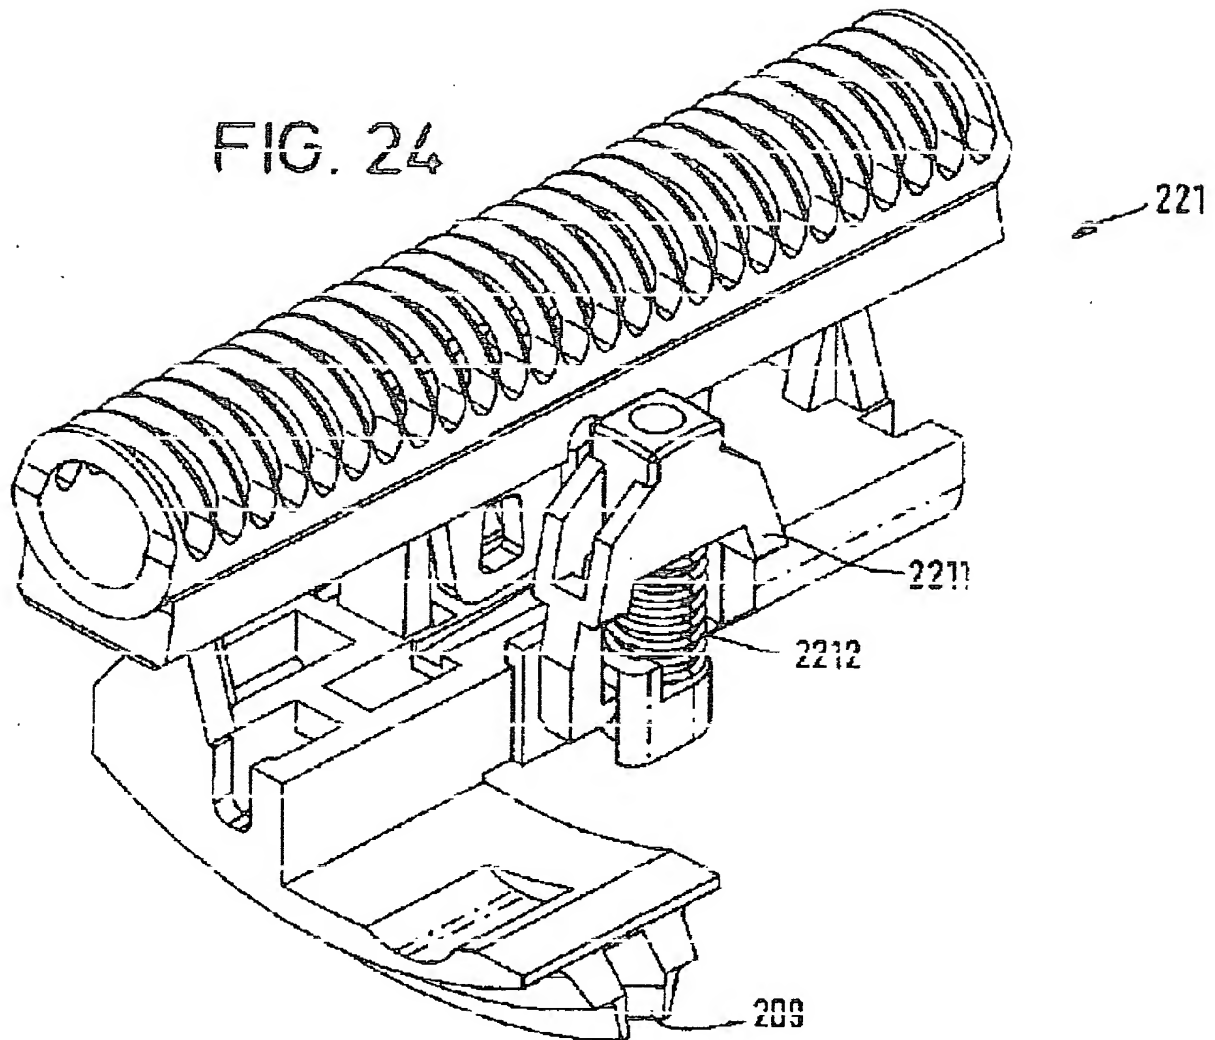


FIG. 23

FIG. 24



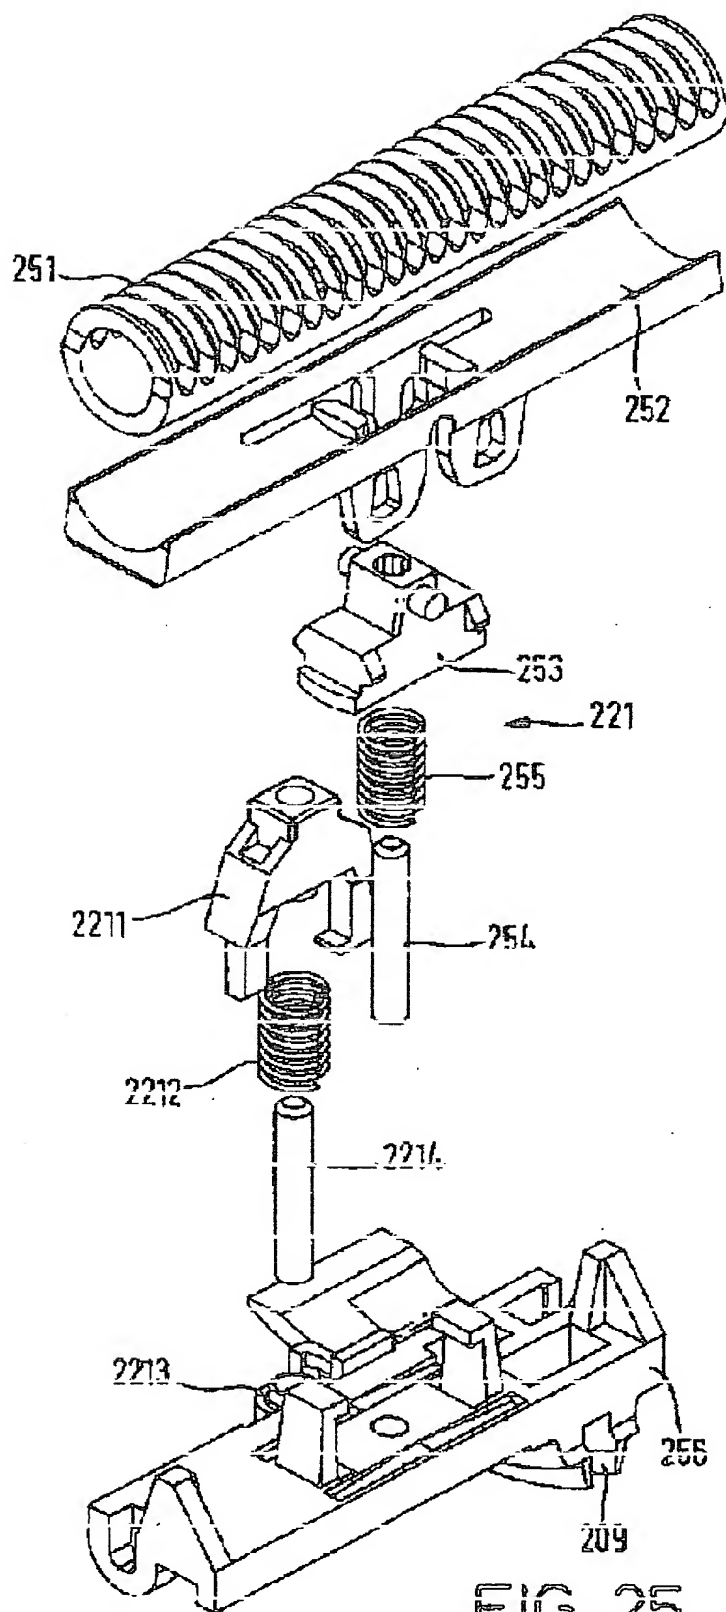


FIG. 25

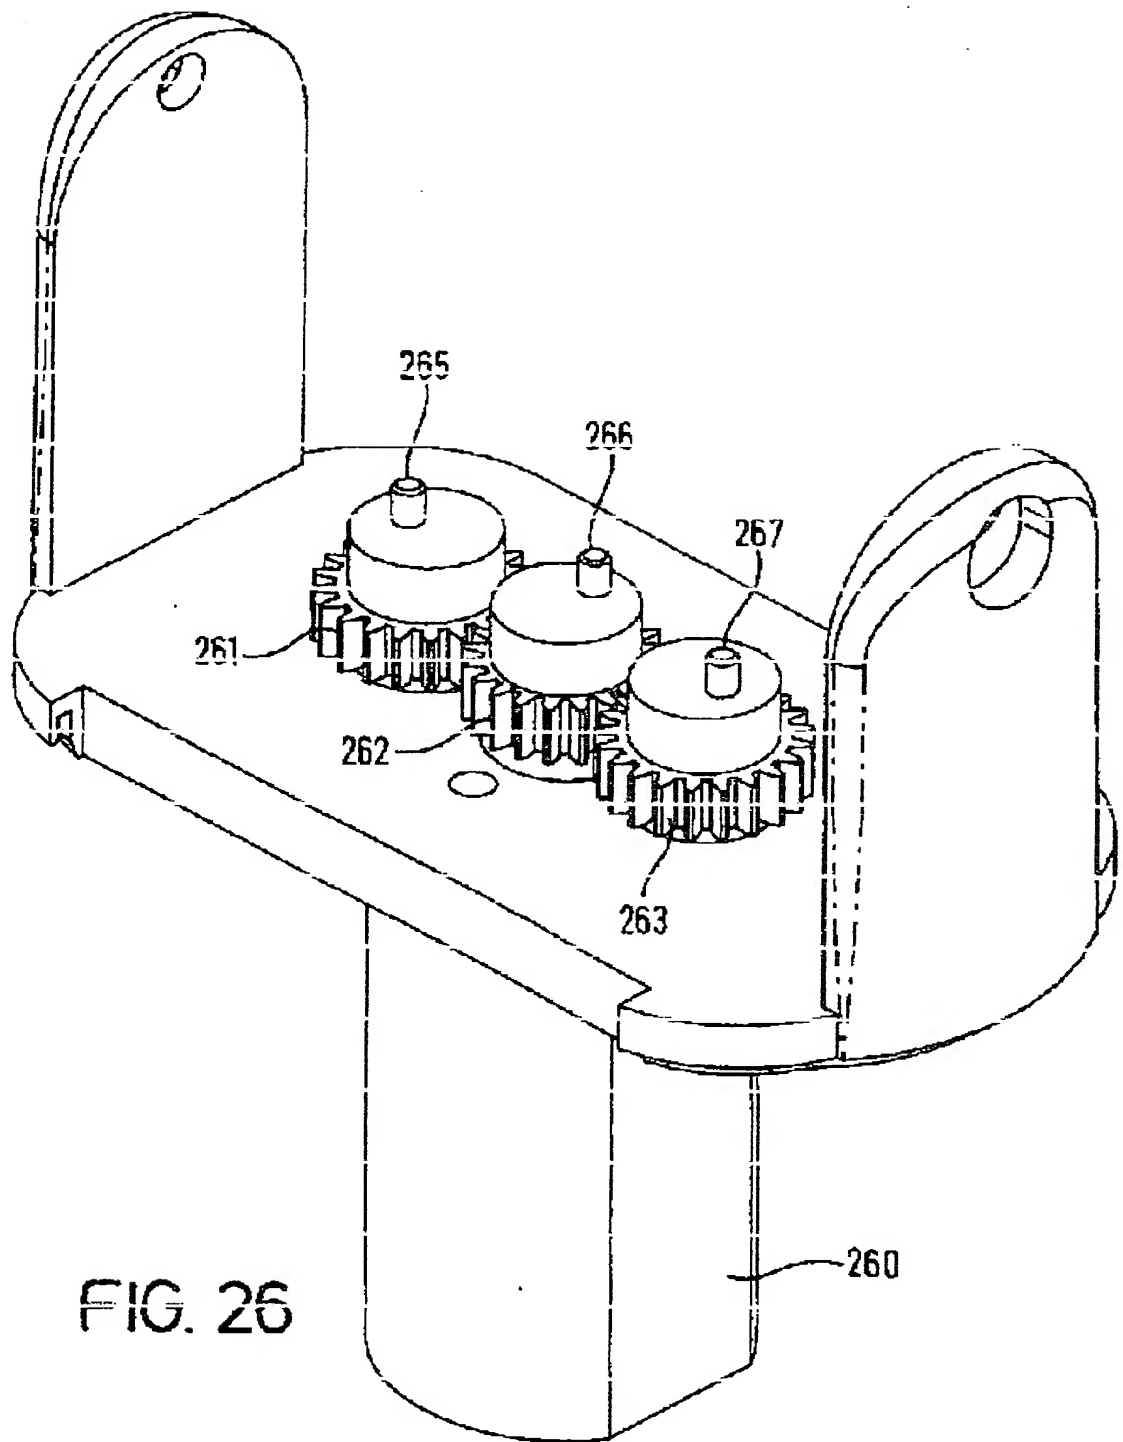


FIG. 26

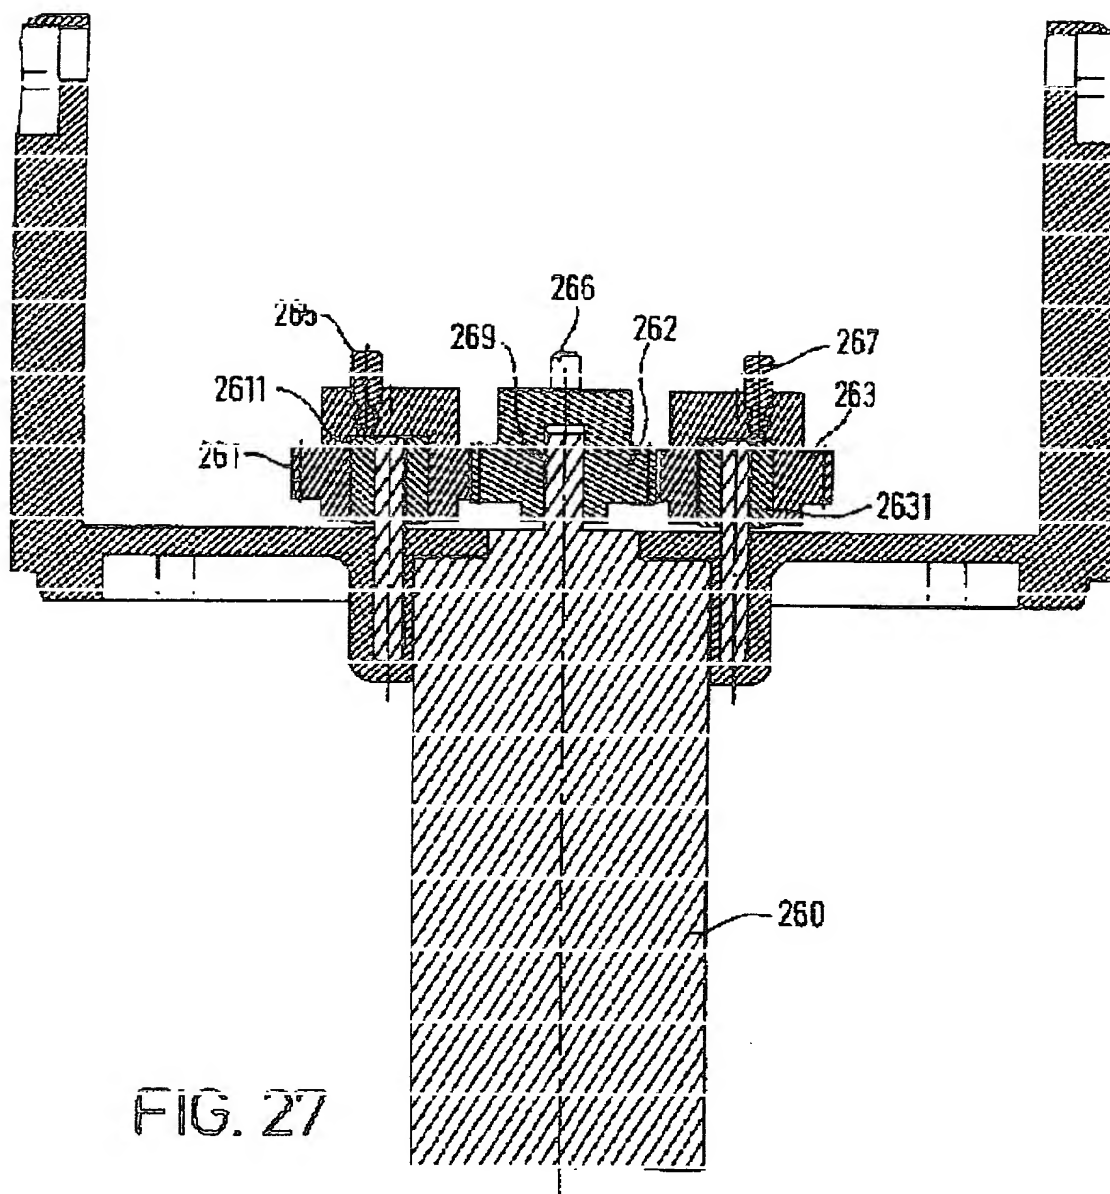


FIG. 27

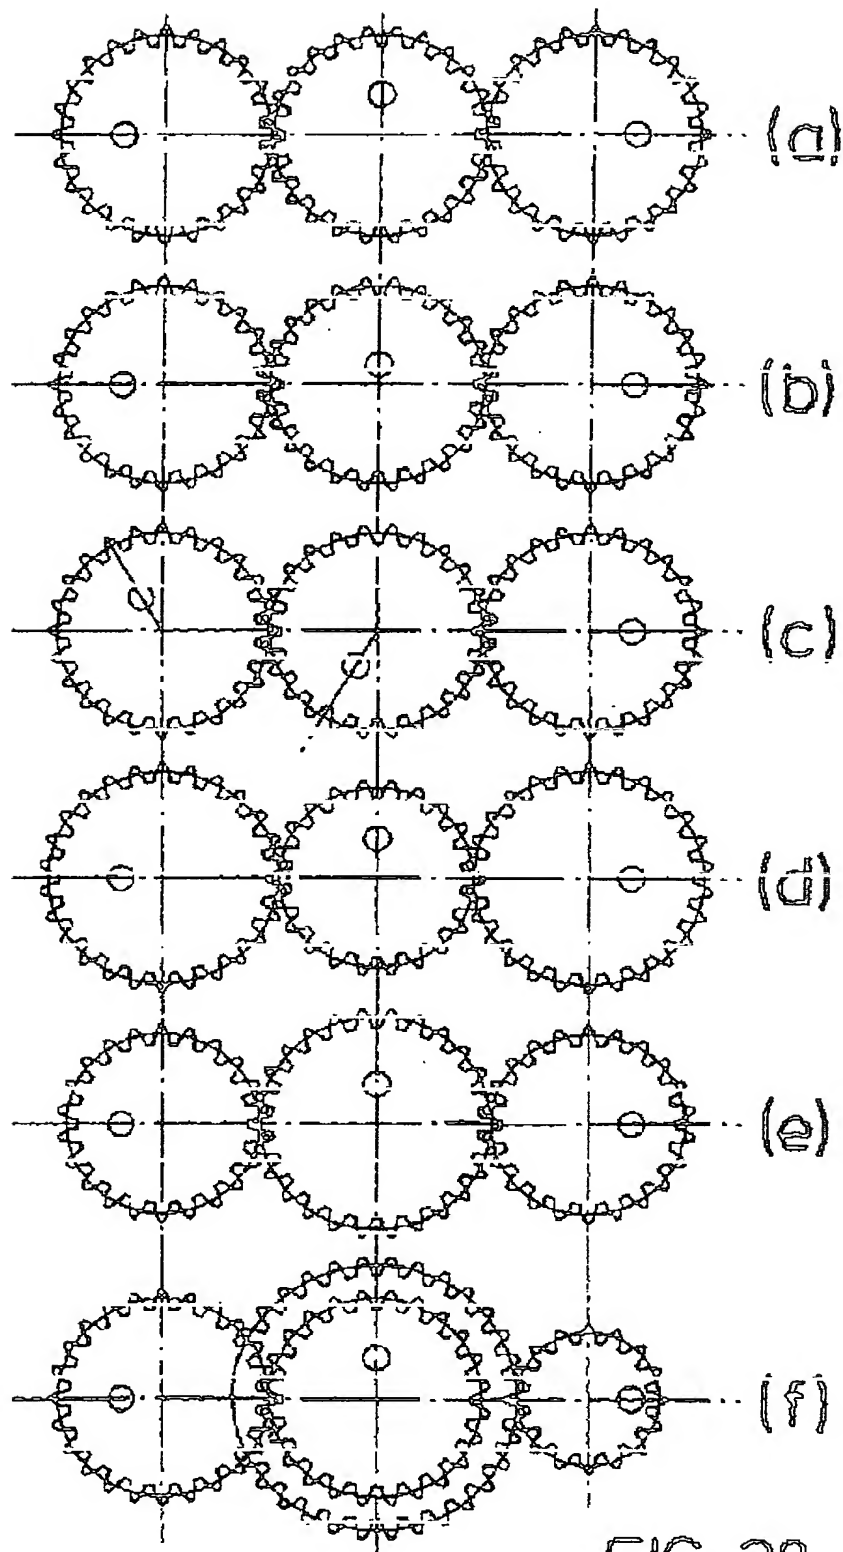
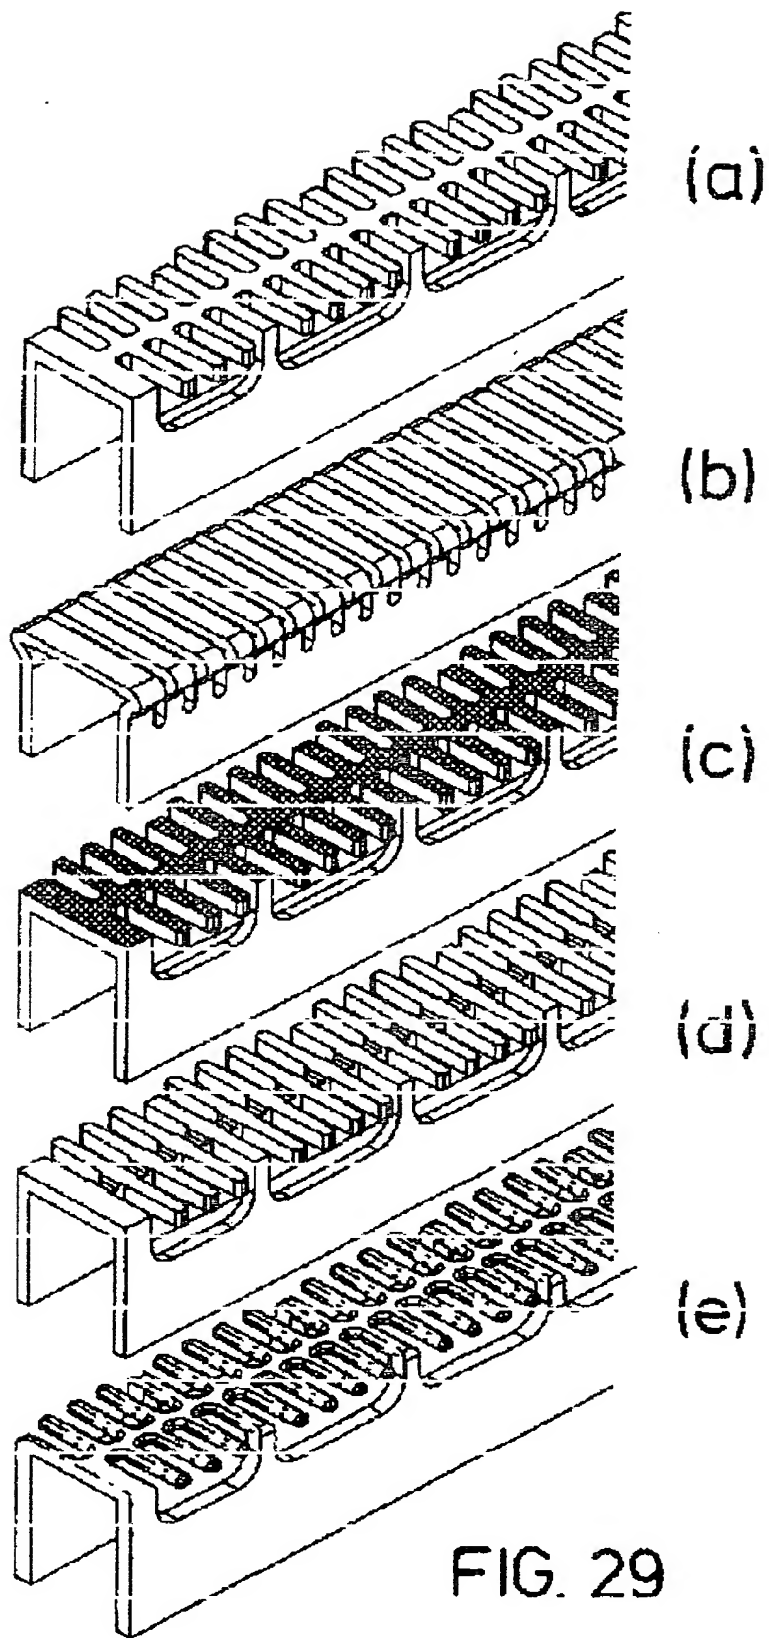
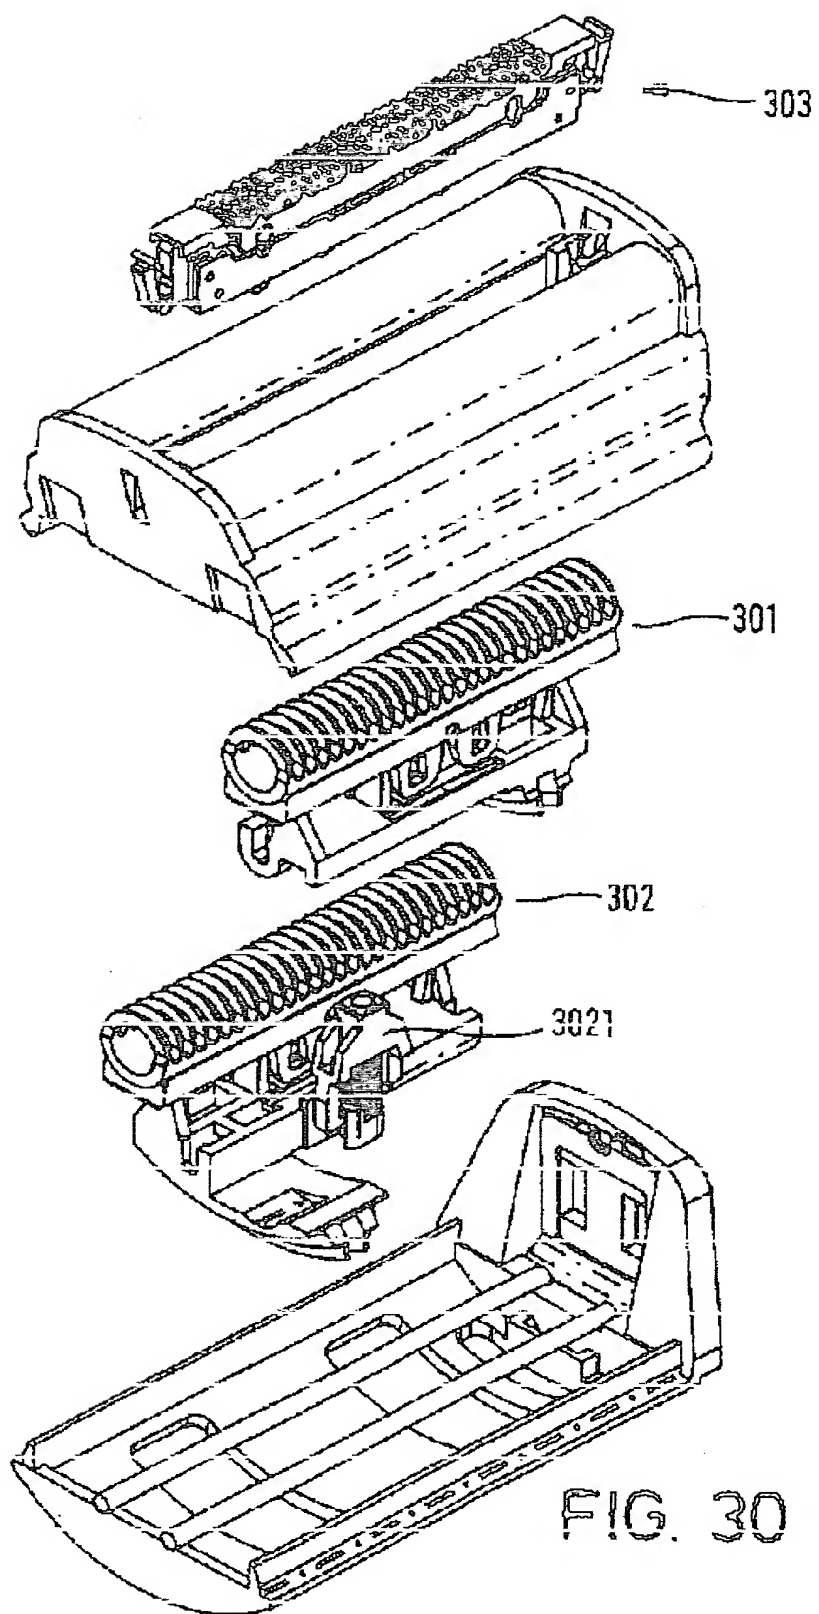


FIG. 28





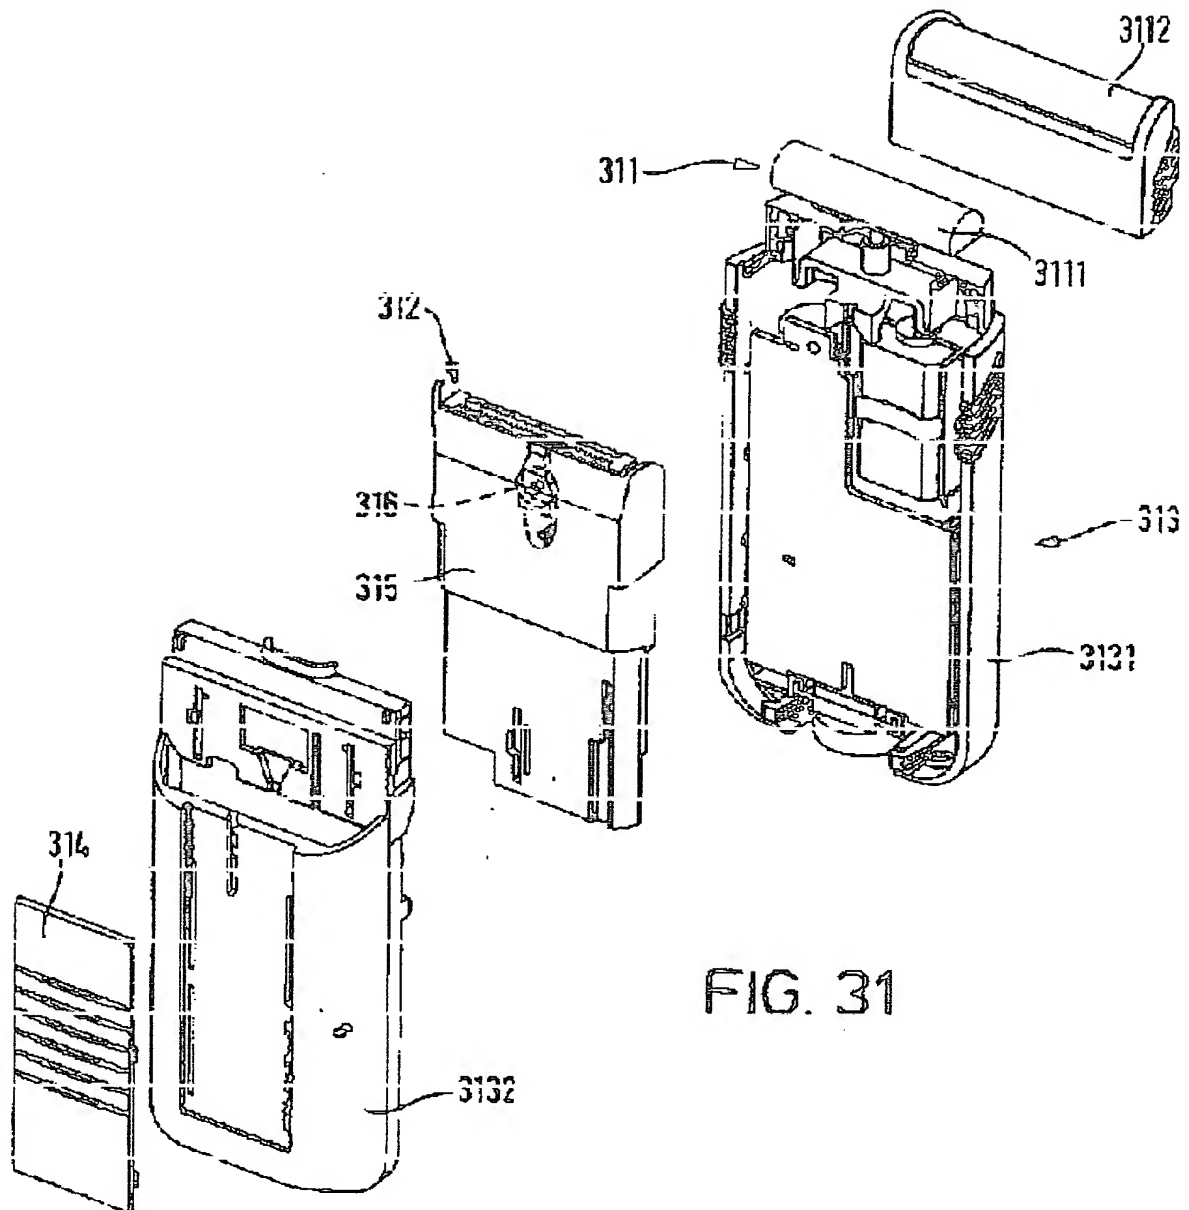


FIG. 31

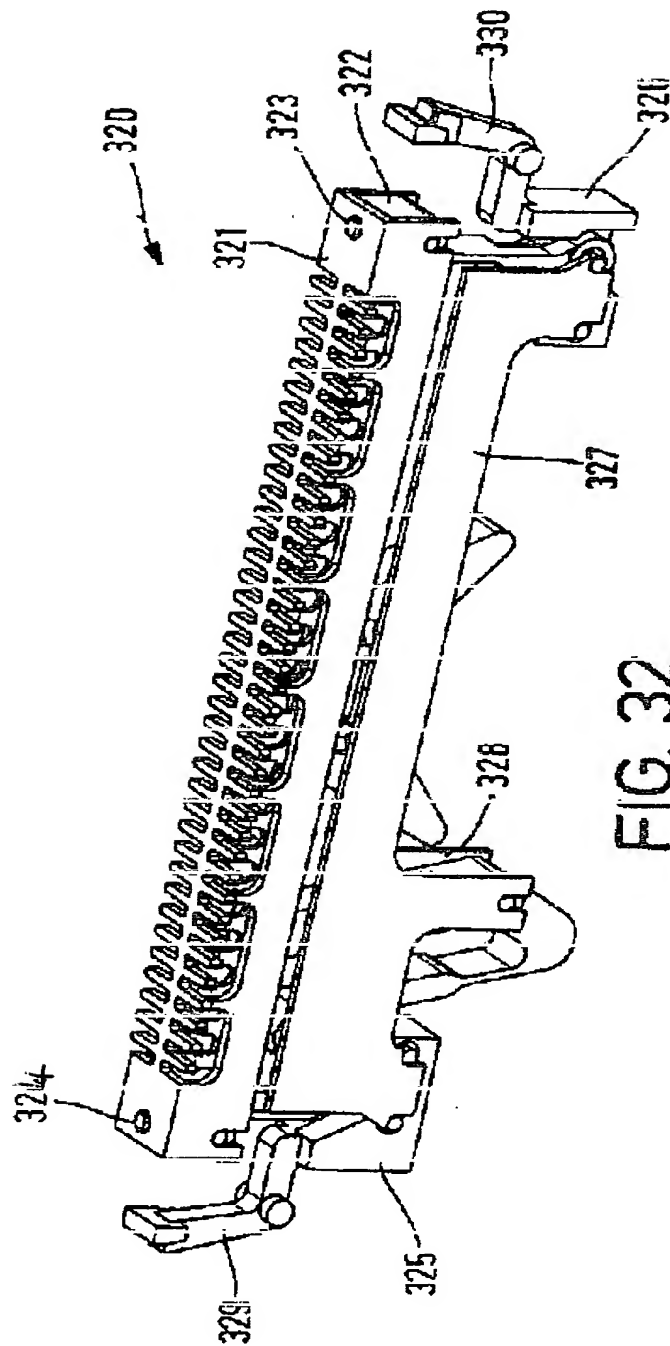


FIG. 32

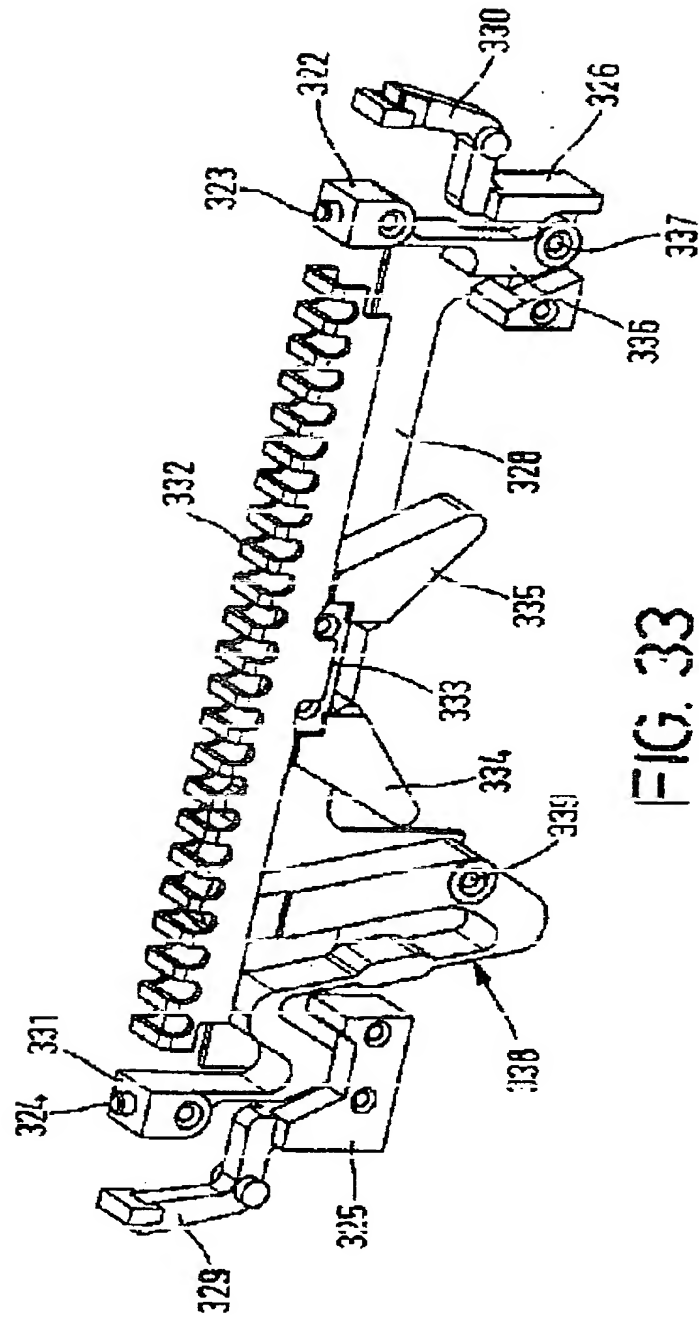


FIG. 33

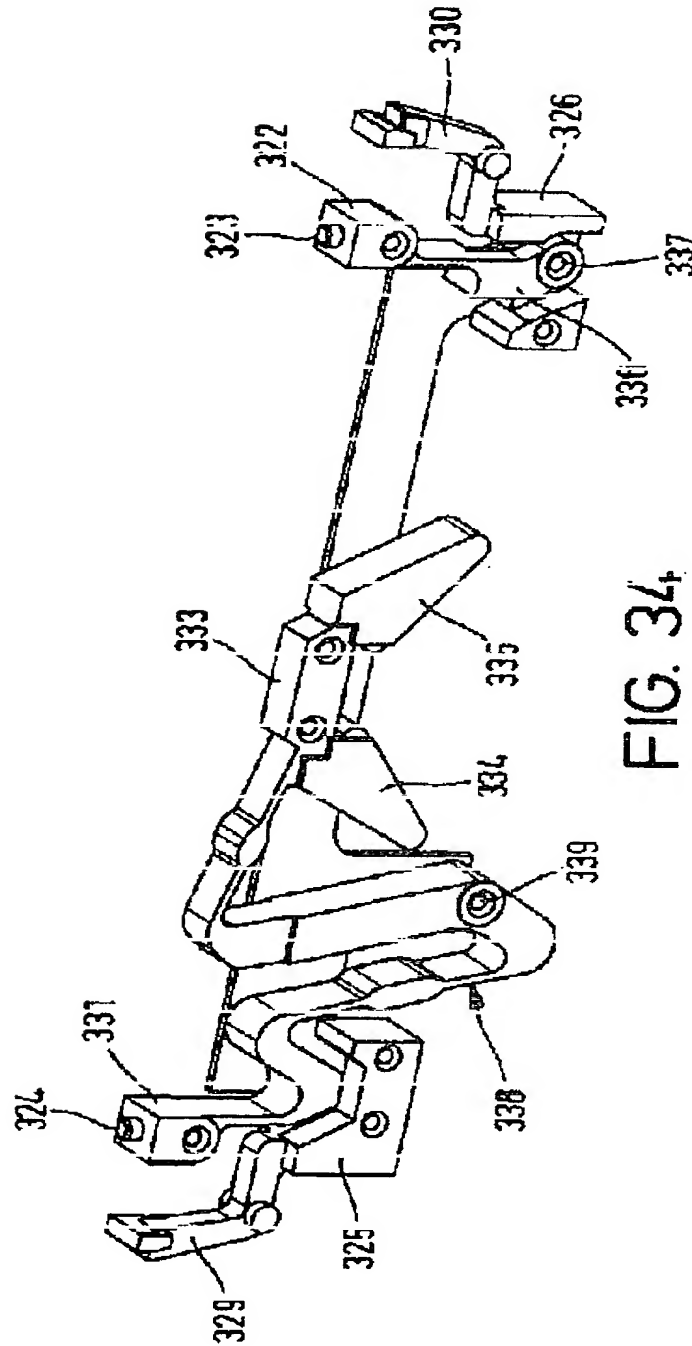
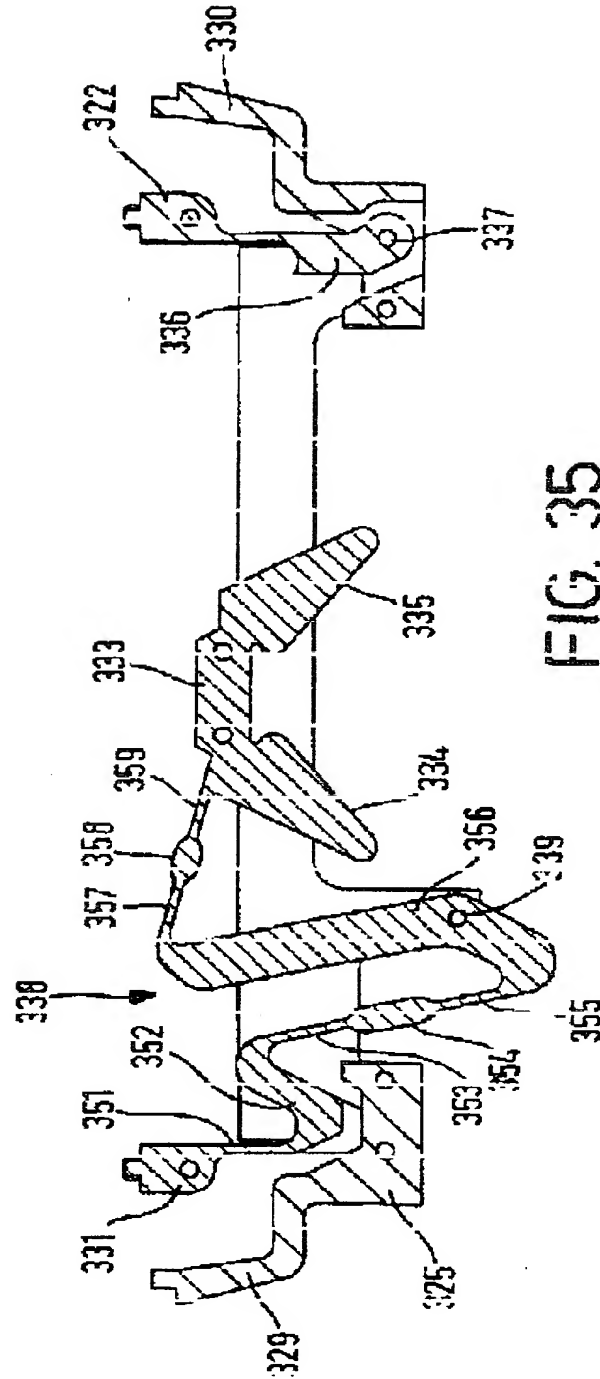
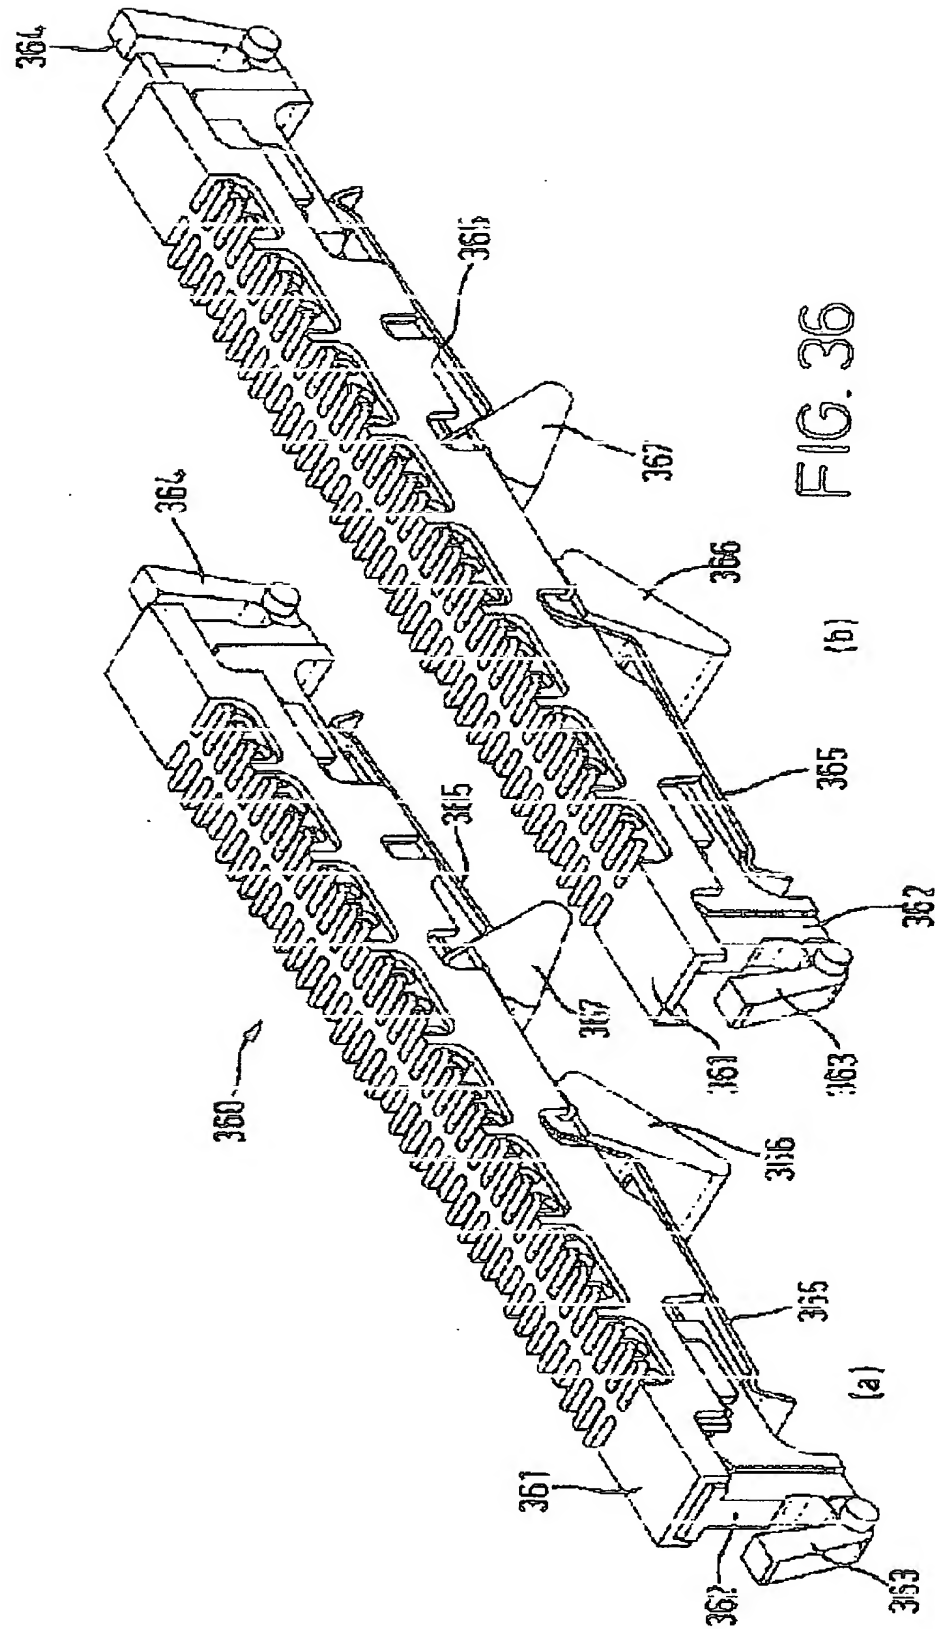


FIG. 34





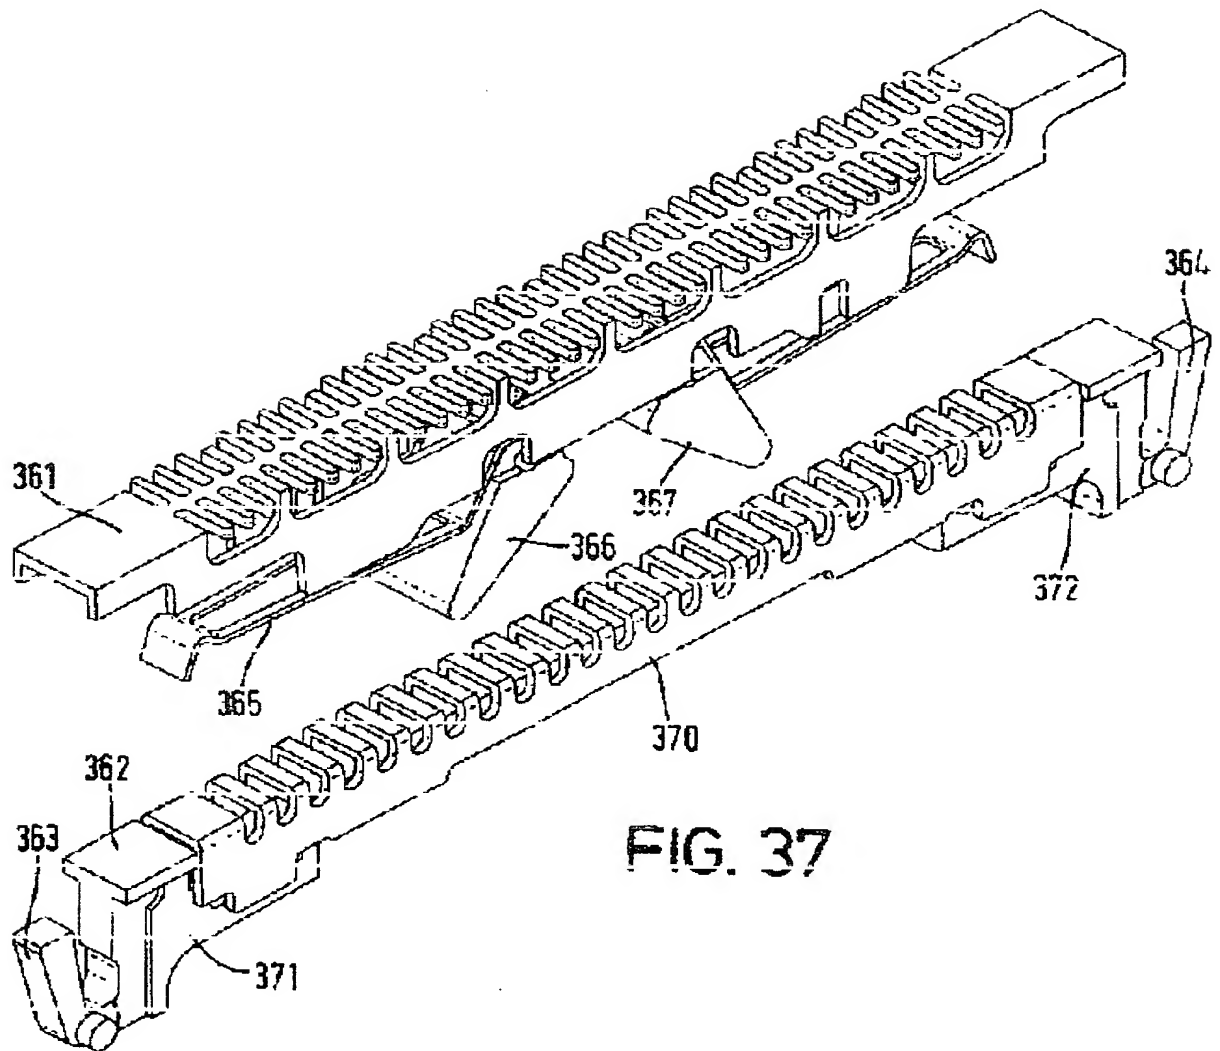


FIG. 37

